

5 é / Descriptions

9 5: .> // x □ % U ² Â Õ >ož

Precision adjustable shunt regulator in a SOT-23 Plastic Package.

□^a / Features

□ G @ Á 9 <!^a• 9 "[ê ! ‡ â v S'½ S'!½, - *! U
² - ÿ ß 9 < 5 # < x k ½ <! ‡ â W • v z Á ° > f' ! Á ÿ ß Š z Á ° > S k ... `'
' +) 7 ö Õ ä U ´ Å } L k —) í D } ož

Precise reference voltage to 2.495V; guaranteed 0.5%, 1% or 2% reference voltage Tolerance; sink current capability, 1.0mA 100mA; quick turn-on; adjustable Output voltage, $V_O = V_{ref} - 36V$; low operational cathode current, 50 A typical; 0.15 typical output impedance, Qualified to AEC-Q100 Standards for High Reliability, HF Product.

÷ / Applications


9 ¿ Â² ... ~ k U² - > y • ¼ > k á V ñ • } Lož

Linear regulators, adjustable power supply, switching power supply, Meet the stringent requirements of automotive applications.

Ã w] Ô · / Equivalent Circuit



• Ů - æ / Pinning

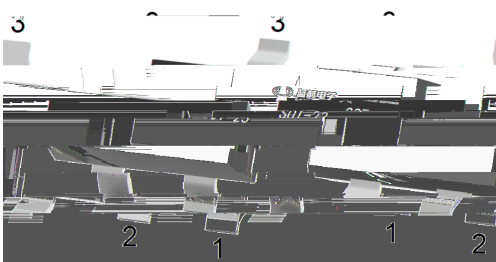

PIN1 y R

PIN 2 y K

PIN 3 y A

, M V / Marking

Marking	Q431
---------	------

@ f Parameter	... Z Symbol	f > Rating	% y Unit
Cathode to Anode Voltage	V _{KA}	37	V
Cathode Current Range, Continuous	I _K	-100 +100	mA
Reference Input Current Range, Continuous	I _{REF}	0.05 +10	mA
Power Dissipation	P _D	370	mW
Operating Ambient Temperature	T _{amb}	-40 125	
Junction Temperature	T _j	150	
Storage Temperature Range	T _{stg}	-65 150	

@ f Parameter	... Z Symbol	y i Ú ^ Test Conditions	Â 4 > Min	Á ° > Typ	Â Ý > Max	% y Unit
Reference Input Voltage	V _{REF}	V _{KA} =V _{REF} I _K =10mA(A=0.5%)	2.483	2.495	2.507	V
		V _{KA} =V _{REF} I _K =10mA(B=1%)	2.470	2.495	2.520	V
		V _{KA} =V _{REF} I _K =10mA(2%)	2.445	2.495	2.545	V
Deviation of Reference Input Voltage Over-Temperature	Δ V _{REF} / Δ T	V _{KA} =V _{REF} I _K =10mA T _A =-40 125		4.5	25	mV

Ratio of Change in
Reference Input Voltage

Electrical Characteristic Curve

Fig 1 Cathode Current
Vs Cathode Voltage

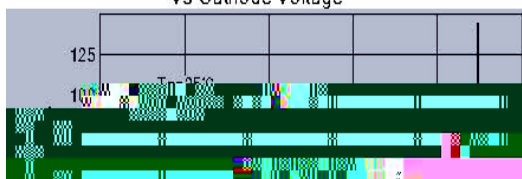


Fig 2 Cathode Current
Vs Cathode Voltage



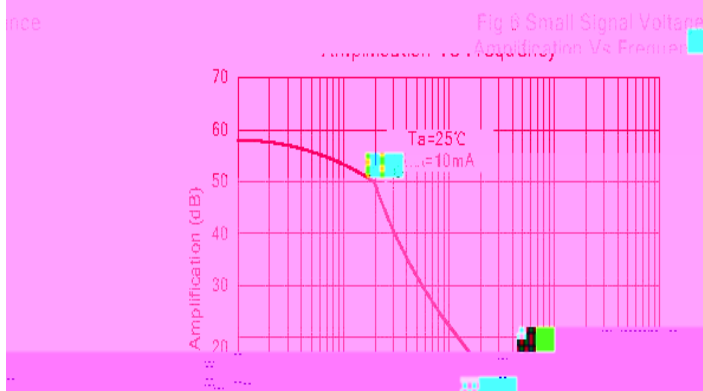


Fig 5 Dynamic Impedance
Vs Frequency

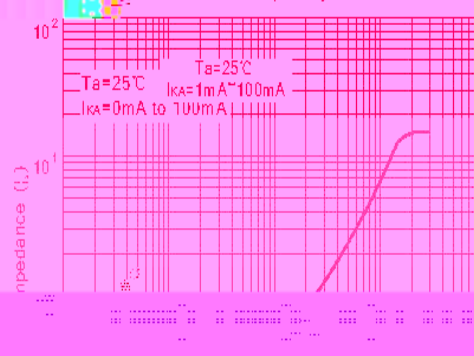


Test circuits&Typical Application

BLOCK DIAGRAM:

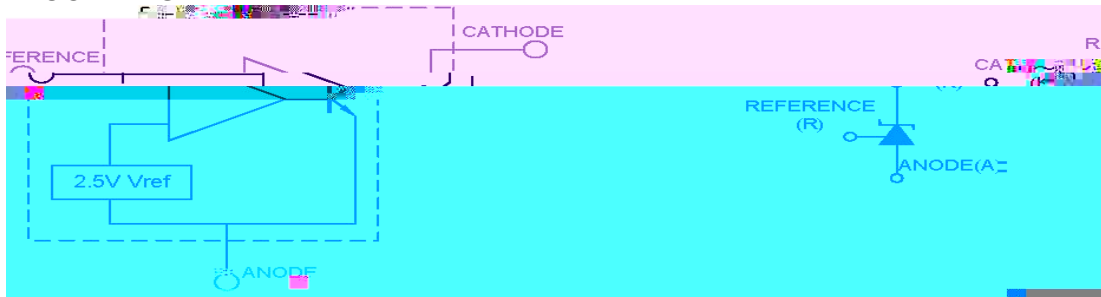

TEST CIRCUITS:

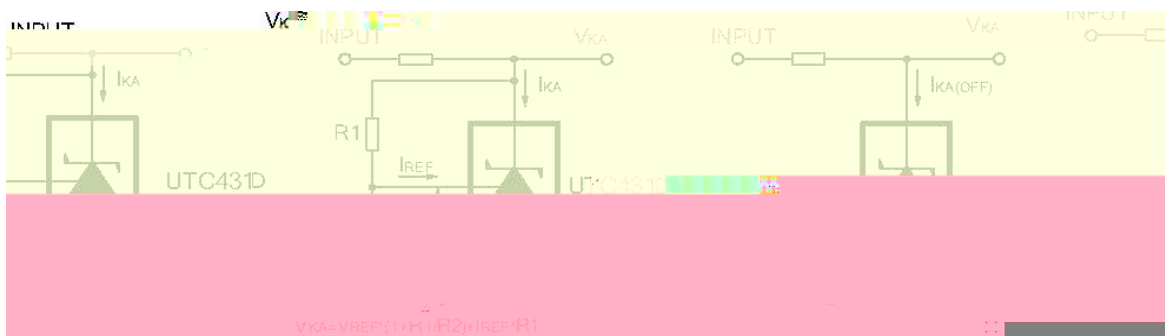



Test Circuit For $V_{KA}=V_{REF}$

Test Circuit for $V_{KA} \cdot V_{REF}$

Test Circuit For $I_{KA}(OFF)$

TYPICAL APPLICATION:

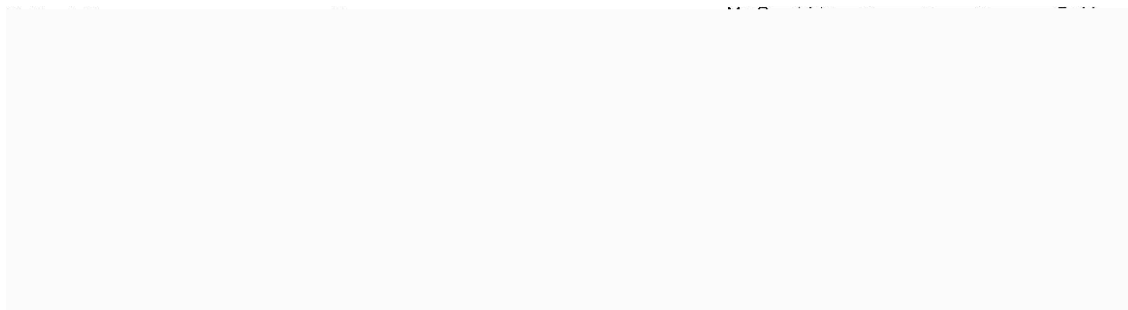

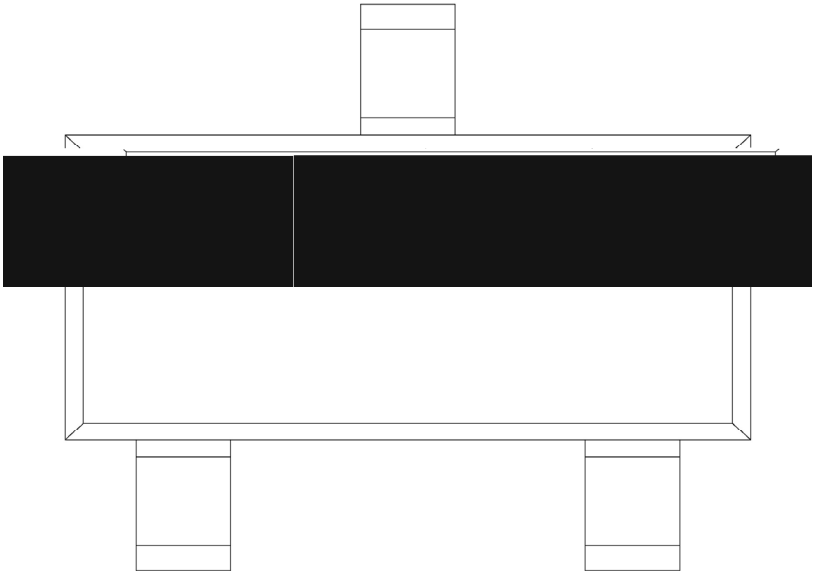

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

^ačy

Note:

- | | |
|--|---|
| 1o• Ä ½ “† 150 ½200 - k ž • 60 ½120sec; | 1.Preheating:150~200 - , Time:60~120sec. |
| 2o• Q > “† 255 r5 - k ž • 4 Ò 5 r0.5sec; | 2.Peak Temp.:255 r5 - , Duration:5 r0.5sec. |
| 3o•D N ò i Ò 0 ,† 2 ½10 - /sec. | 3. Cooling Speed: 2~10 - /sec. |

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

“†y 260 r5 - ž •y 10 r1 sec. Temp.:260±5 Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û !H	Dimension ;>û p . (unit Åmm³)
-------------------------	--------------	-------------------------------