


Rev. C Oct.-2018

TO-220 PNP Silicon PNP transistor in a TO-220 Plastic Package.

45-50W BR2SD718AR
For 45-50W audio frequency amplifier output stage, Complementary to BR2SD718AR.

Designed for use in audio frequency amplifier.




PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	O	Y
h_{FE} Range	60 120	100 200

Rev. C Oct.-2018


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V
Collector to Emitter Voltage	V_{CEO}	-120	V
Emitter to Base Voltage	V_{EBO}	-5.0	V

Rev. C Oct.-2018

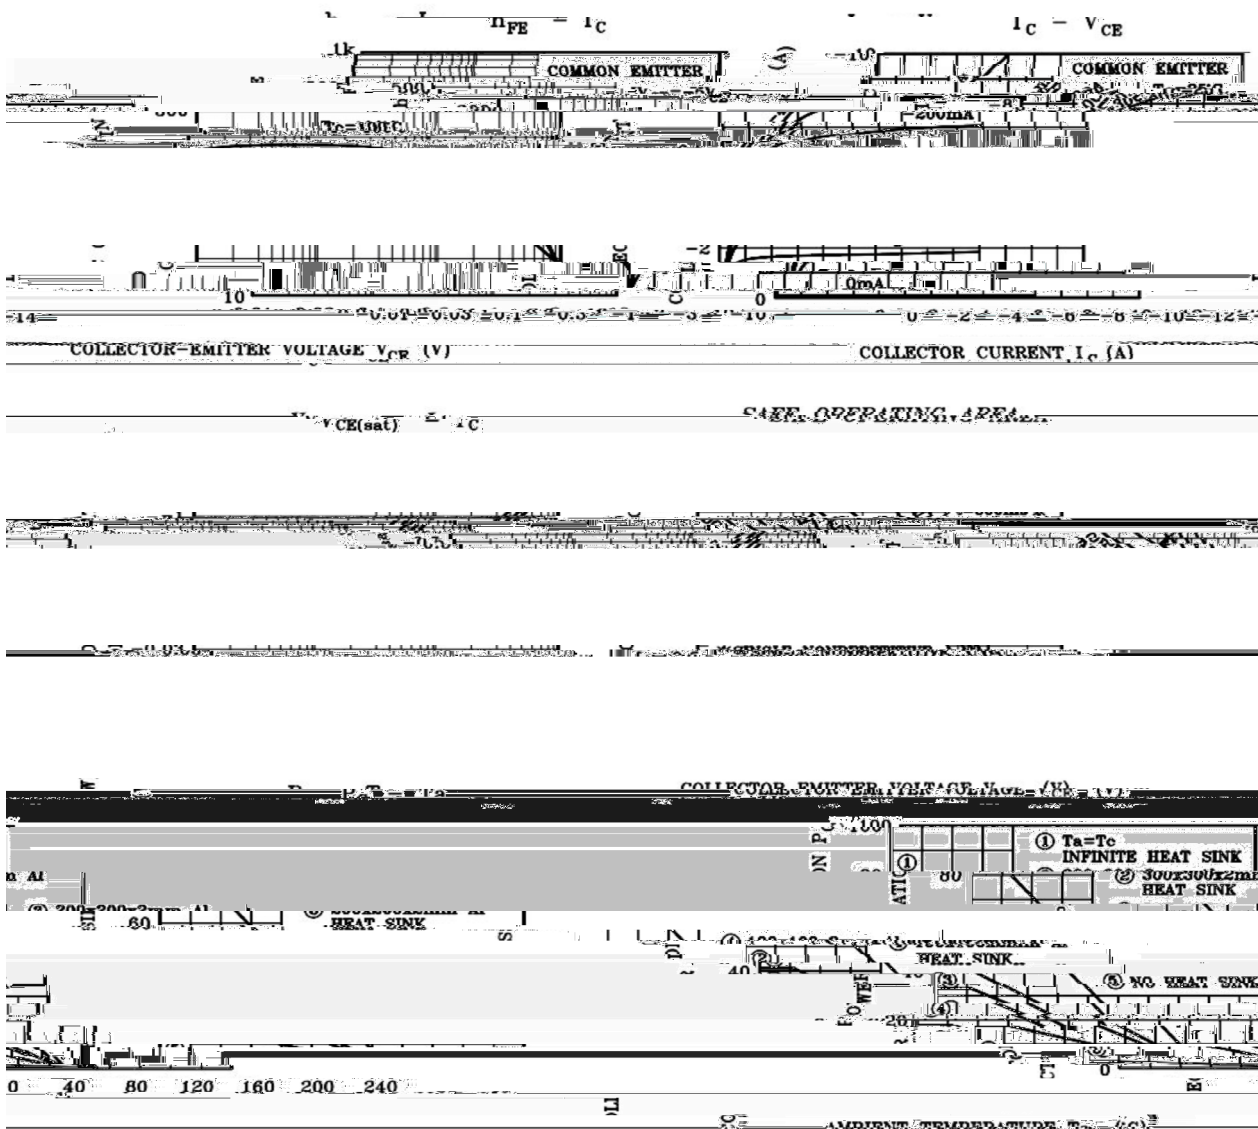

Rev. C Oct.-2018



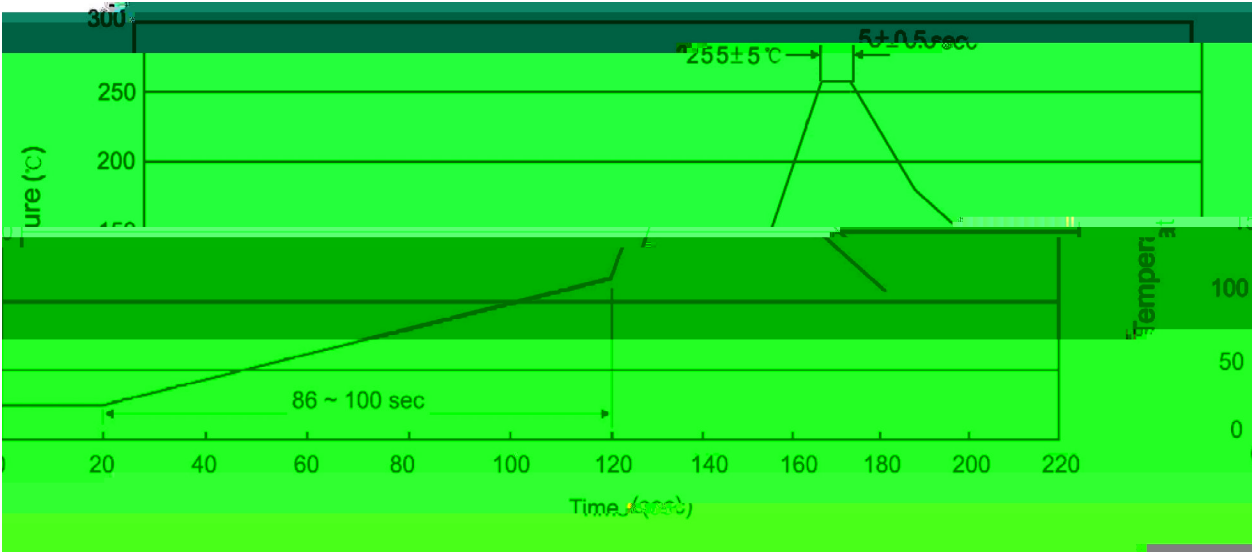

Note:
1.Preheating:25~150 , Time:60~90sec.

- 1251506090sec;
- 2255