


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-2.0	A
Collector Power Dissipation	P_C	900	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}		

2SA1020


/ Package Dimensions

TO-92LM

Unit: mm

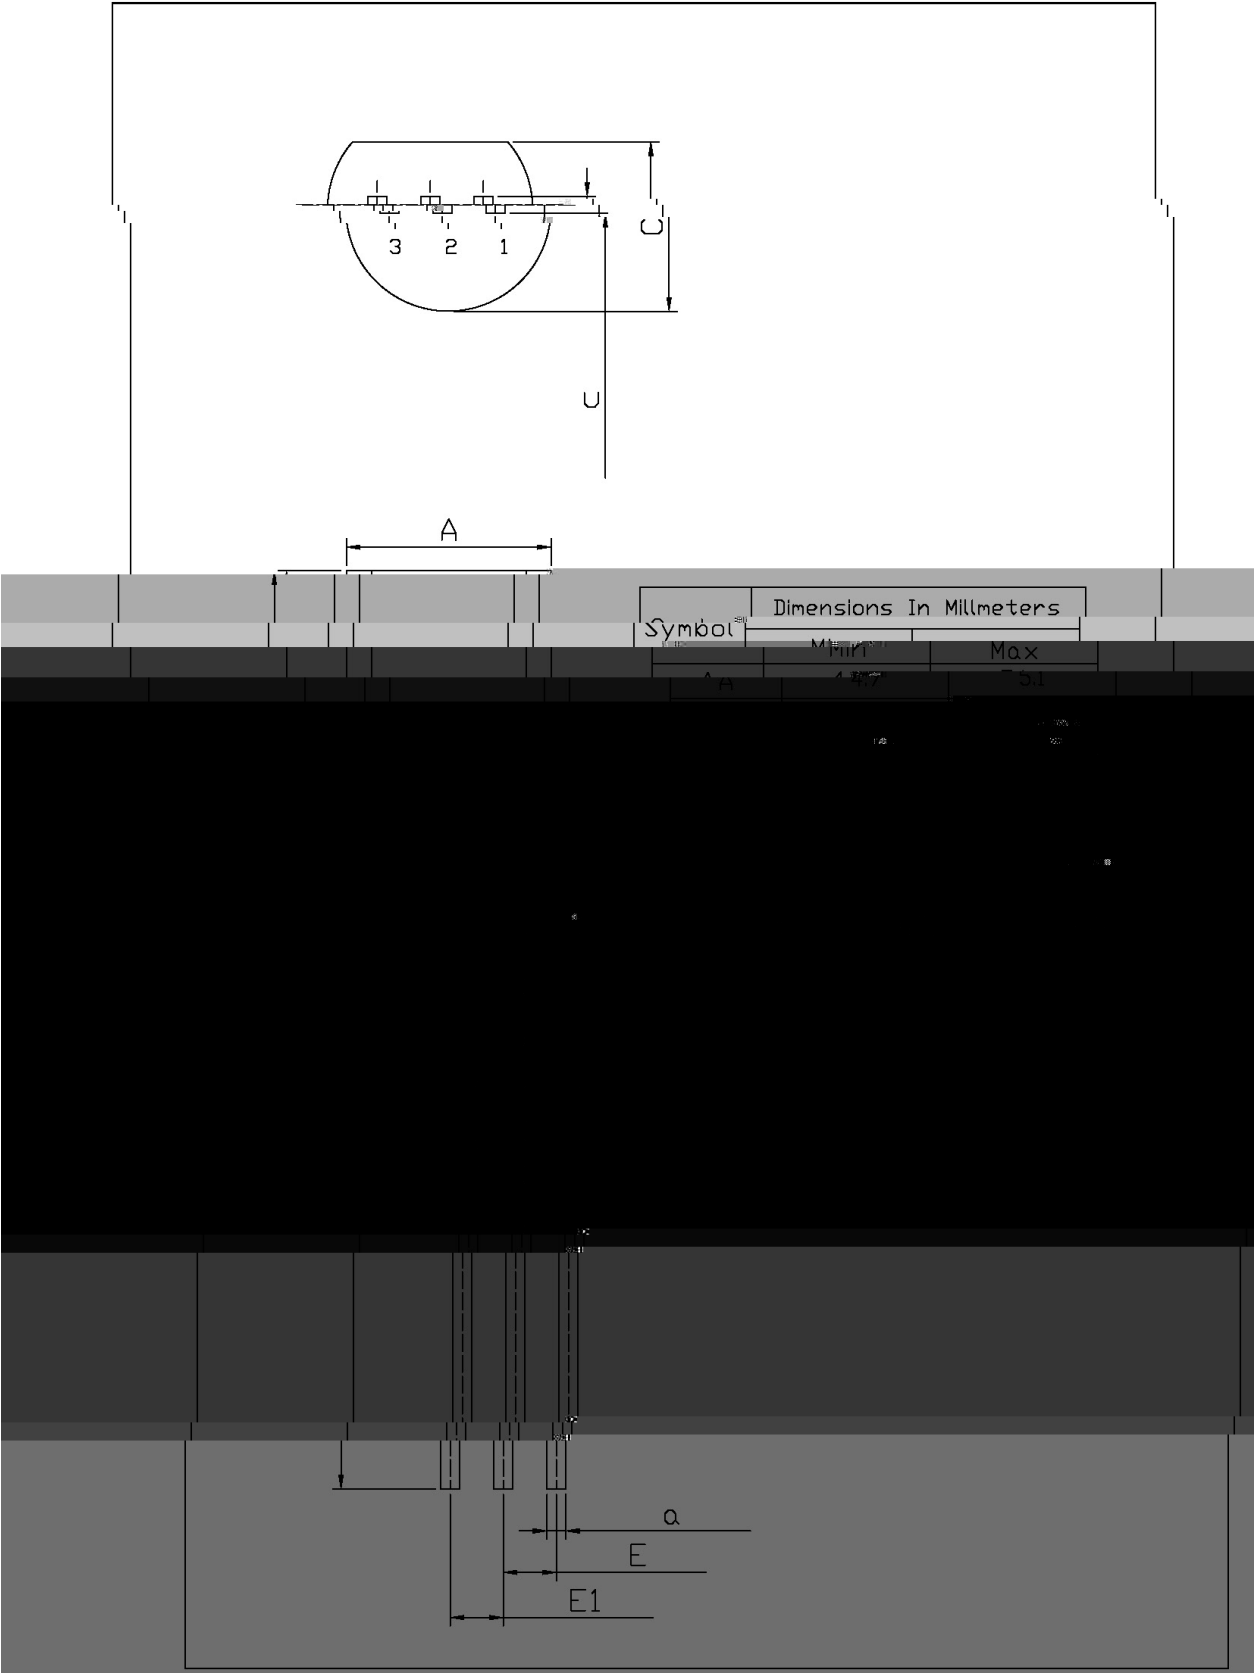

/ Marking Instructions

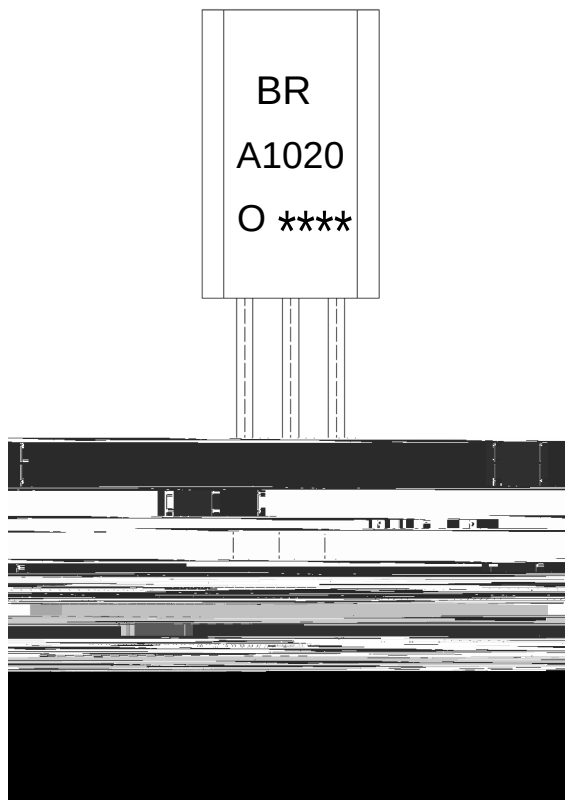

BR:

A1020

O: h_{FE}

Note:


BR: Company Code.

A1020: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

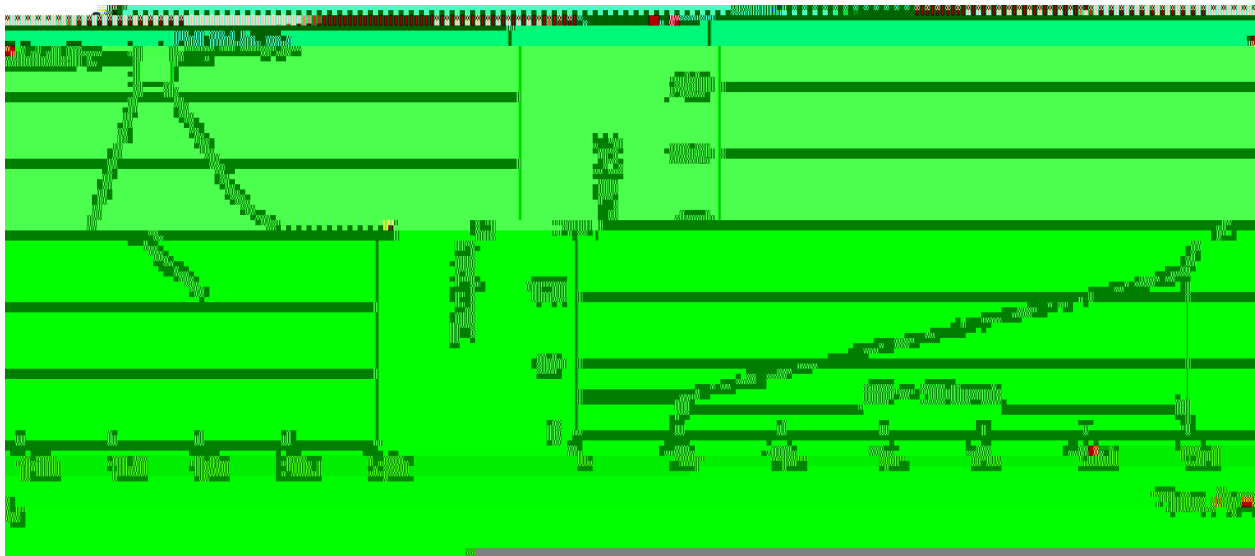

Note:
1.Preheating:25~150 , Time:60~90sec.

1	25	150	60	90sec;
2	255±5		5±	