/ Absolute Maximum Ratings(Ta=25)

v Ϋ	ϟ N	Ϋ Ө	D Ң

/ Electrical Characteristics(Ta=25)

v Ϋ	ϟ N	˩ ˥ ˧ ˩	ώ ή Ө	Ɛ ȝ Ө	ώ ² Ө	D Ң
						μ
						μ

/ Electrical Characteristic Curve

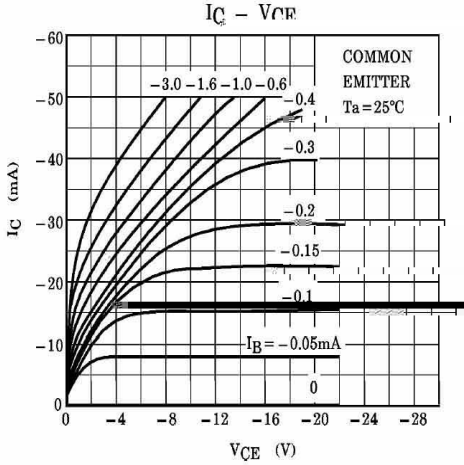

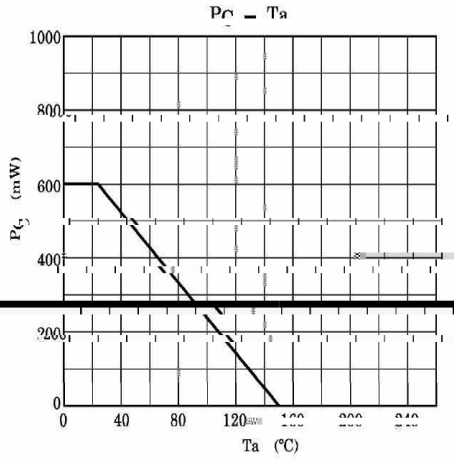

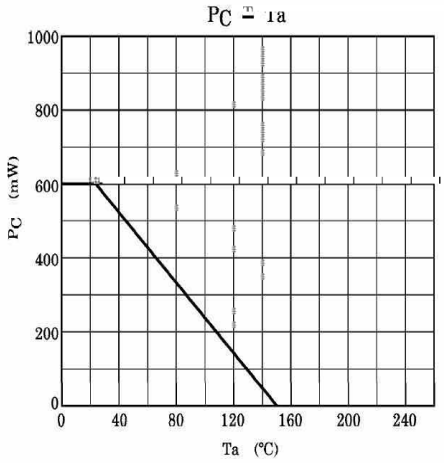

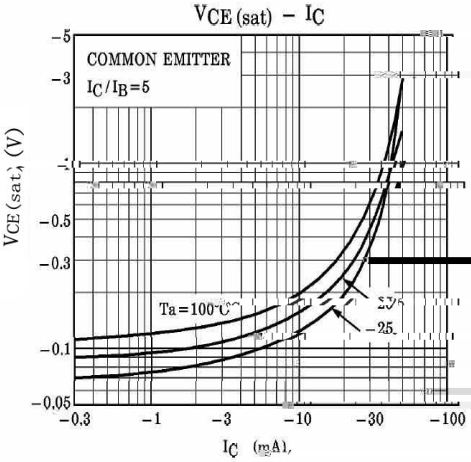

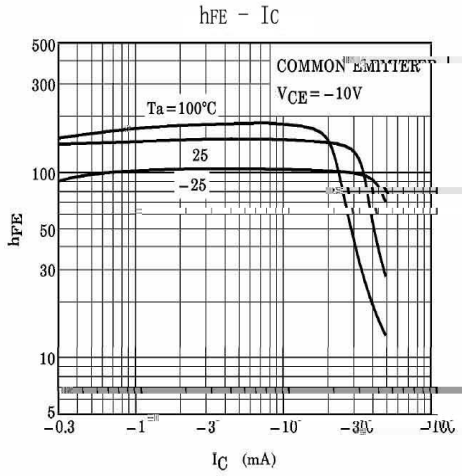

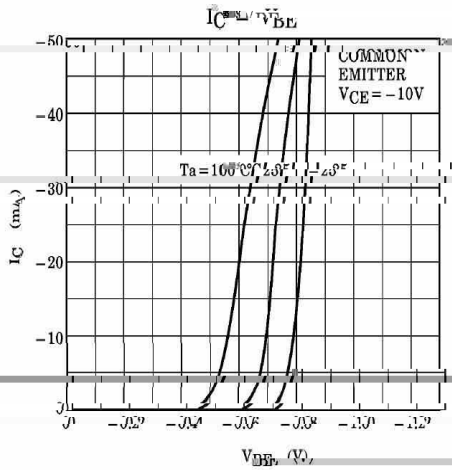

2SA1320

/ Marking Instructions

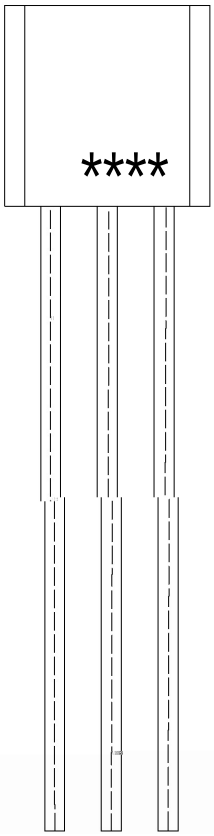

ب ˝ χ

EU=

D4653 χ

---- χ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

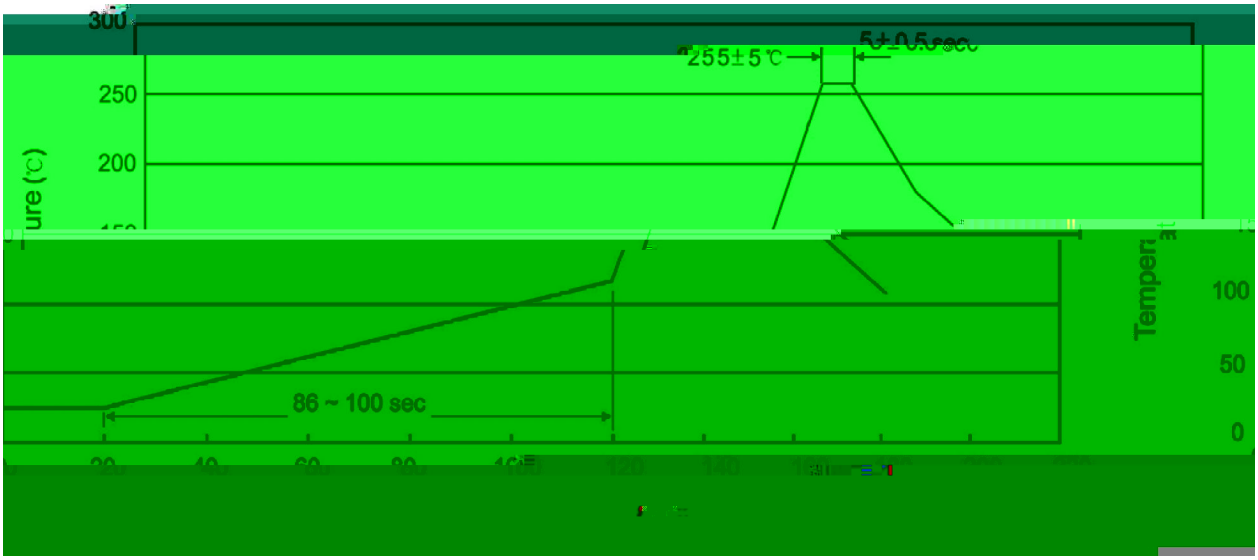

ب ˝ χ

Ĺ ♬ □ ỷ Ќ ɬ ı ˋH ژ Ќ ɬ

Š Ө □ ỷ ° ɬ ı ˋH ژ ˋY ﾊ ㎞ ° ° ɬ °

ì ˙ ﾘ ˛ ɔ ଌ ỷ ㎞ Ќ ɬ ɬ

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ ° ɬ ˋH ژ χ °

/ Packaging SPEC.

ˇΩ ţ ﾘ Ł