Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-180	V
Collector to Emitter Voltage	V_{CEO}	-160	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current - Continuous	I_C	-1.5	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation	P_C(Tc=25)	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max

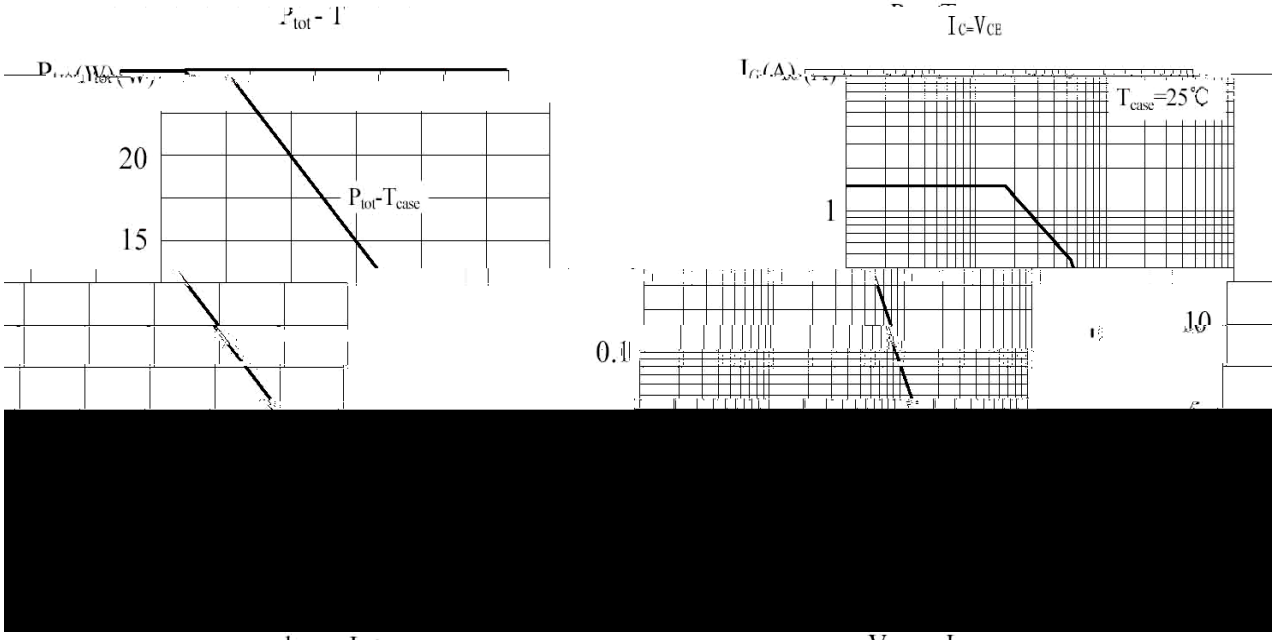
20
15
P_{tot}-T_{case}
I_C=V_{CE}
T_{case}=25℃
1
0.1
10

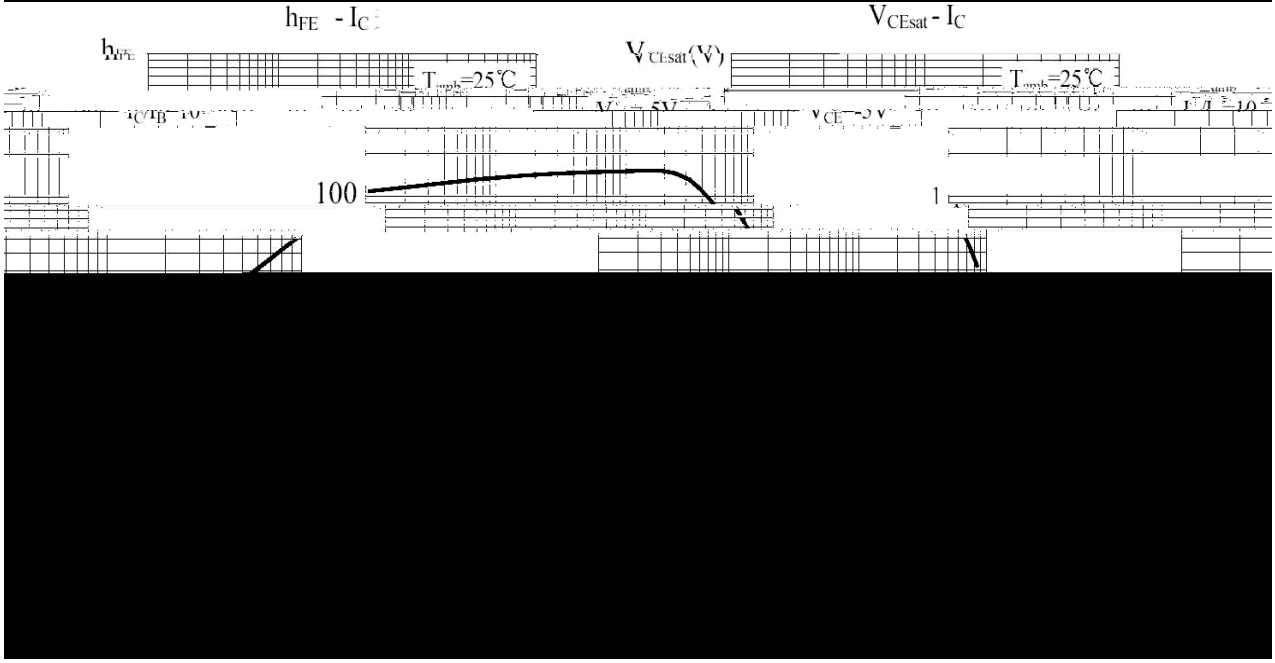
h_{FE} - I_C
T_{amb}=25℃
100
V_{CEsat} - I_C
T_{amb}=25℃
1

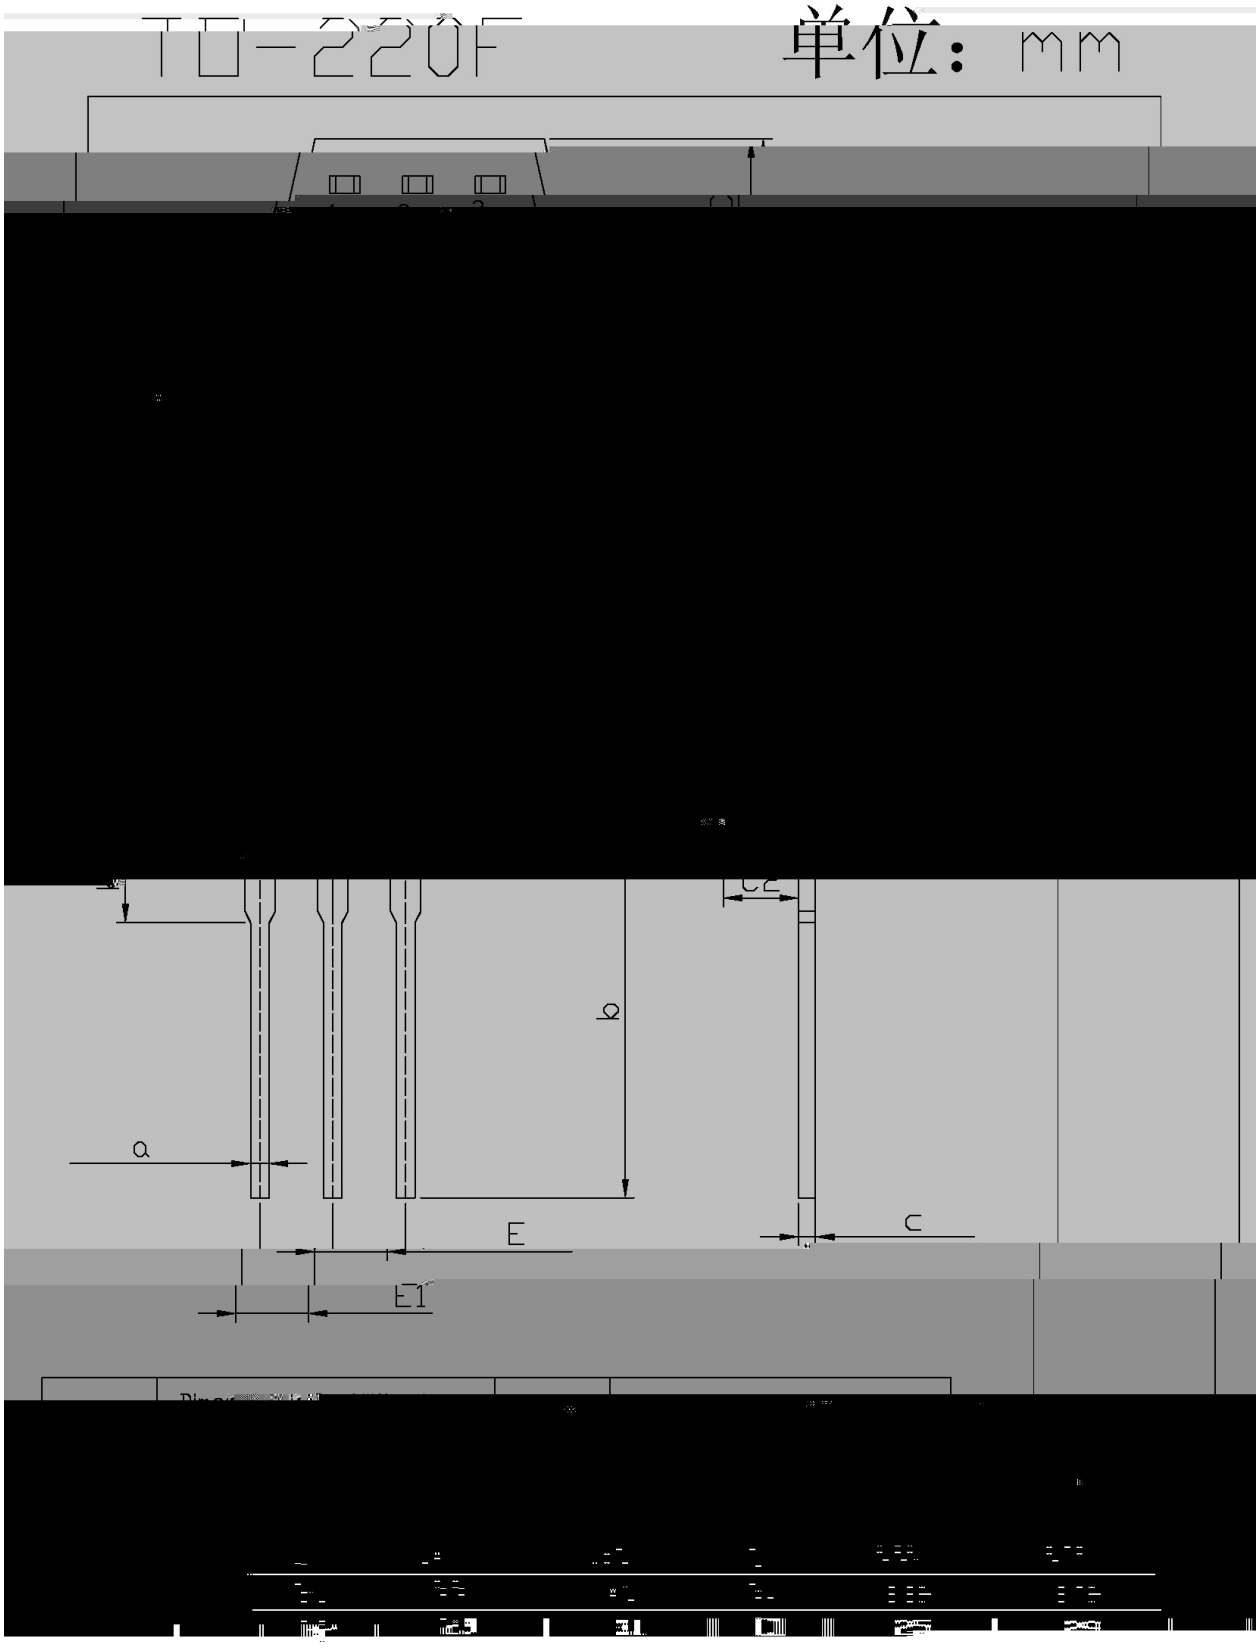
TO-220F
单位：mm
a
E
E1
c

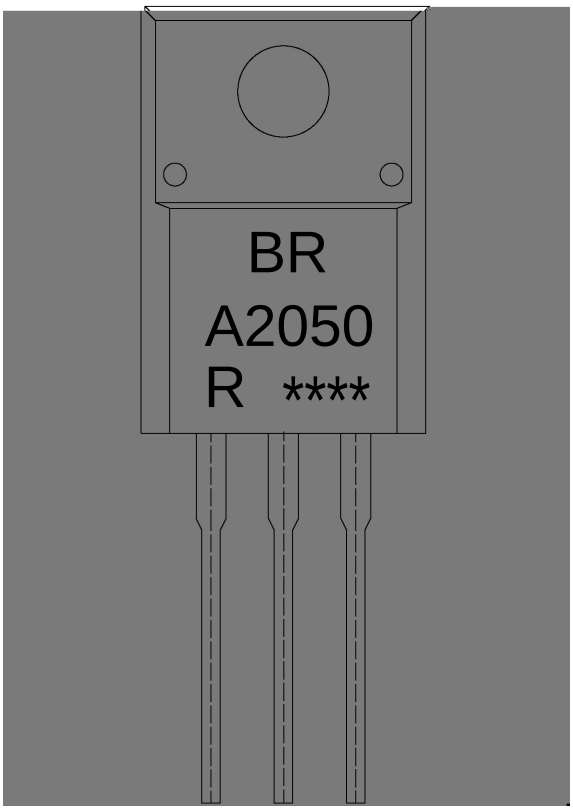

BR

A2050

R: h_{FE}

****

Note:

BR:	Company Code.
A2050:	Product Type.
R:	h_{FE} Classifications Symbol
****:	Lot No. Code, code change with Lot No.

		Note:
1	25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5 5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱