

/ Descriptions

VRW056 ММ Ё SQS æ Ñ ç s ll 1


/ Features

М Ё я æ l ç ð я Ñ Ñ/ñ 5VG4: ;5N Ñ ´

/ Applications

æ ñ ñ ñ ñ A l ´ ñ ñ

/ Equivalent Circuit



/ Pinning




X X X

/ hFE Classifications & Marking


|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |

| Ƶ Ƨ | Ƨ N | Ƨ Ƨ | D Ƨ |
|-----|-----|-----|-----|
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |
|     |     |     |     |
|     |     |     | †   |
|     |     | Ƨ   | †   |


# Electrical Characteristic Curve

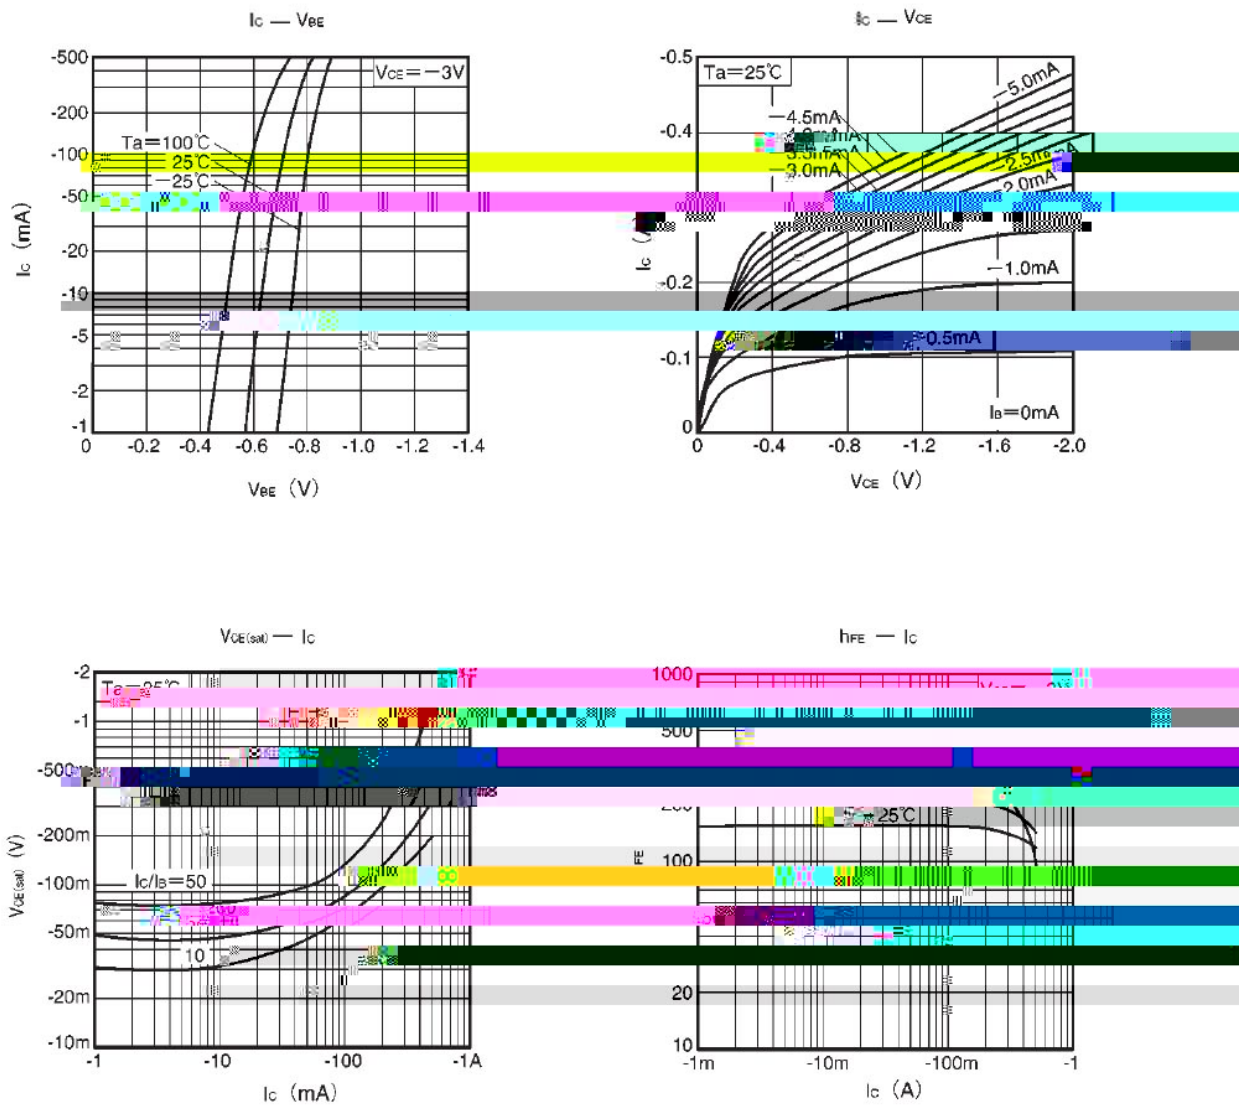

/ Package Dimensions

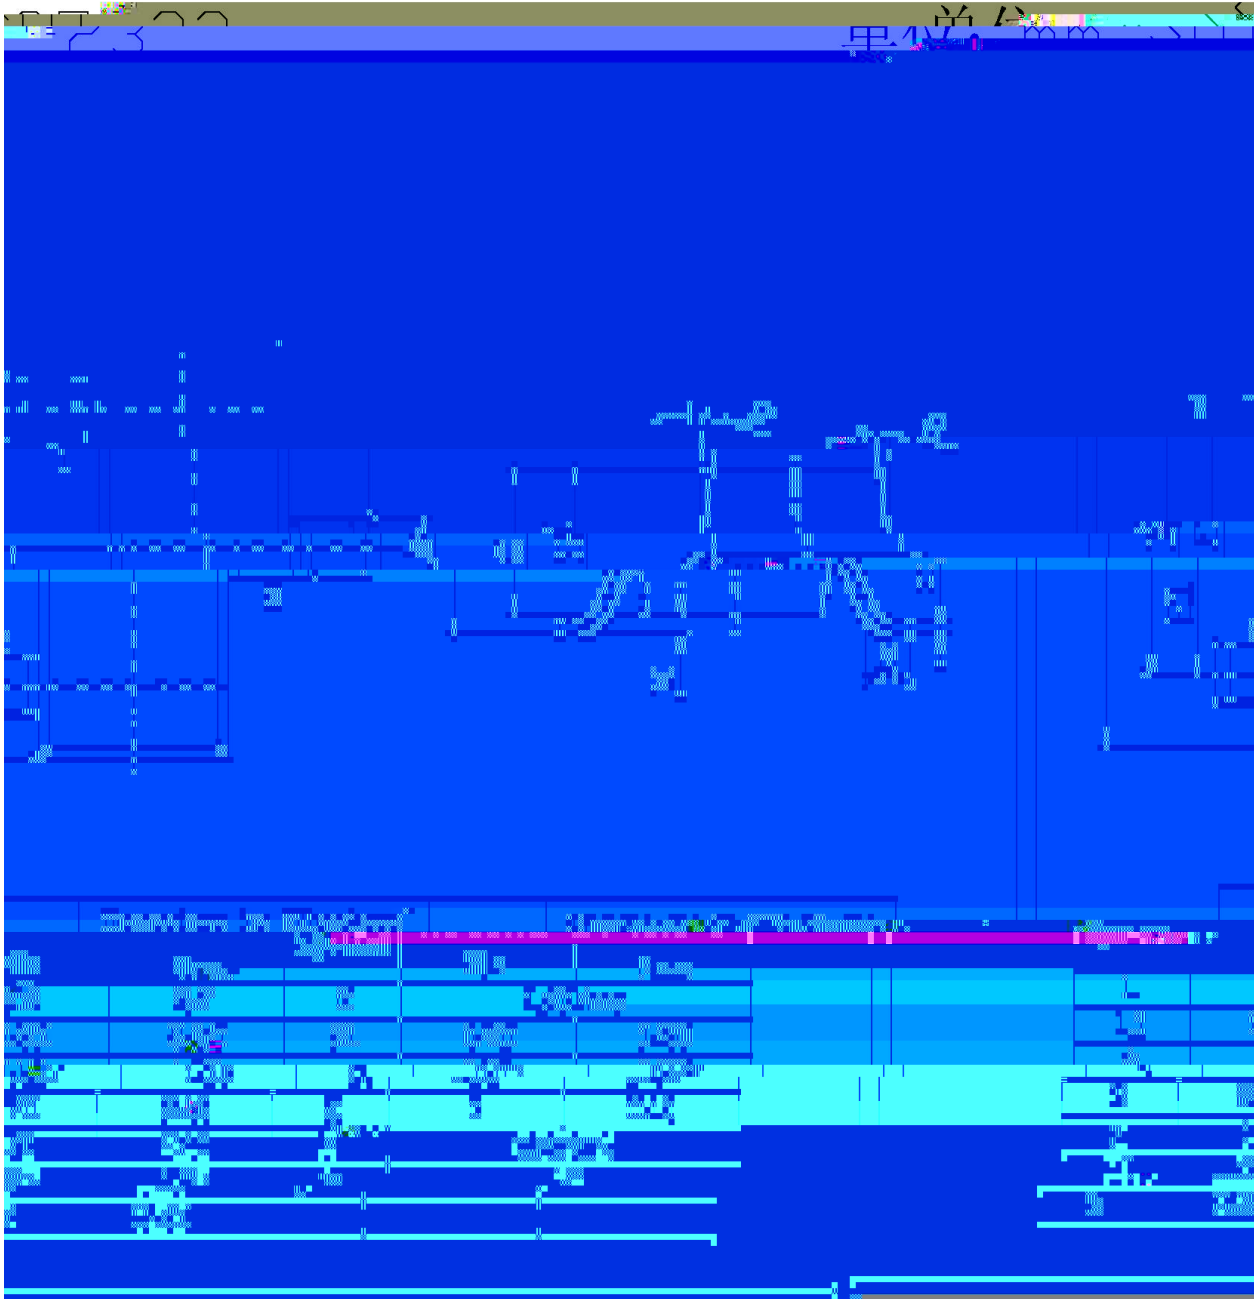


/ Marking Instructions

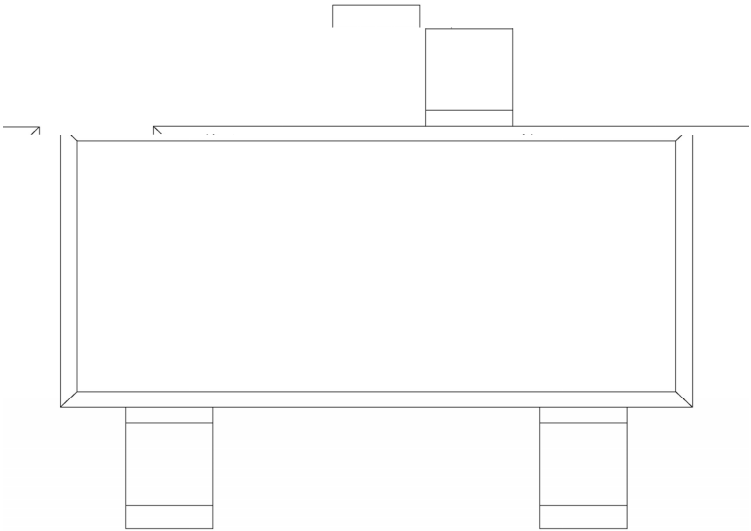

б " X  
K X      № 3 " П  
DN X    № 3 " П  
U X      № ' 6 П

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

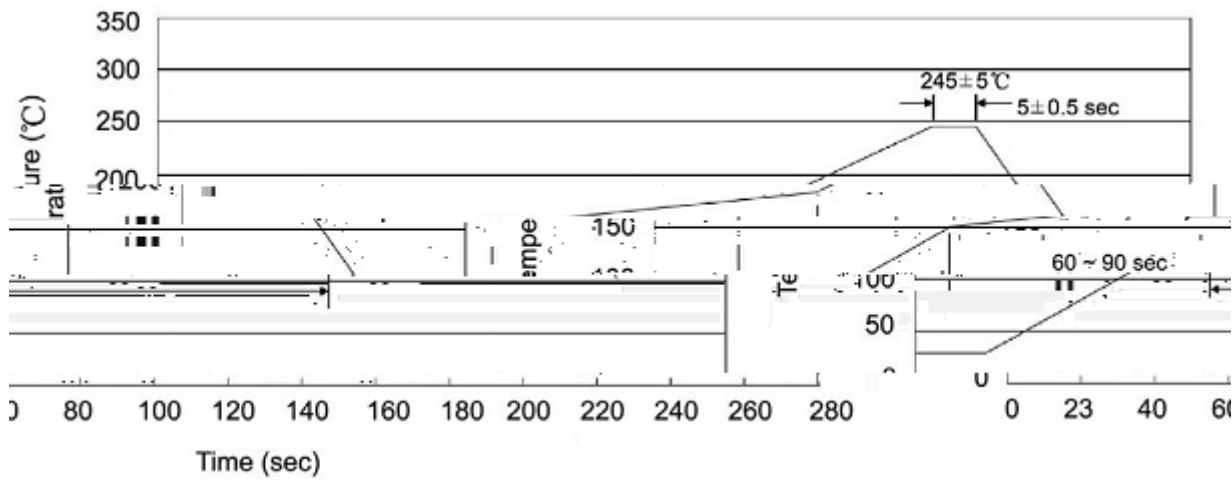

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

5. 温度曲线

6. 温度曲线

7. 温度曲线

8. 温度曲线

9. 温度曲线

10. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

5. 温度曲线

6. 温度曲线

7. 温度曲线

8. 温度曲线

9. 温度曲线

10. 温度曲线

/ Packaging SPEC.

|        | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel    | Inner Box   | Outer Box   |
|--------|------------|-----------------|-----------------|-----------------------|-----------------|---------|-------------|-------------|
| SOT-23 | 3,000      | 10              | 30,000          | 6                     | 180,000         | 7 ρ × 8 | 180×120×180 | 390×385×205 |

/ Notices