2SC2230(A)

DATA SHEET

/ Descriptions

WR0<50P ṂṂ ᒷ QSQ æṀ ɥ s ǁ ˥

/ Features

Y_{FHR} ᢃ/ˊ ╙ ꭢ ╙ ɰ ˋ ᢃ

/ Applications

ᡮ̂̂̂ ˮ ڽ ܟ ᴙ ῲ ᠼ /Ẽ ꭢ Ꞵ ֽ ڑ

/ Equivalent Circuit



/ Pinning

X X X

/ h_{FE} Classifications & Marking

V Ώ̣	ˠ N		Ώ̣Ӫ	D Ɉ

/ Electrical Characteristic Curve

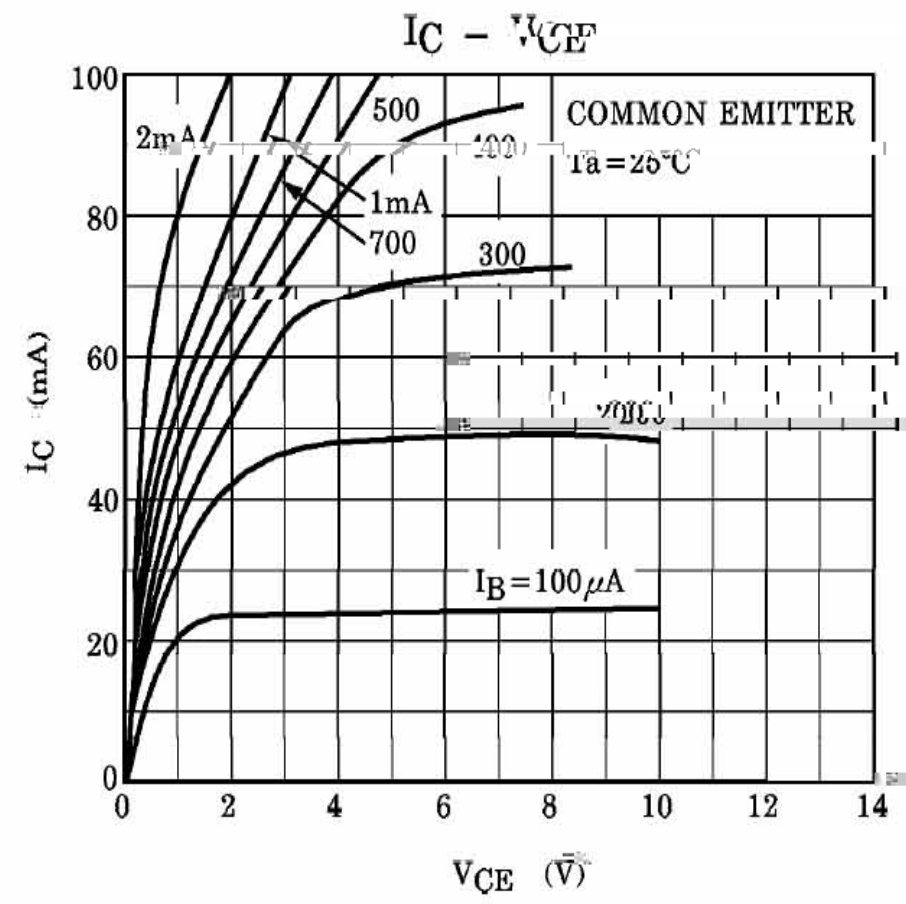

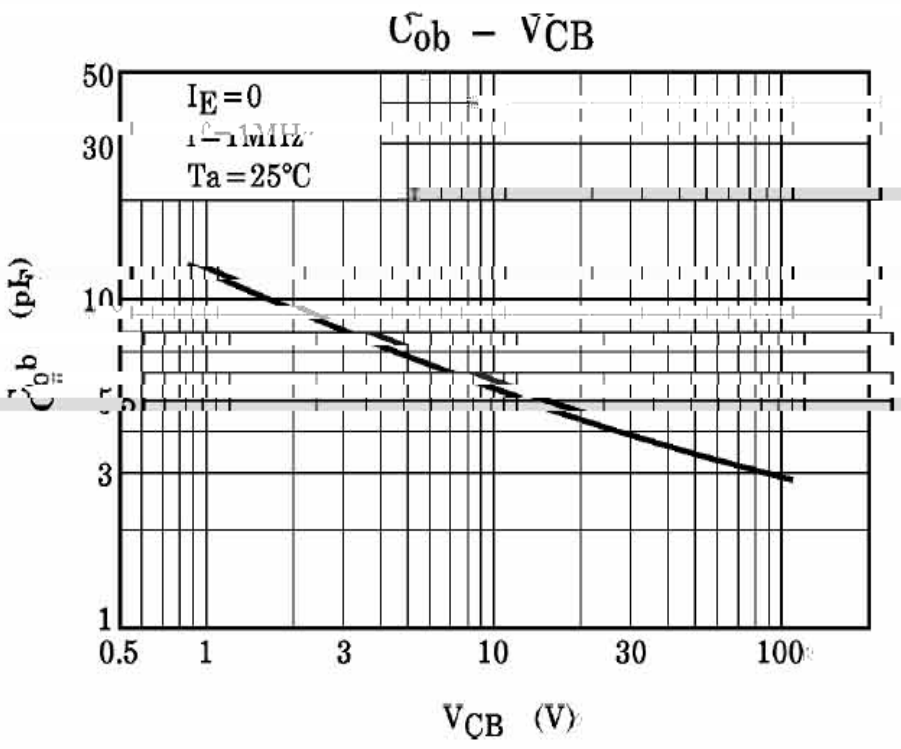

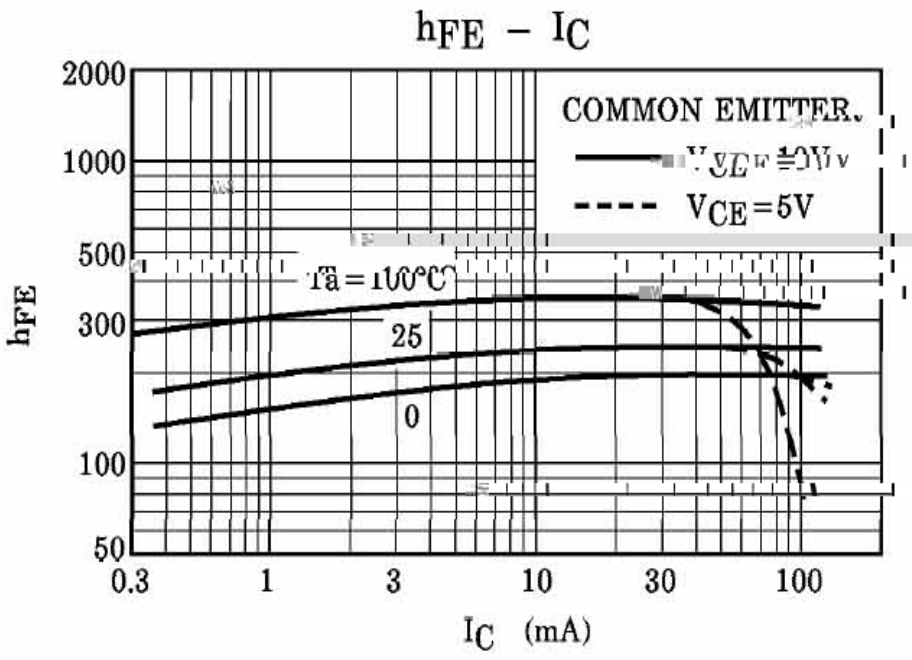

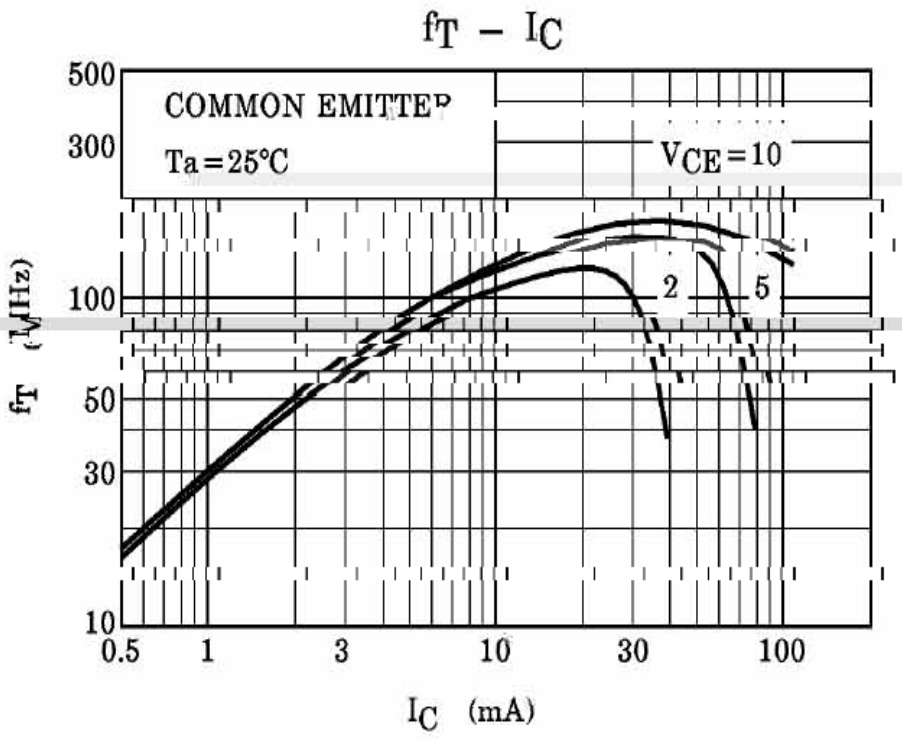

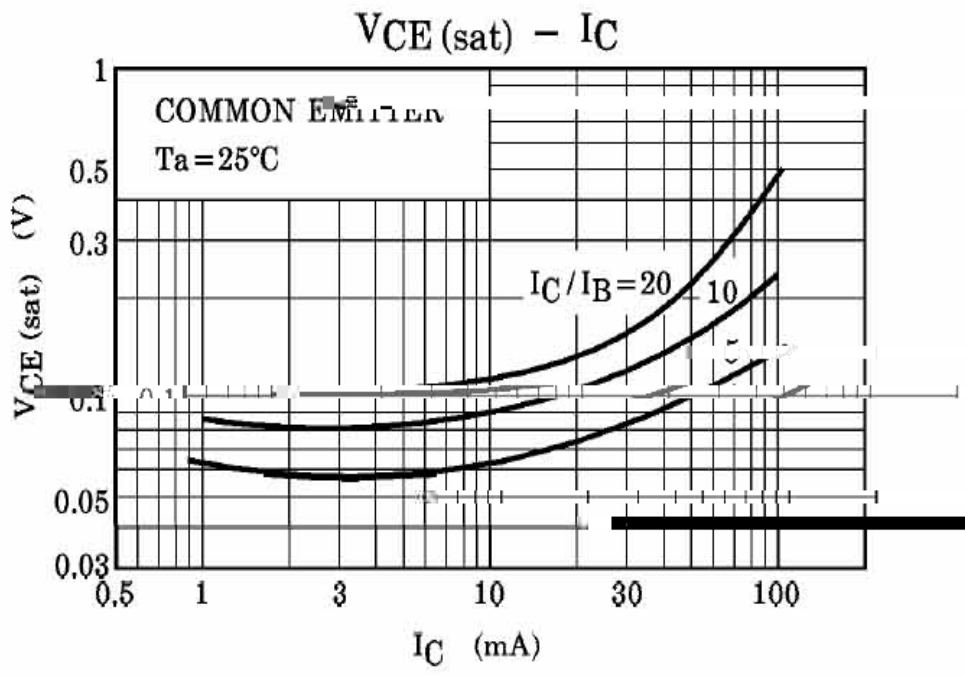

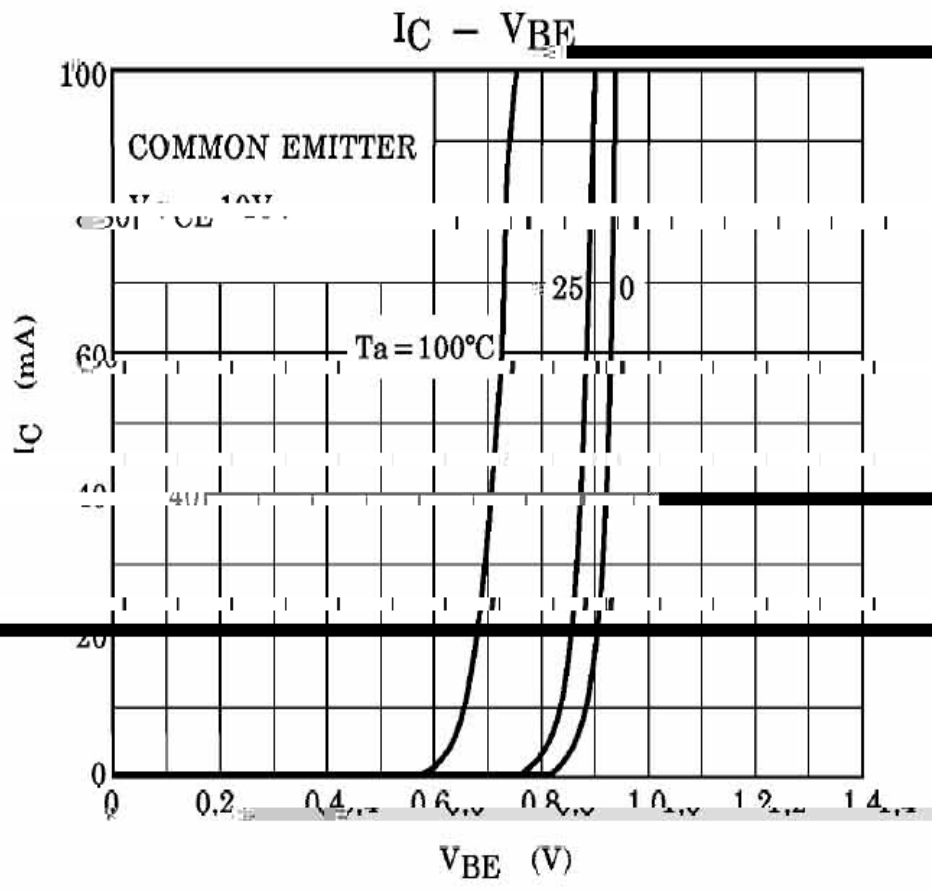

/ Package Dimensions

TO-92LM Unit: mm

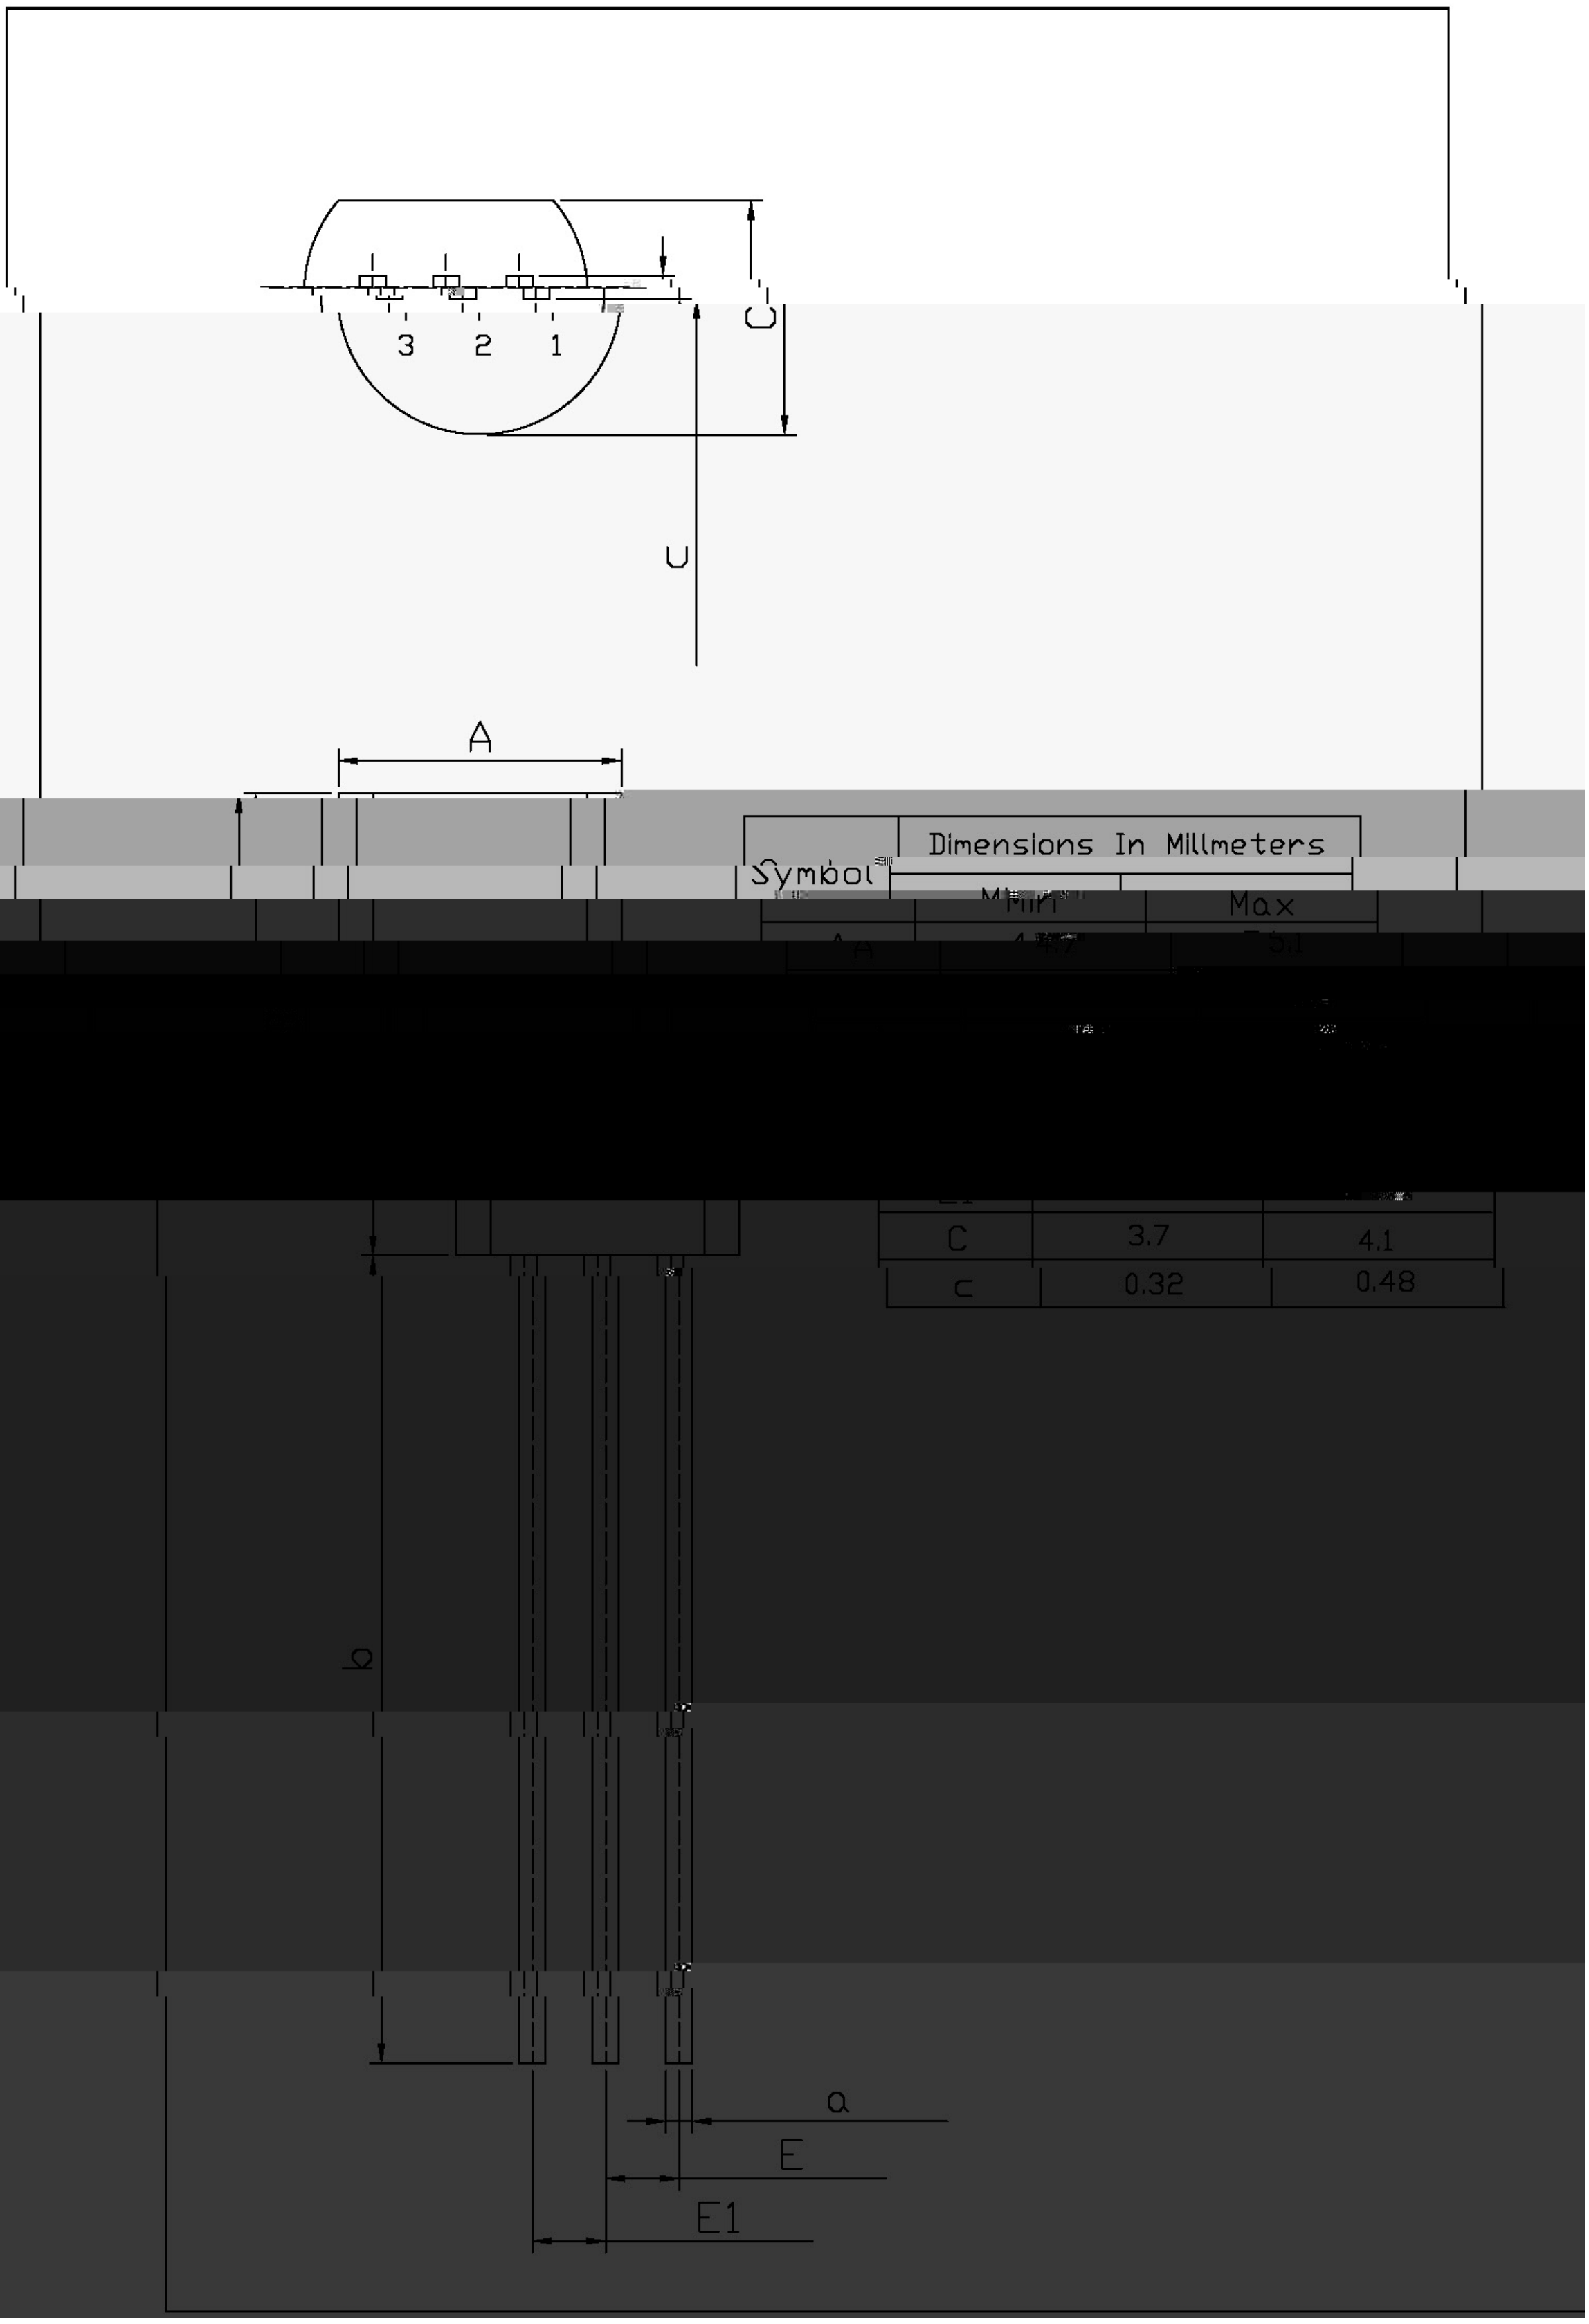

Symbol	Dimensions In Millmeters	
	Min	Max
A	4.7	5.1
[illegible]	[illegible]	[illegible]
E1	[illegible]	[illegible]
C	3.7	4.1
c	0.32	0.48

/ Marking Instructions

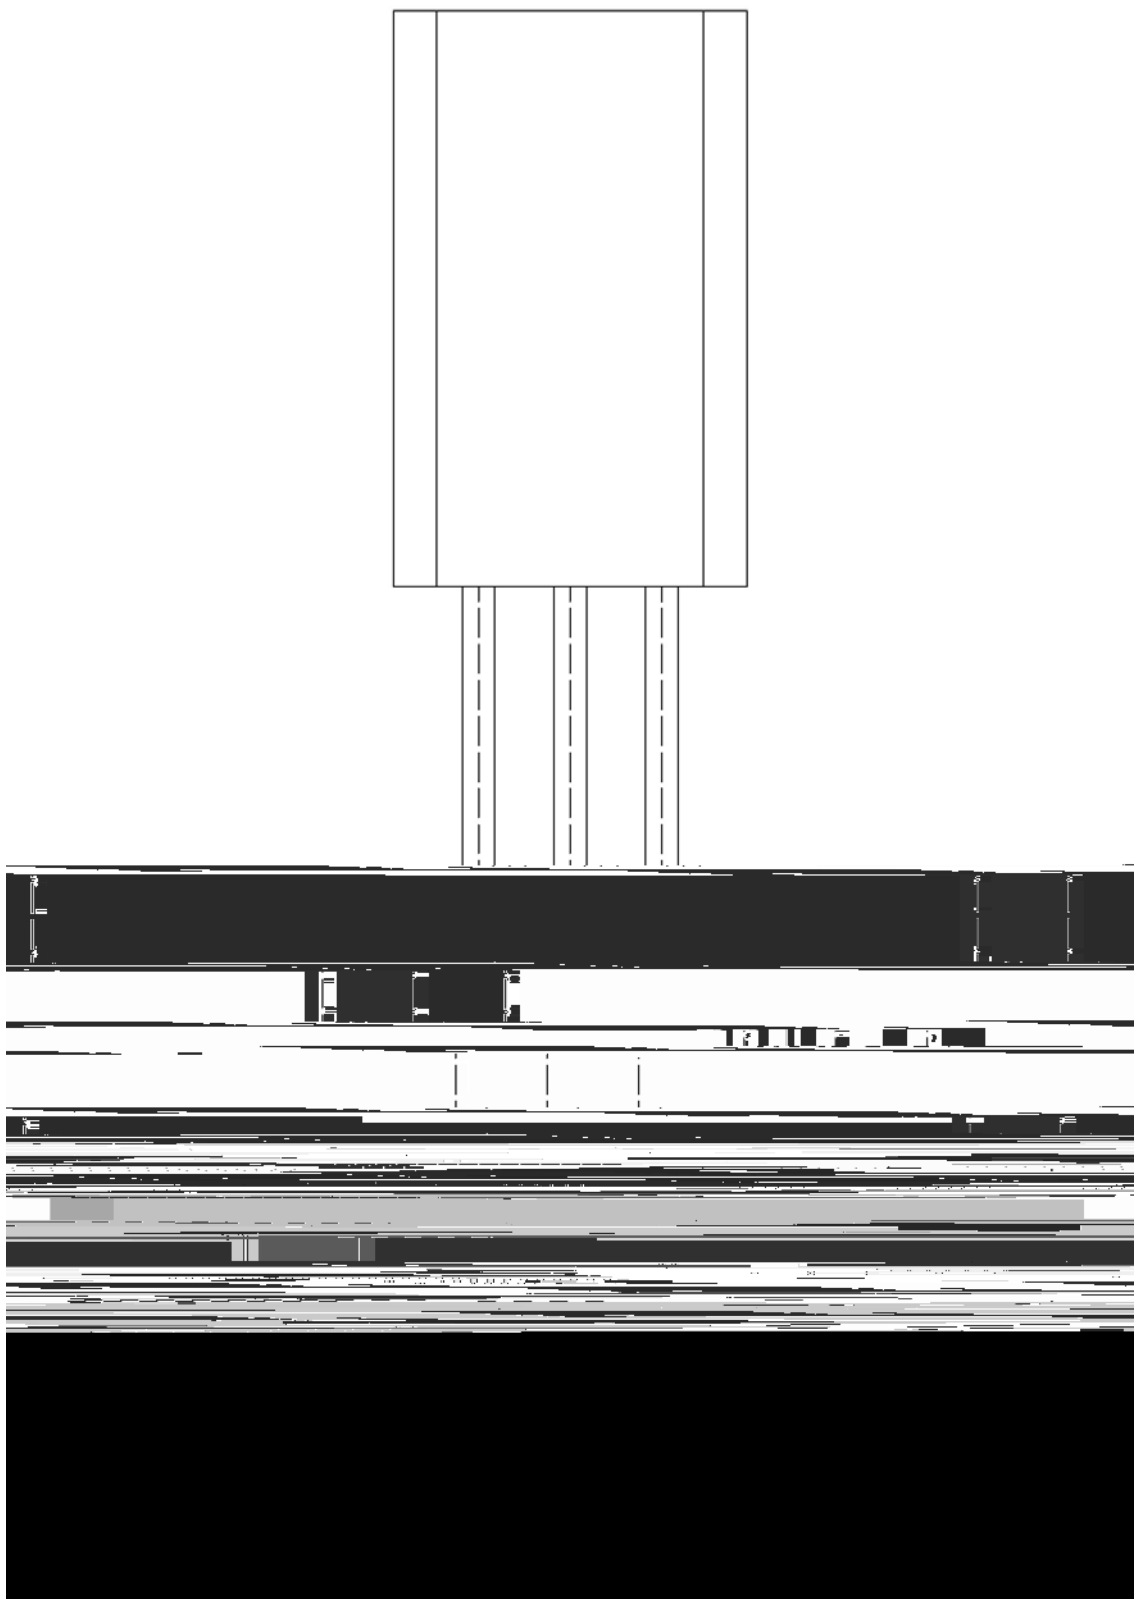

ب ˝ χ

EU꞊ ҥӾ ʢ ᴎ Ϸђ

F5563D χ ҥӾ ʒ ᴺ Ϸђ

\꞊ ҥӾ kɪʜ˂ ⁶ Ϸђ

- - - - χ ҥӾ ·l ғ ῆ ᴺ Ϸђ ι ҩ ·l ғ ῆ ᴺ ψ ק

(　　) / Temperature Profile for Dip Soldering(Pb-Free)

ب ˝ χ

ỉ ♬ □ ŷ Ḱ ɫ ı ̀H ڗ Ḱ ɫ

Š Ö □ ŷ ° ɫ ı ̀H ڗ ̀Y ꟿ ꭗ ° ° ɫ °

ì ˙ Ꮧ ˛ ɔ ه ŷ ꭗ Ḱ ɫ ɫ

/ Resistance to Soldering Heat Test Conditions

□ ŷ χ ° ɫ ̀H ڗ χ °

/ Packaging SPEC.

̈Ω ꞇ ɣ ᒷ

封装形式	包装数量					包装尺寸 :		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

[redacted]