



TO-220 NPN Silicon NPN transistor in a TO-220 Plastic Package.


2SA1011
 Complementary pair with 2SA1011.


100W
 High voltage switching, AF power amplifier, 100W output predriver applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	D	E
h_{FE} Range	60 120	100 200

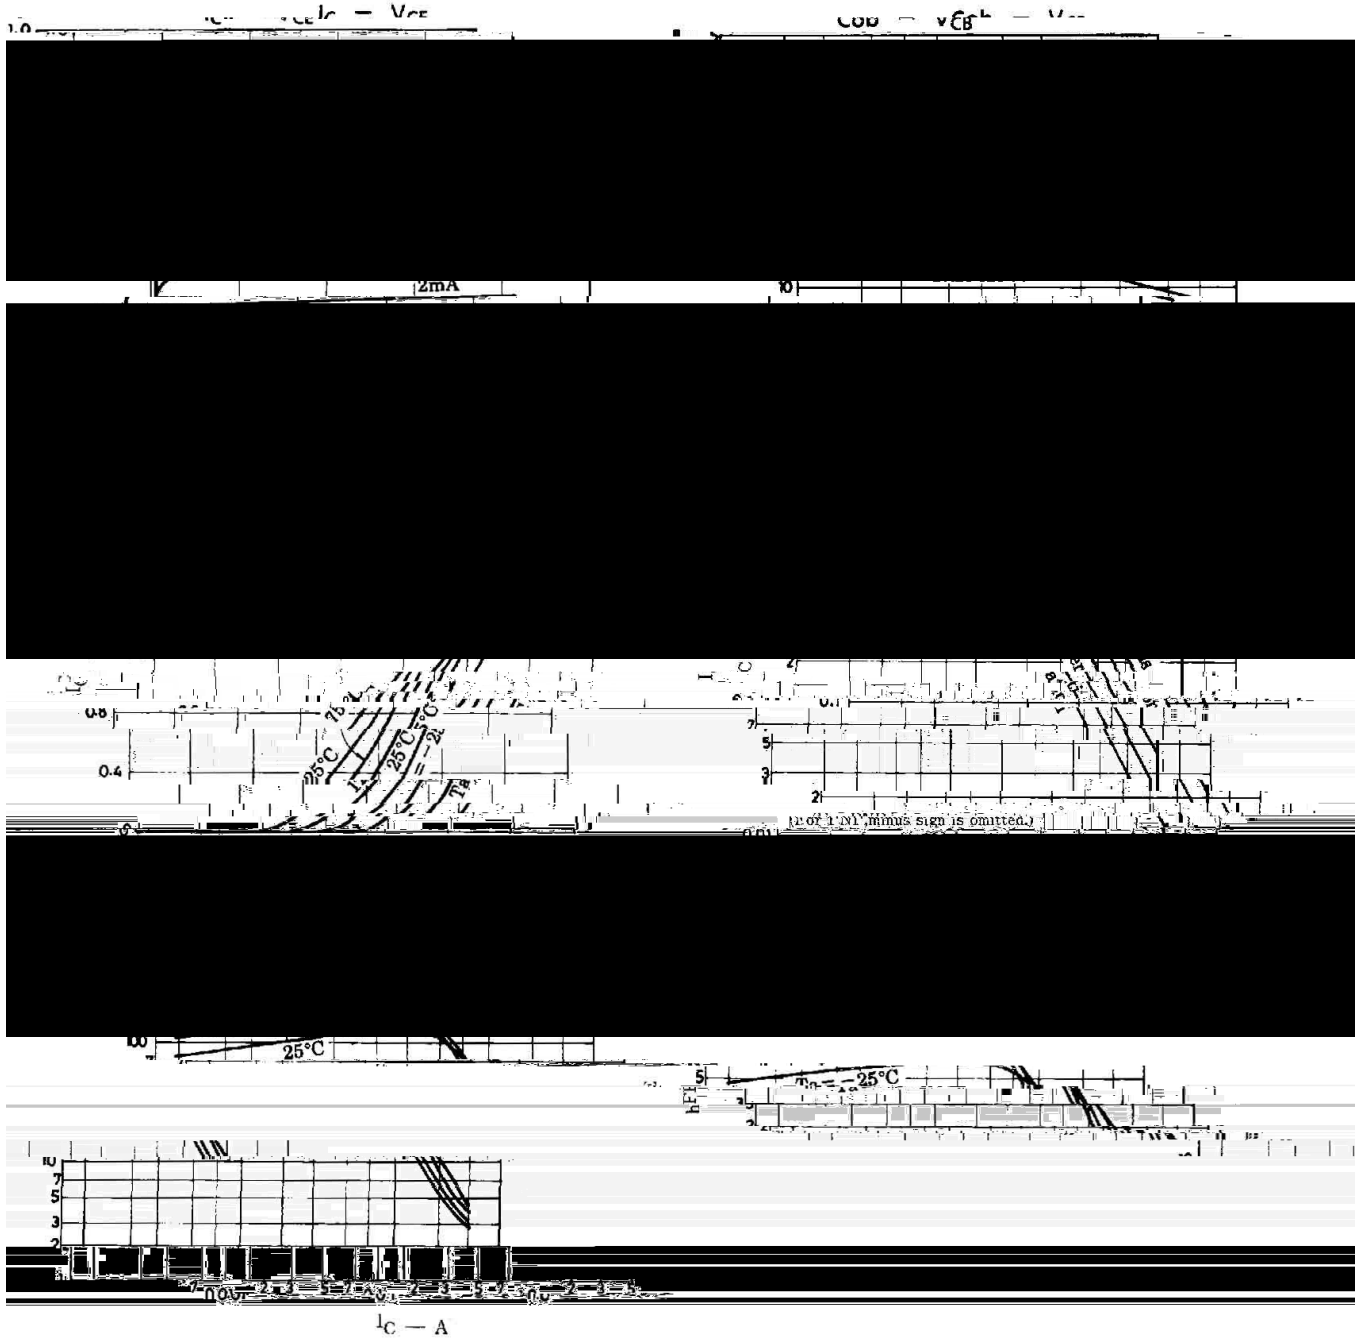

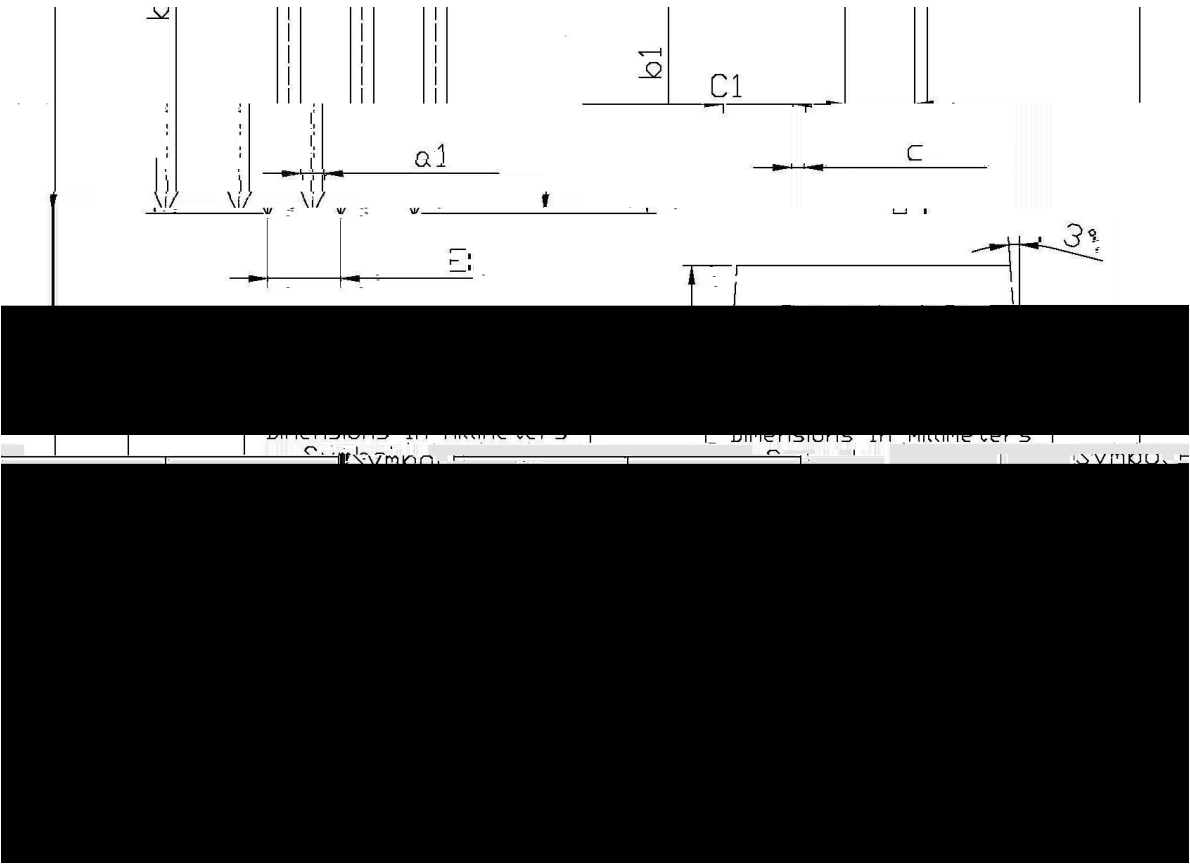

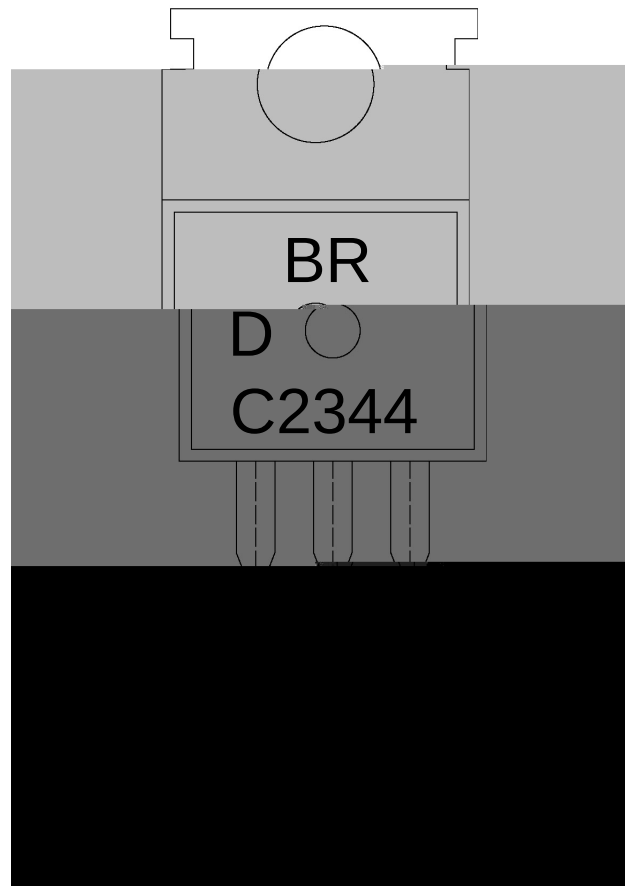

BR

C2344

D: h_{FE}


Note:

BR: Company Code

C2344: Product Type.

D: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

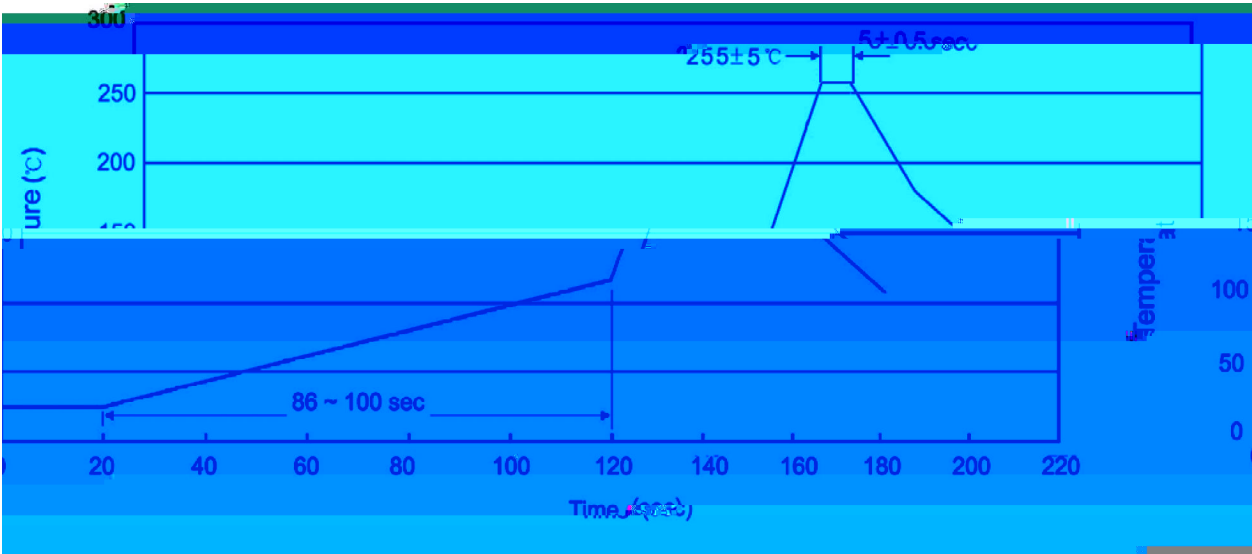

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension			(unit mm ³)

/ TUBE

Package Type	Units					Dimension			(unit mm ³)
--------------	-------	--	--	--	--	-----------	--	--	-------------------------