


TO-92LM NPN Silicon NPN transistor in a TO-92LM Plastic Package.

$h_{FE}=100 \sim 320$
 High DC current gain: $h_{FE}=100 \sim 320$.


Audio frequency power amplifier applications.



PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	O	Y
h_{FE} Range	100 200	160 320

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V

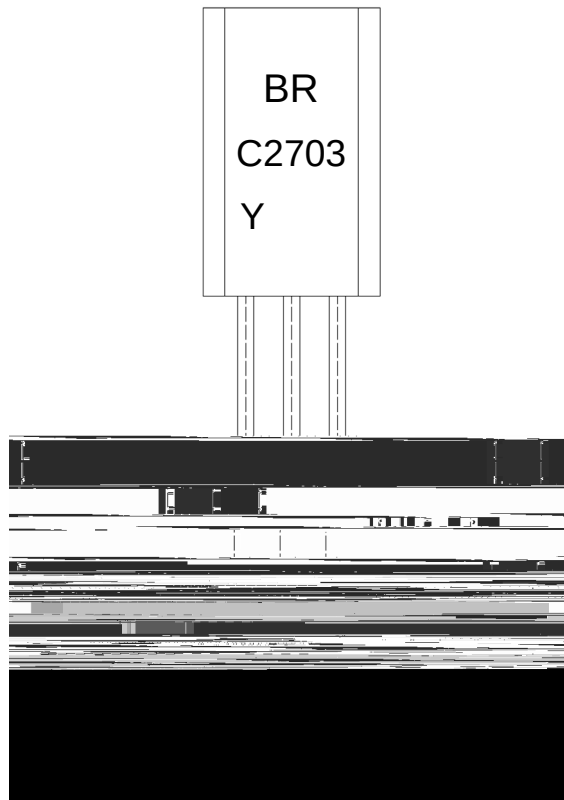

BR:

C2703

Y: h_{FE}

Note:

BR: Company Code.

C2703: Product Type.

Y: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.



		Note:	
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10	/sec.	3. Cooling Speed: 2~10 /sec.

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ BULK

□ ' æ ⅔ Æ ħ