


2SC2717

2SC2717



$$V''\Omega$$
 γ N
$$\ddot{\Omega} \ddot{\Theta} \quad f \quad \rangle$$

/ Electrical Characteristic Curve

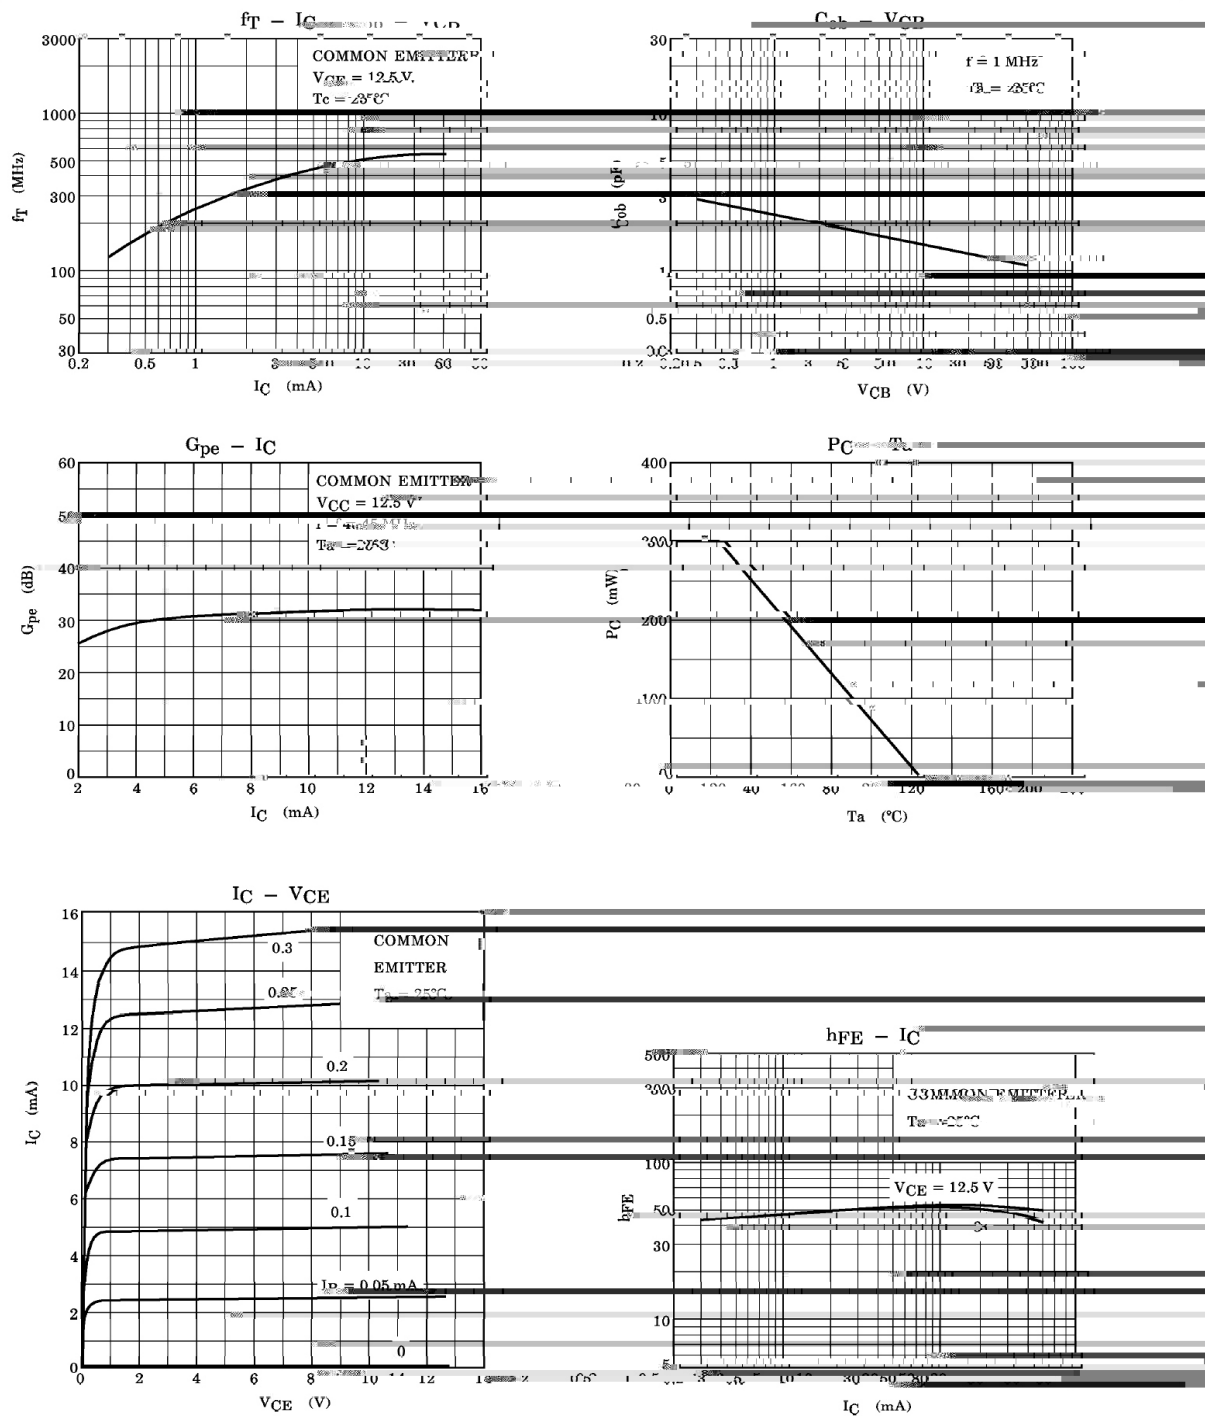


/ Package Dimensions

/ Marking Instructions

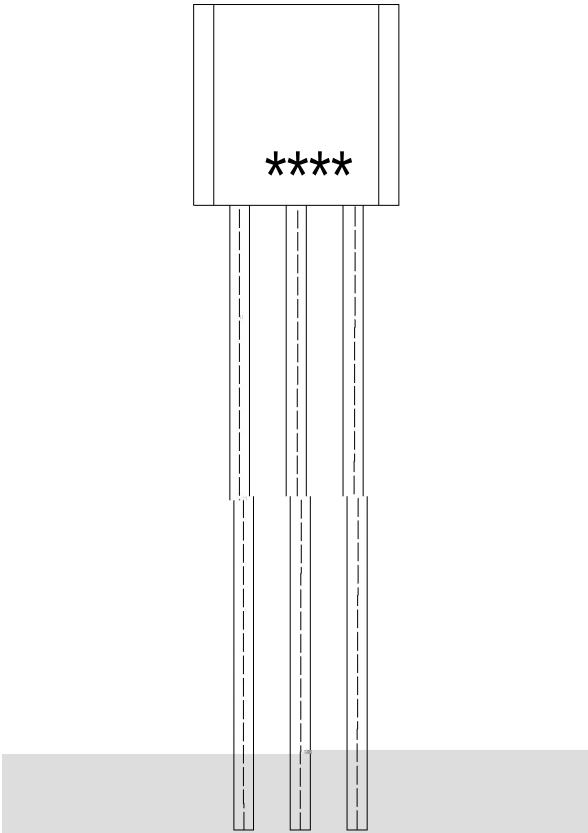

♂ " χ	
EU:	⚡ 3 " Γ
F5:4: χ	⚡ 3 " Γ
---- χ	⚡ 1 f ḡ " Γ 1 ⚡ 1 f ḡ " Ψ ρ

() / Temperature Profile for Dip Soldering(Pb-Free)

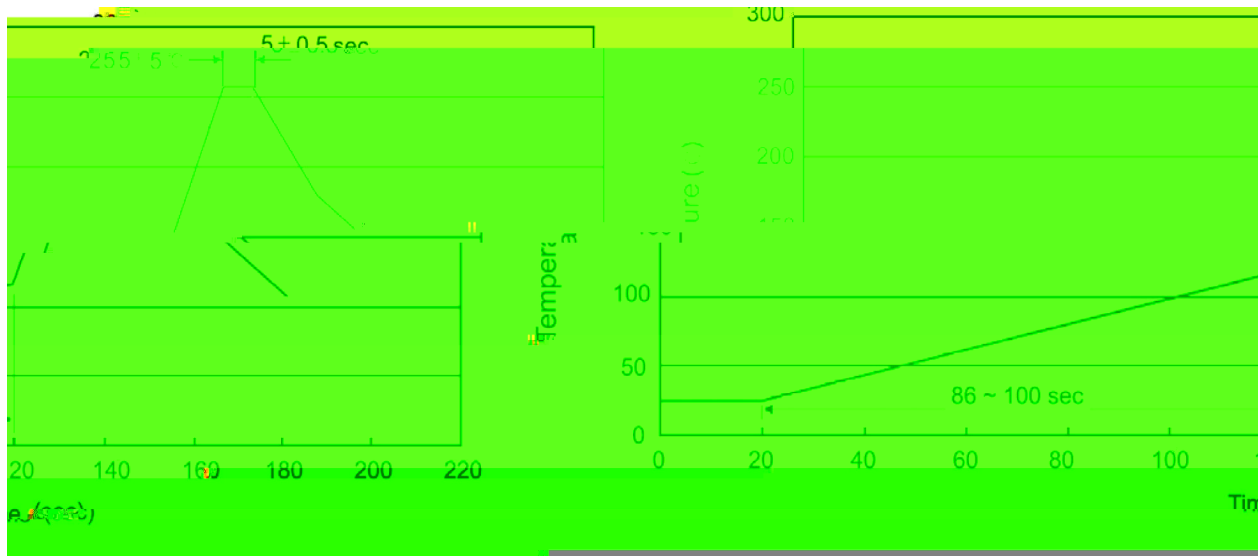

$\bar{c}^{\sim} X$
 $\bar{l} \square \bar{y} \quad \bar{k} \quad \dagger \bar{l} \bar{H} \bar{j} \quad \bar{k} \quad \dagger$
 $\bar{s} \bar{\theta} \square \bar{y} \quad \circ \quad \dagger \bar{l} \bar{H} \bar{j} \bar{Y} \bar{H} \bar{k} \quad \circ \quad \dagger \quad \circ$
 $\bar{i} \quad \bar{y} \quad \bar{c} \bar{y} \bar{k} \quad \bar{k} \quad \dagger \quad \dagger$

/ Resistance to Soldering Heat Test Conditions

$$\square \overset{\circ}{y} \chi \quad \circ \quad \dagger \quad \text{'H} \overset{\circ}{j} \chi \quad \circ$$

/ Packaging SPEC.

“Ω τ γ ε