

2SC2881A


Rev.E Mar.-2016

VRW0;< ММ Ё QSQ æ Ñ ç s ll 1 Silicon NPN transistor in a SOT-89 Plastic Package.

≈ è Ì ' æ í ð я æ /М Ё ñ / ъ 5VD4534D Ы ´







High f_T , high V_{CEO} , small flat package, complementary pair with 2SA1201A.

æ ñ æ ¨ I ' Õ æ




Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V		


Electrical Characteristic Curve

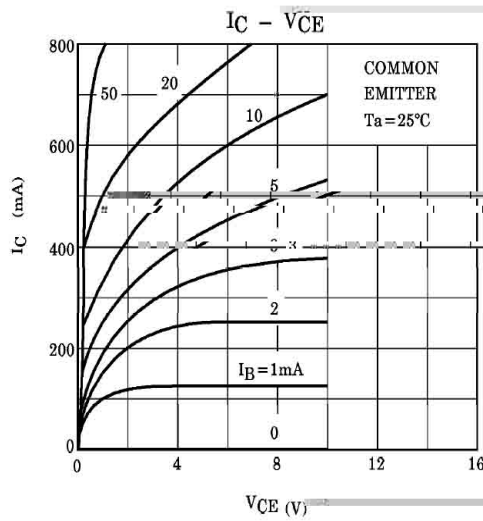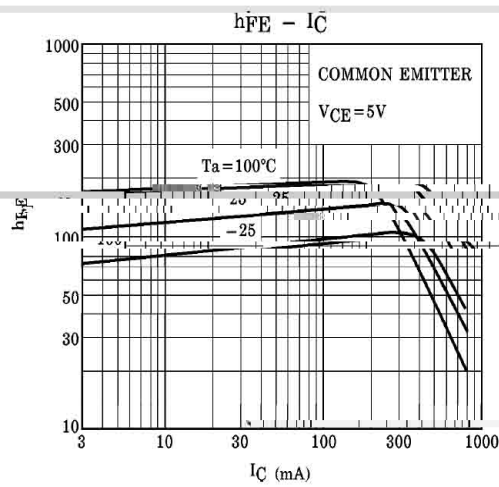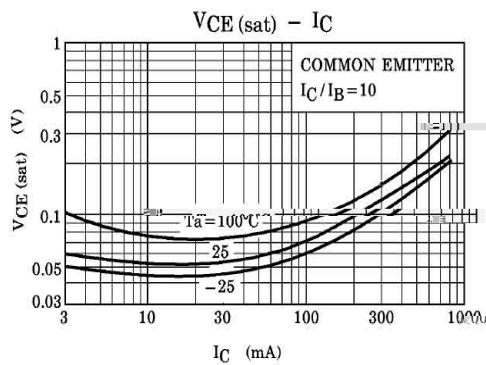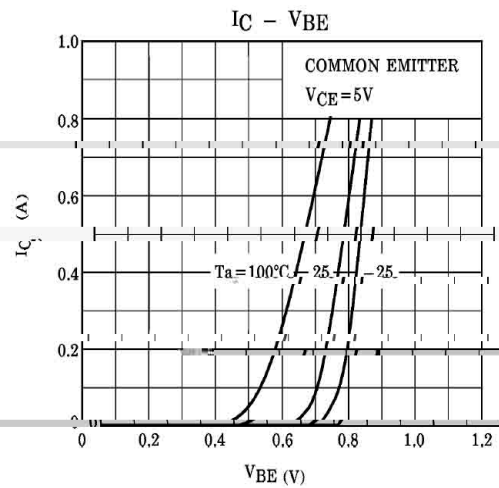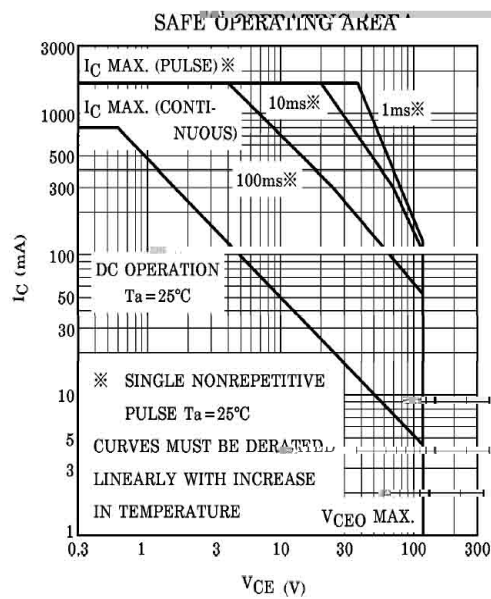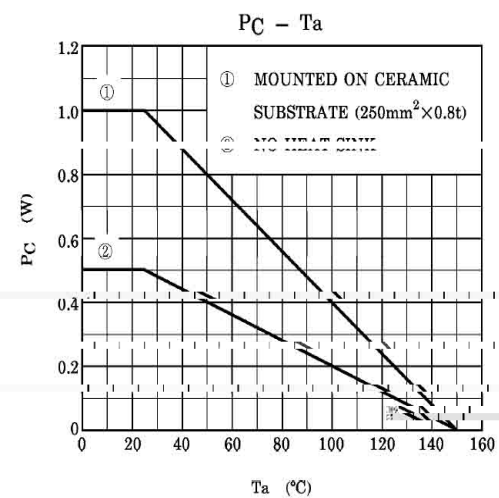


Package Dimensions

SOT-89 单位: mm

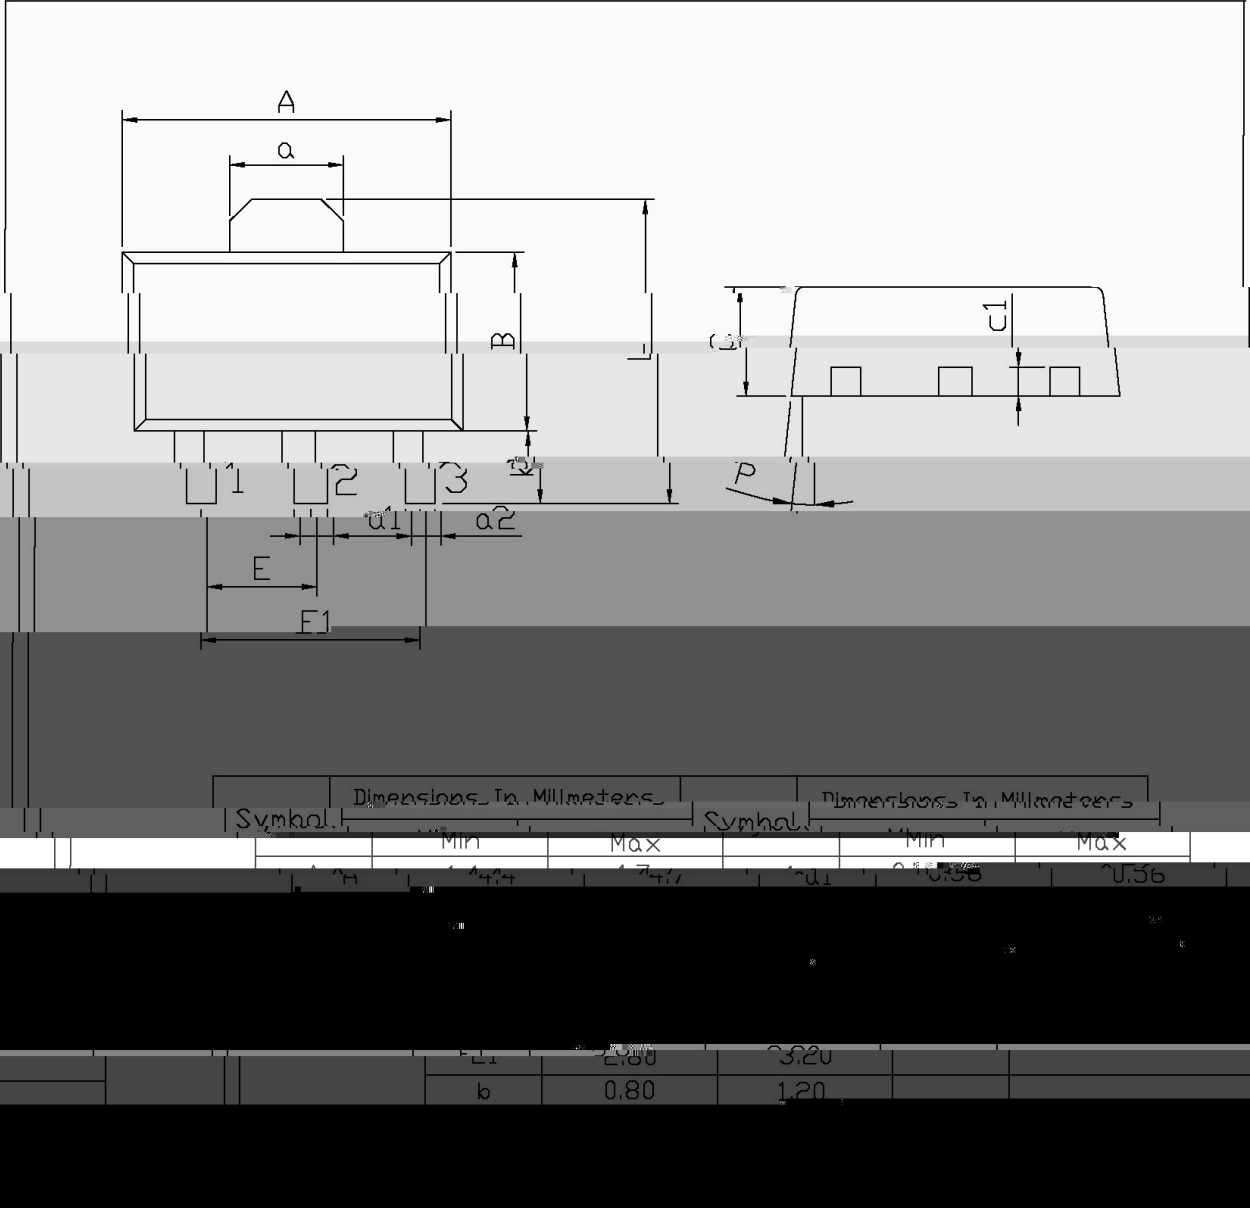

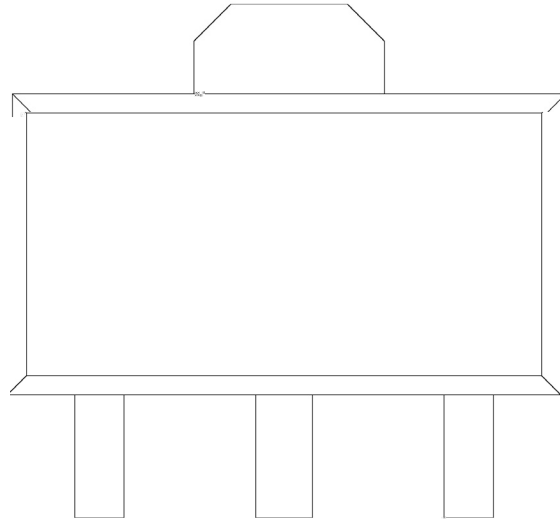

热冲击试验 / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

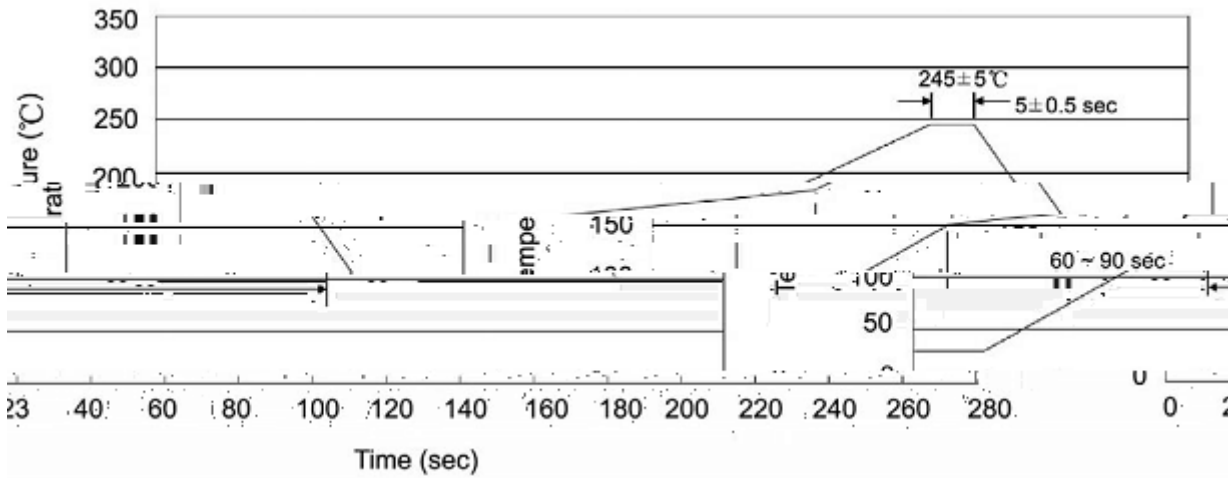

试验步骤

1. 预加热: 25~150 °C, Time: 60~90sec;
2. 峰值温度: 245±5 °C, Time: 5±0.5sec;
3. 冷却速度: 2~10 °C/sec.

Note:

1. Preheating: 25~150 °C, Time: 60~90sec.
2. Peak Temp.: 245±5 °C, Duration: 5±0.5sec.
3. Cooling Speed: 2~10 °C/sec.

焊接热阻试验 / Resistance to Soldering Heat Test Conditions

试验条件: 260±5 °C, Time: 10±1 sec. Temp.: 260±5 Time: 10±1 sec

包装规格 / Packaging SPEC.

包装形式 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	

注意事项 / Notices