

/ Descriptions

SOT-89 NPN Silicon NPN transistor in a SOT-89 Plastic Package.


/ Features

Low $V_{CE(sat)}$, High performance at low supply voltage.


/ Applications

AF Power amplifier.

/ Equivalent Circuit



/ Pinning




PIN1 Base PIN 2 Collector PIN 3 Emitter

/ Marking

h_{FE} Classifications Symbol	P	Q	R
h_{FE} Range	180 270	230 380	340 600
Marking	HTP * *	HTQ * *	HTR * *


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	25	V
Emitter to Base Voltage	V_{EBO}	7.0	V
Collector Current-Continuous	I_C	3.0	A
Collector Current -Continuous(Pulse)	I_{CP}	5.0	A
Collector Power Dissipation	P_C	1.0	W
Junction Temperature	T_j	150	
Storage Temperature Range	T		

/ Package Dimensions

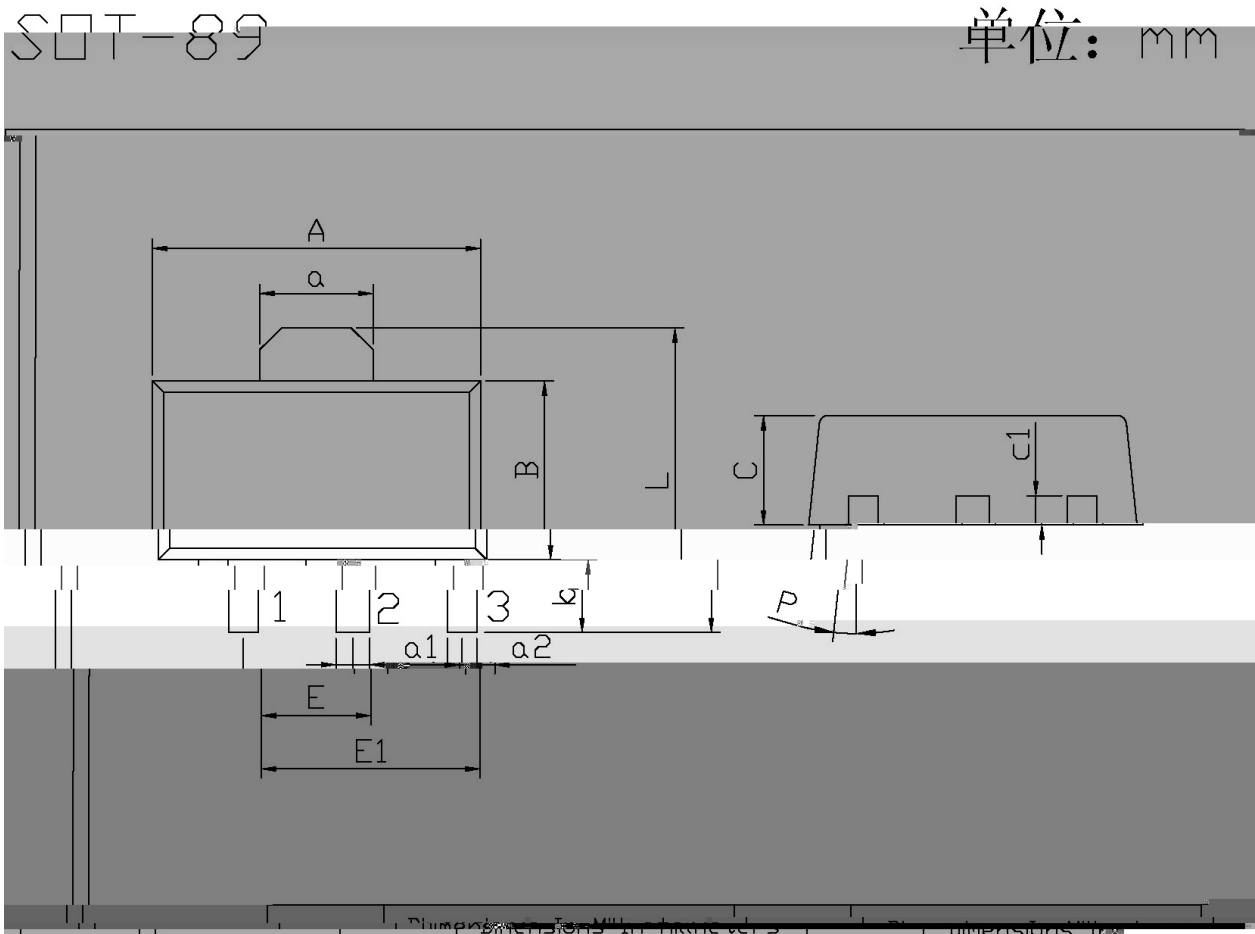

Symbol	2.25V	2.5V	2.8V	3.3V	5.0V
L	3.8/8	4.4/8	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P	6°	
E1	2.80	3.20			
b	0.80	1.20			

() /

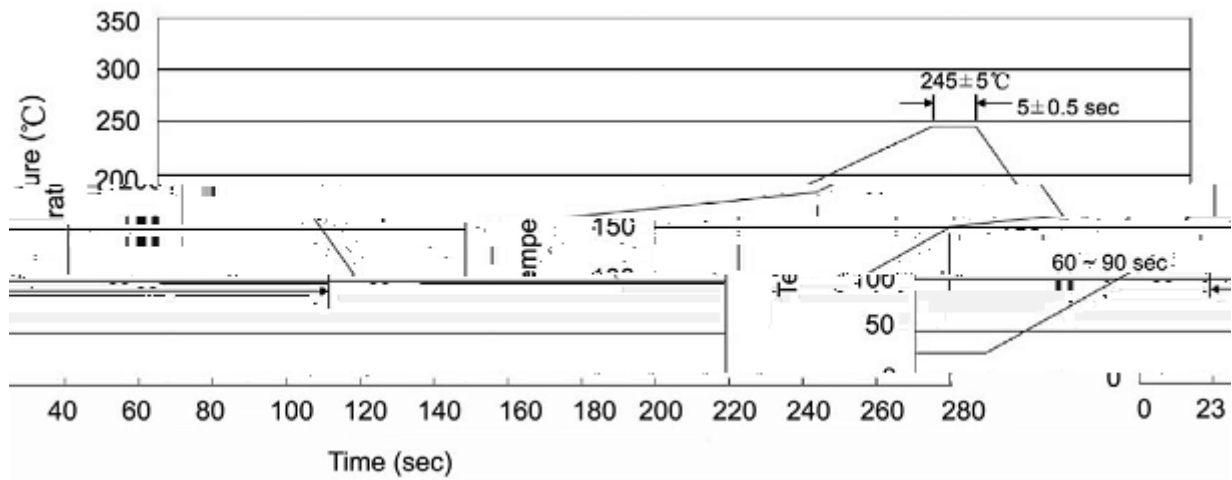

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7 ×12	s	