

/ Descriptions

WR0585 ММ Ё QSQ Æ Ñ ç s ll 1 Silicon NPN transistor in a TO-252 Plastic Package.


/ Features

Љ 5VE97<DG Ы ´
Complementary pair with 2SB649AD.


/ Applications

Љ Æ H Љ l l ' ð ð
Low frequency power amplifier.

/ Equivalent Circuit



/ Pinning



PIN1 χ Base PIN 2,4 χ Collector PIN 3 χ Emitter

/ h_{FE} Classifications & Marking

h _{FE} Classifications Symbol	B	C	D
h _{FE} Range	60 120	100 200	160 320

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	180	V
Collector to Emitter Voltage	V_{CEO}	160	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	1.5	A
Collector Current – Continuous(Pulse)	I_{CP}	3.0	A
Collector Power Dissipation	P_C	1.0	W
Collector Power Dissipation	$P_C(T_c=25^\circ C)$	10	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=1.0mA$ $I_E=0$	180			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=10mA$ $R_{BE}=\infty$	160			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=10mA$ $I_C=0$	5.0			V


/ Electrical Characteristic Curve



/ Package Dimensions



/ Marking Instructions

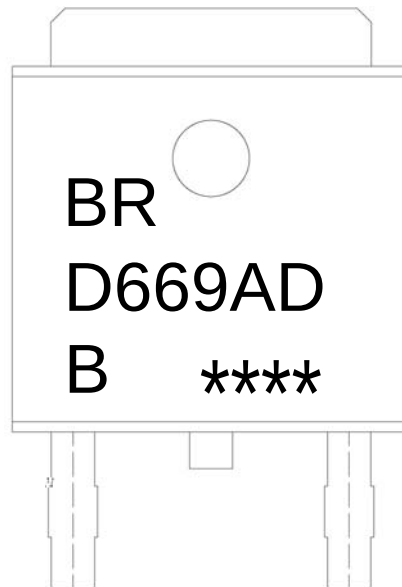

ب"خ

BR χ 𐎧𐎺𐎠 𐎧𐎶𐎵𐎶𐎠

G99<DG χ 𐌸 𐌿 𐌺 𐌸

$$E = h_{FE} \cdot 6 \text{ } \Gamma_D$$
$$---\chi \quad \mathbb{H} \cdot f \check{\eta}^N \Gamma_D \quad \mathbb{I} \cdot f \check{\eta}^N \Psi \rho$$

Note:

BR: Company Code

D669AD: Product Type.

B: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

(