




TO-126F(R) PNP Silicon PNP transistor in a TO-126F(R) Plastic Package.

Low $V_{CE(sat)}$, High V_{CEO} .

Low frequency power amplifier applications.





PIN1 Base PIN 2 Collector PIN 3 Emitter

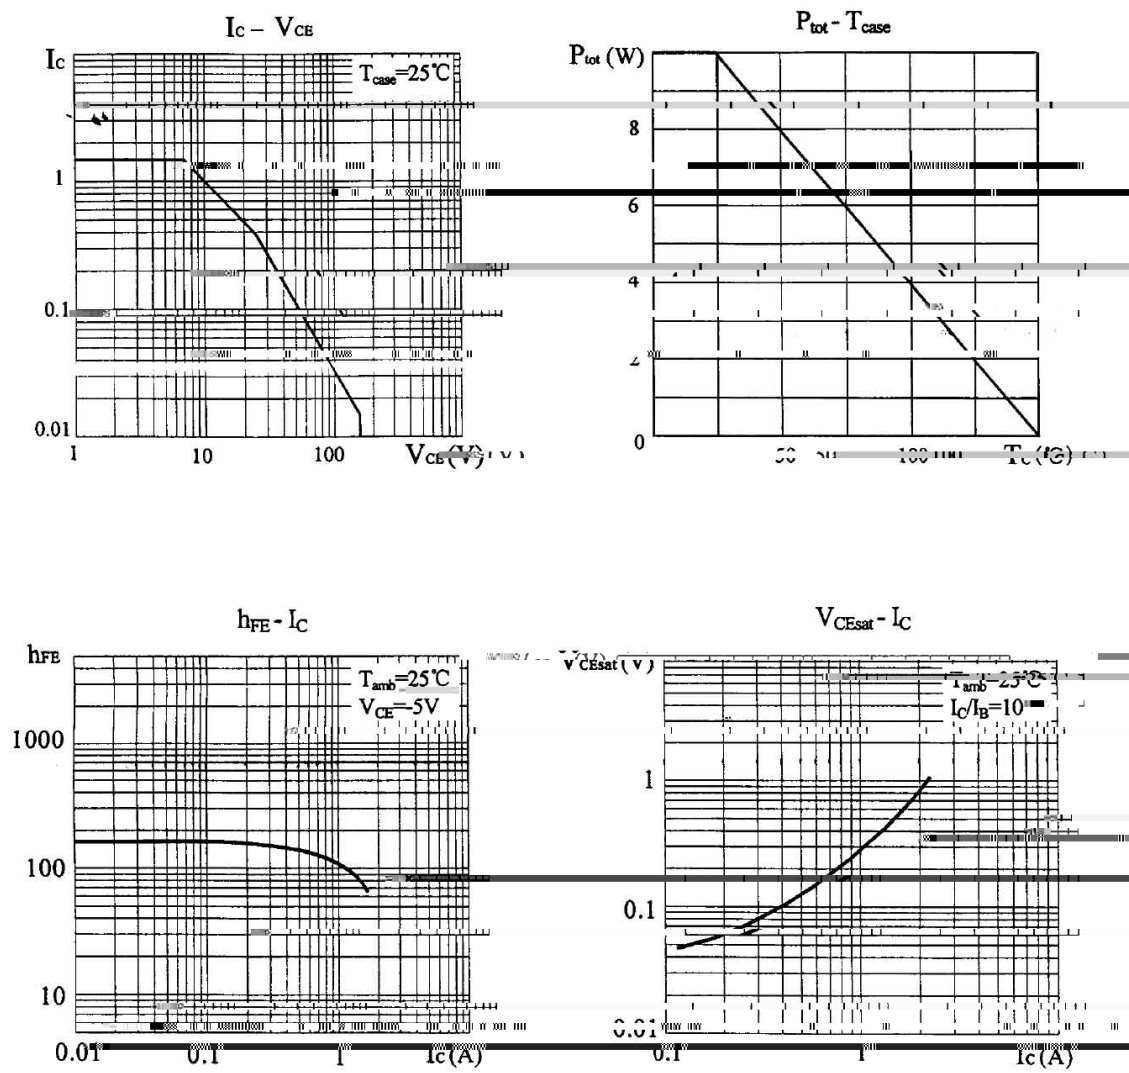

TOP VIEW

FRONT VIEW

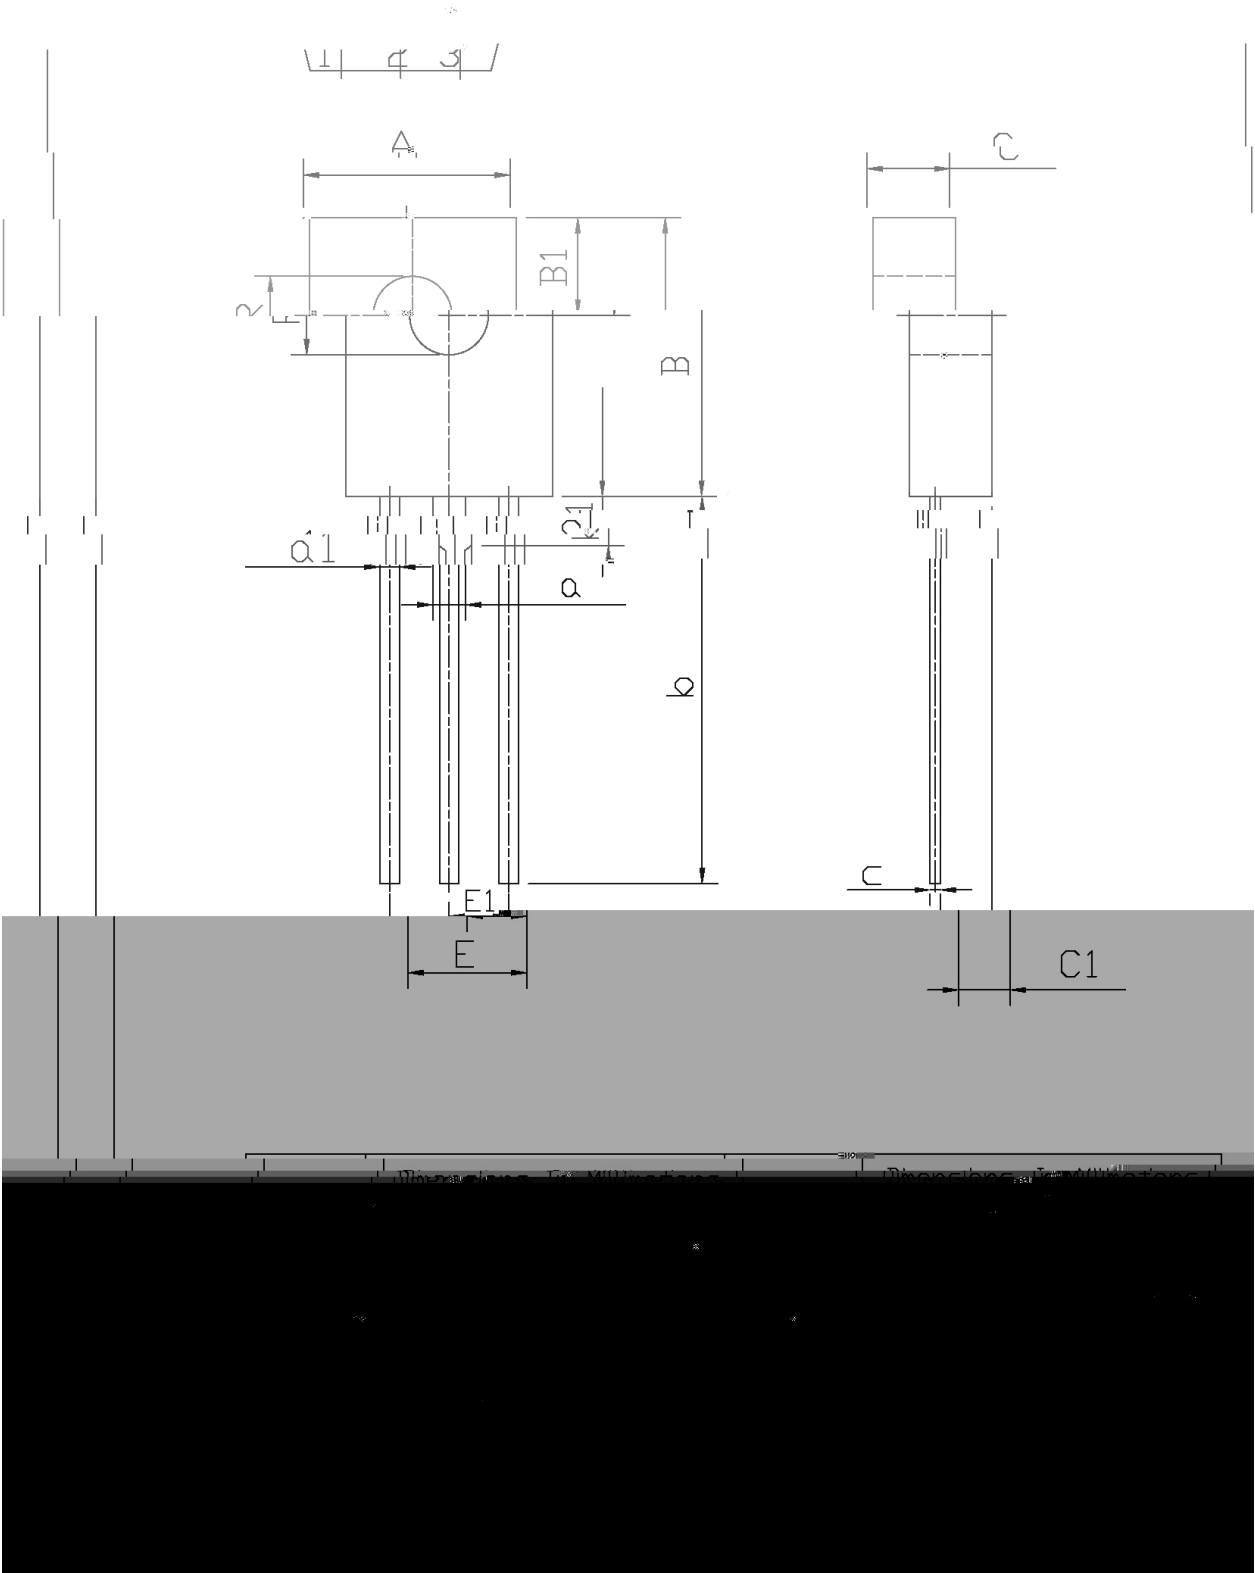

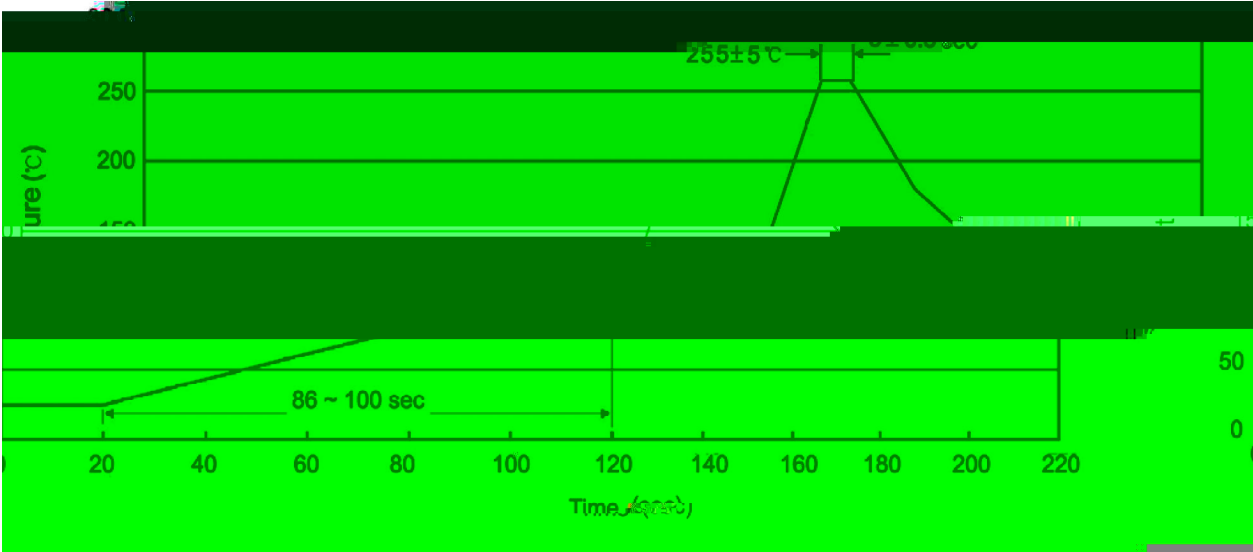

Note:

- | | | | |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 1/2 | | |