


	! " # \$	% ! " & ' (	! ") * & + ,	- .	/ 0
1	234564467		8 9 75 : 3; < = >	? @ A	
1	23236B65		ΔV_{Load} $C_{\Delta V_{Line}}$ D53CB3CE3CF3 G H 433C; 3C433C; 3 I J K & . L < = > M N H O < = > P	Q R	? @ A



78B05A
Rev.A Apr.-2020




DATA SHEET

TO-263 S T T U V W X Y Z


/ Electrical Characteristic Curve

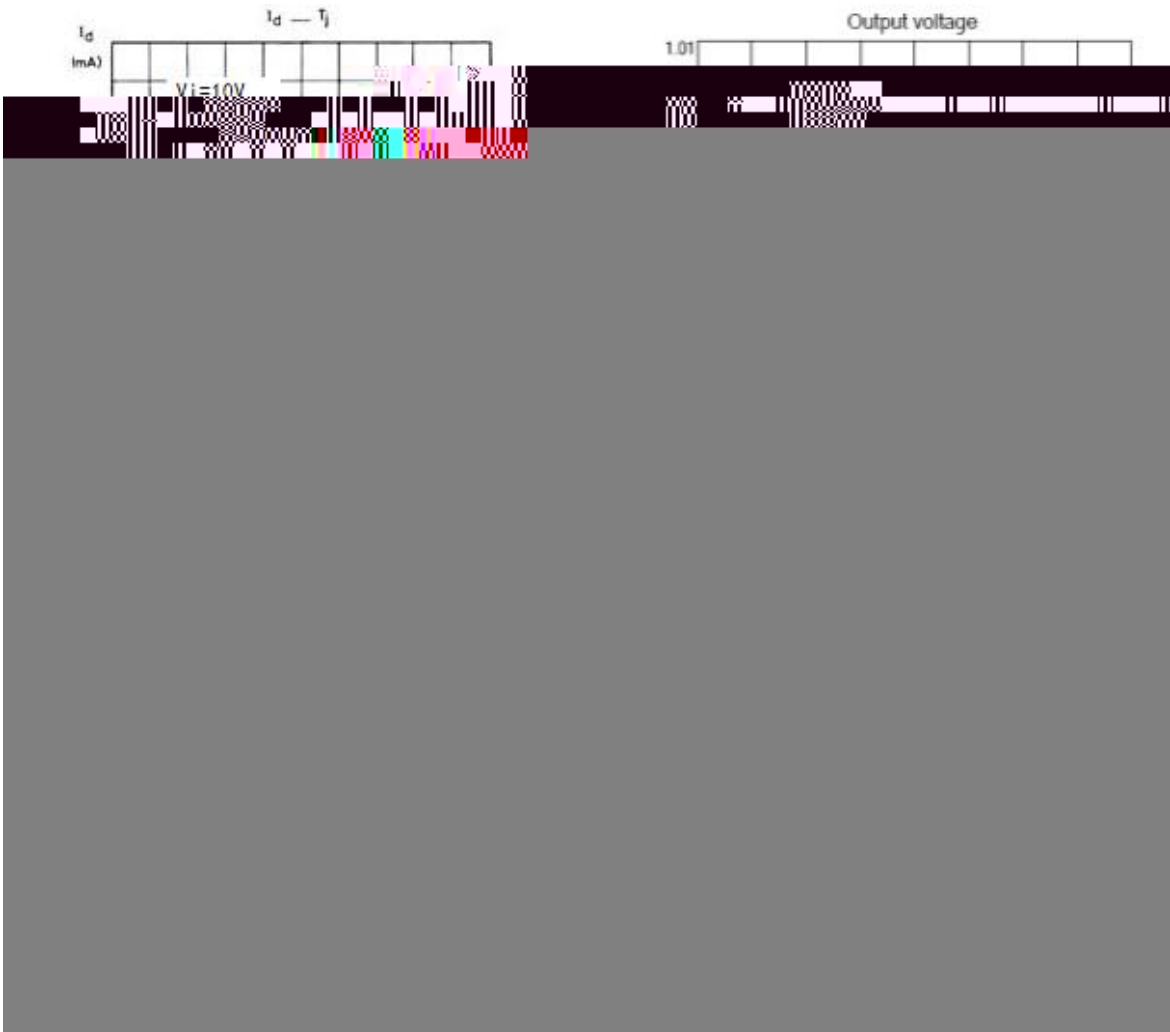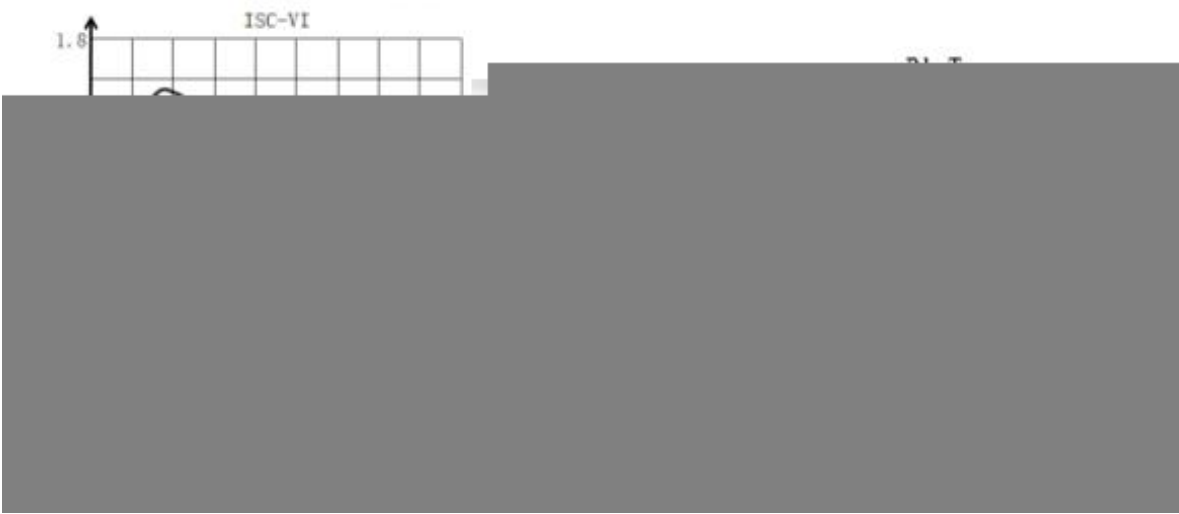

78B05A
Rev.A Apr.-2020

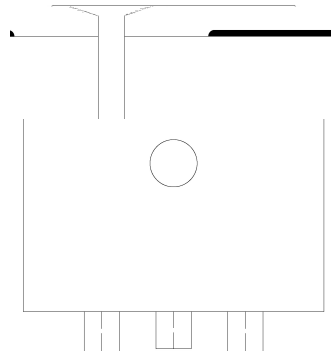

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

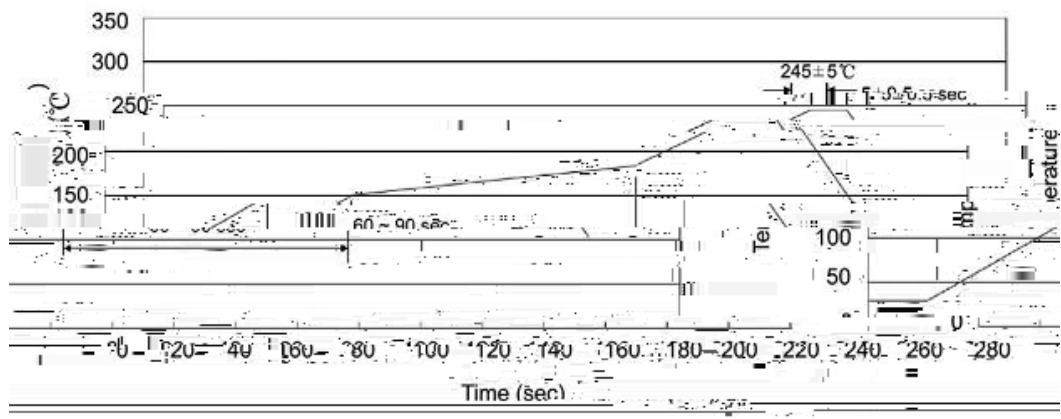

Note:

- | | | | | | |
|---|-------|-----|-----------|---|---------------------------------------|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp:260±5℃	Time:10±1 sec
-------	-----------	-------------	---------------

/ Packaging SPEC.

/ E

