


TO-252 9 2 ... 0ž Voltage Regulator in a TO-252 Plastic Package.

€ 1 9 2 ... k ý ß v ä ' Ä — ½ ' y ? è ' ò ož

3-Terminal regulators ,output current up to 1.5A, internal thermal overload protection and short-circuit limiting.

9 2 ... 0ž


Voltage Regulator.




@ f Parameter	... Z Symbol	f > Rating	% y Unit
Input voltage	V _I	35	V
	R _{JA}	65	/W
	JC	5.0	/W
	OPR	0 125	
Storage temperature range	T	-65 150	

@ f Parameter	... Z Symbol	y i Ú ^ Test Conditions	Â 4 > Min	Á ° > Typ	Â Ý > Max	% y Unit
Output voltage	V _O	T _j =25 JC anc (25.5r9.62	10	10.4	14.3nm5.62	


Electrical Characteristic Curve

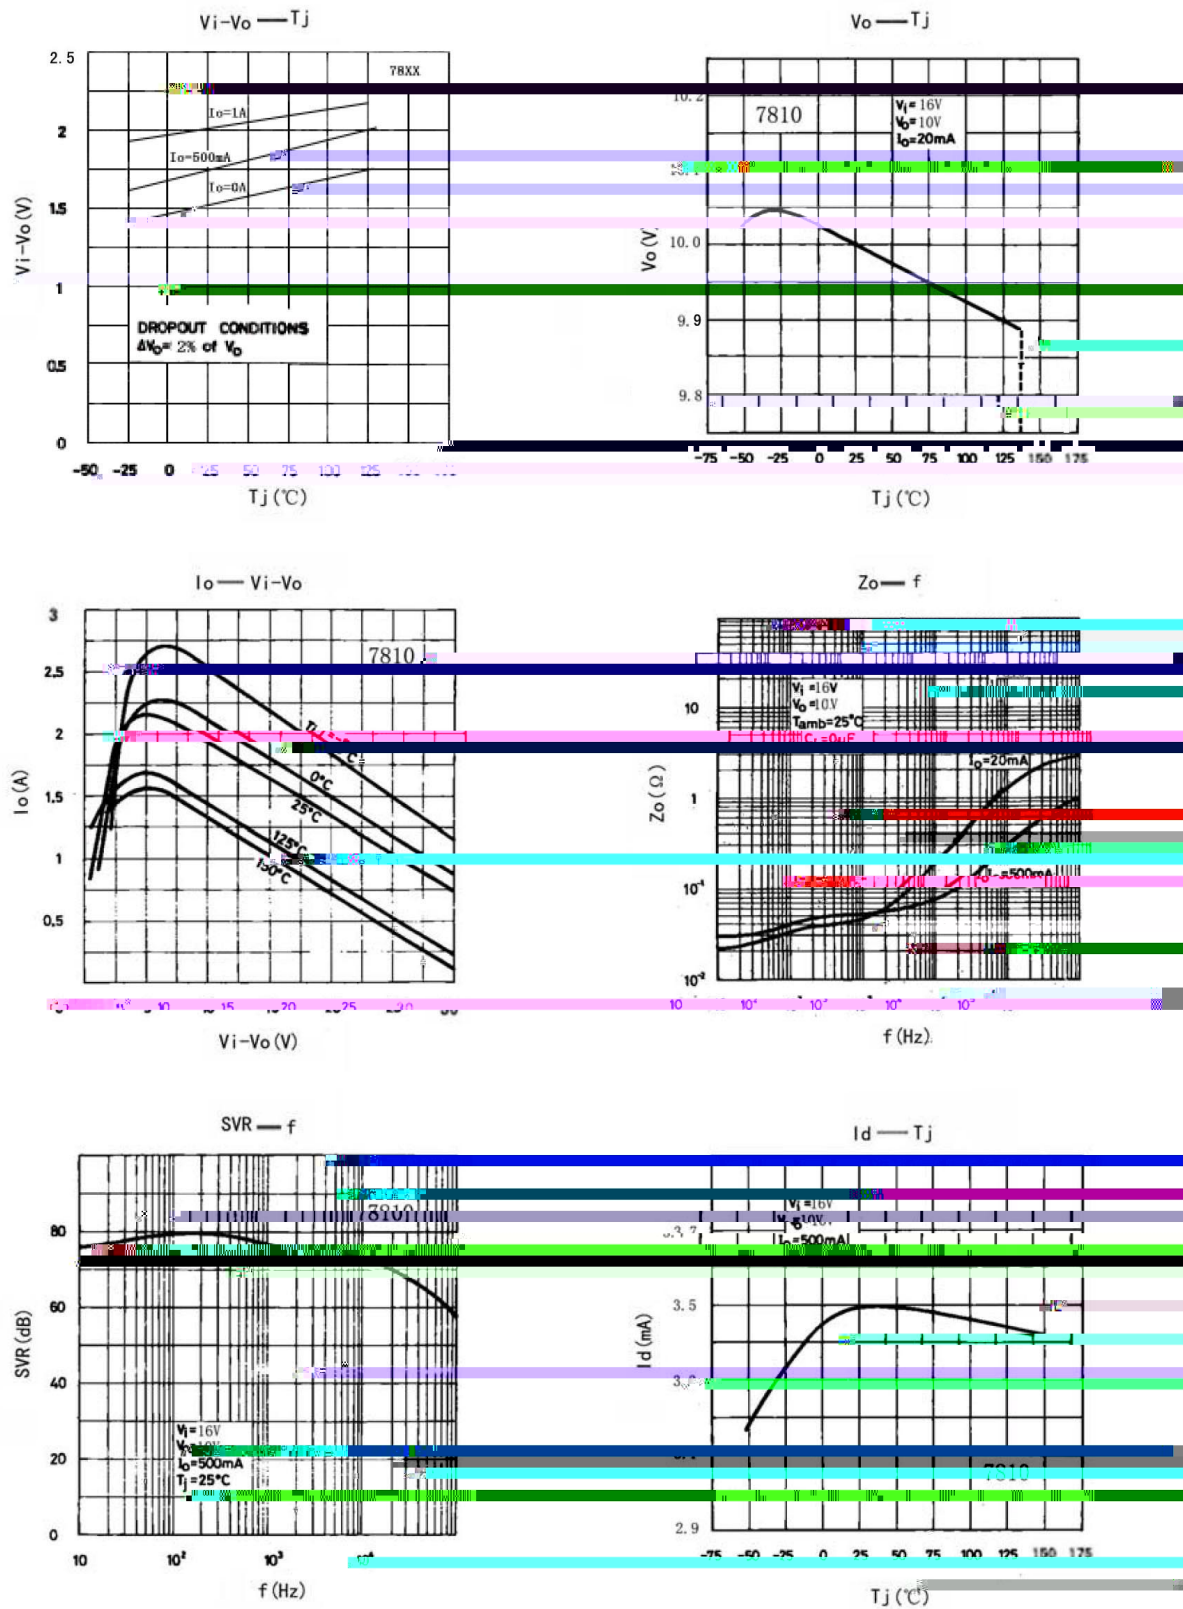

Ø □ =) ♂ / Package Dimensions

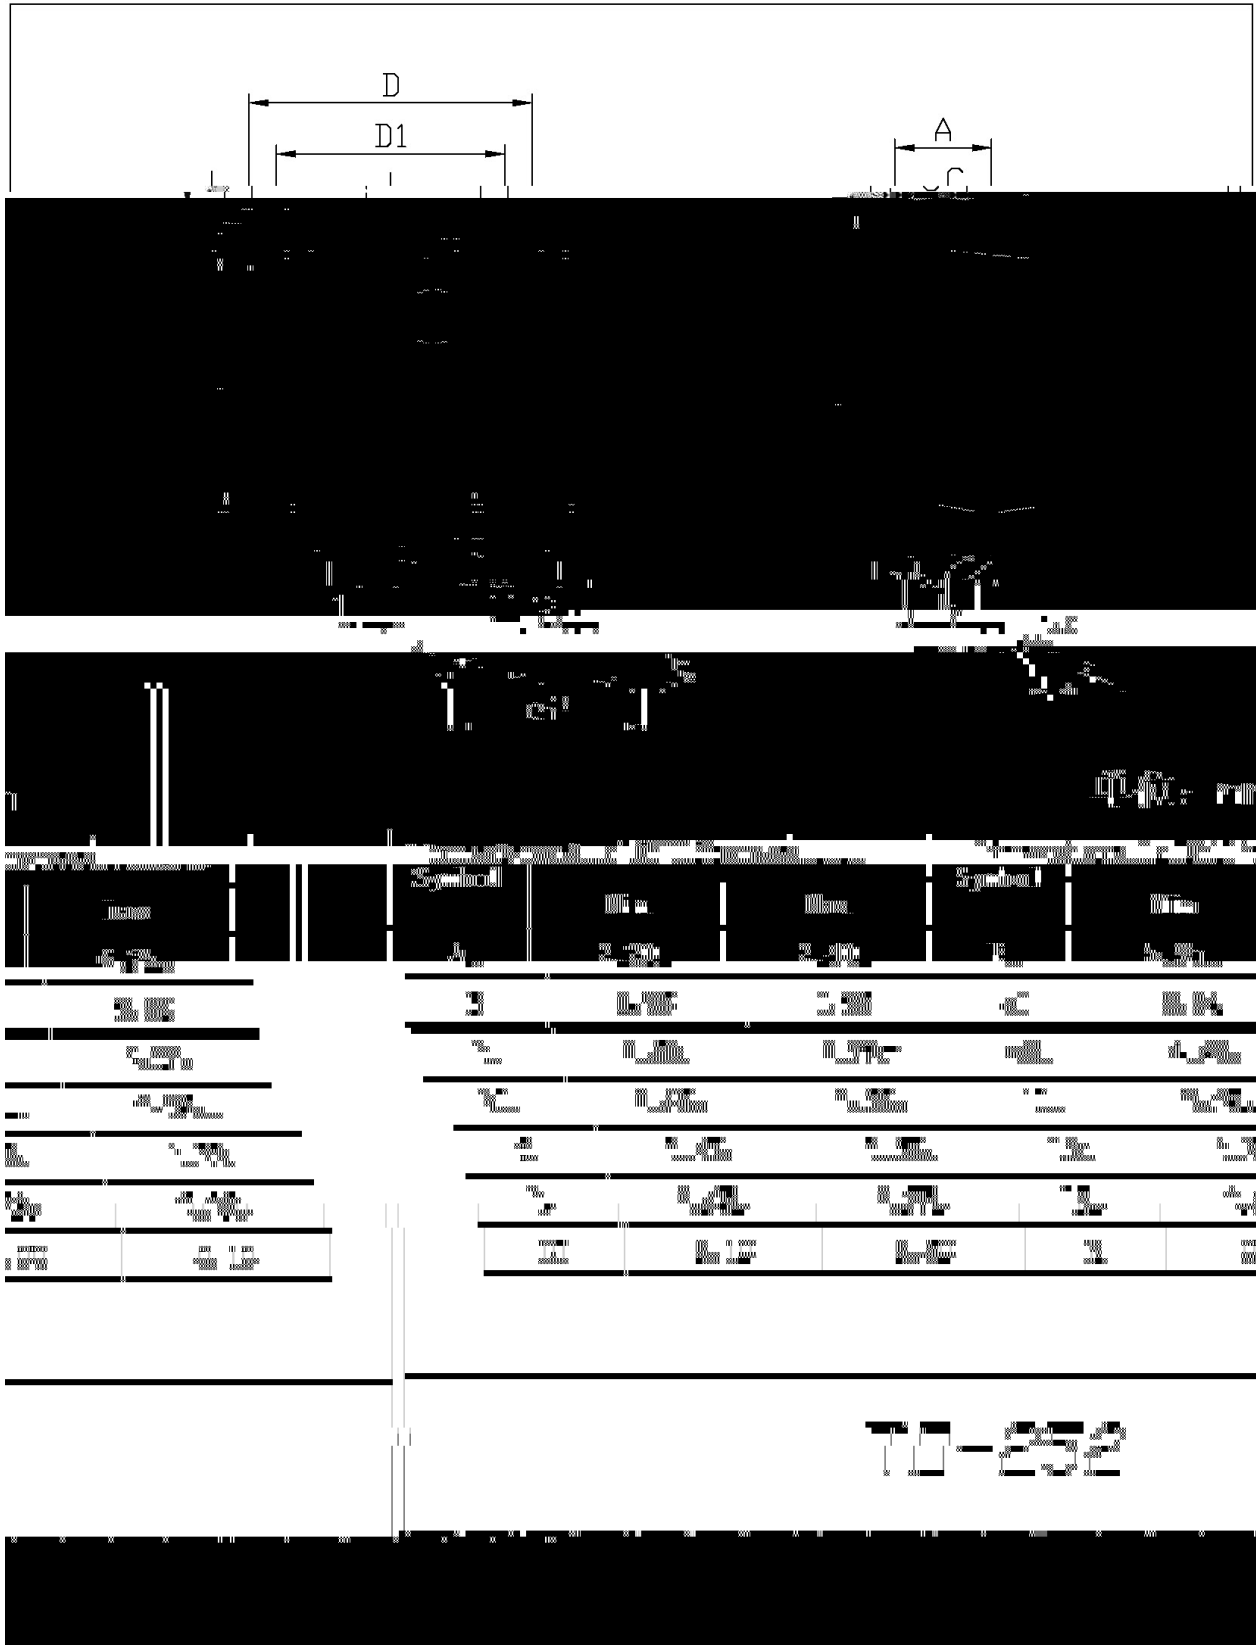

Marking Instructions

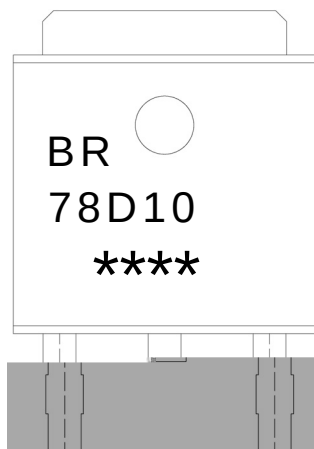

BR

78D10

Company Code

Product Type

Note:

BR: Company Code.

78D10: Product Type.

****: Lot No. Code, code change with Lot No.

