

78D12

Rev.J Jun.-2024



蓝箭电子
BLUE ROCKET ELECTRONICS







DATA SHEET

TO-252


217 R666

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

Electrical Characteristic Curve

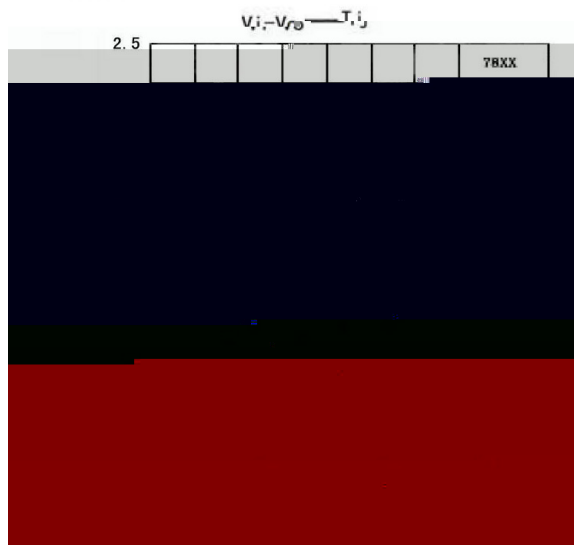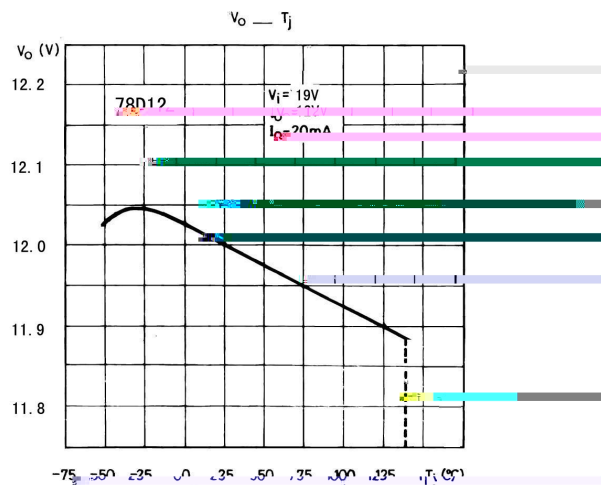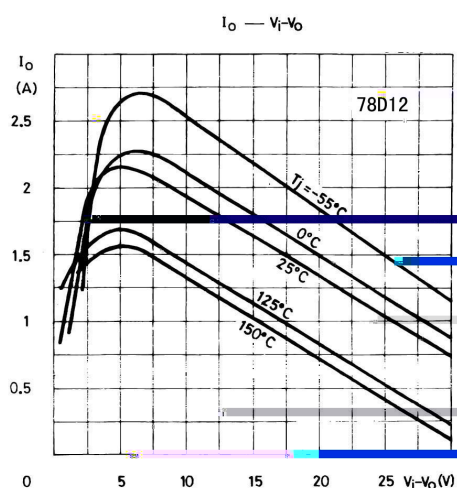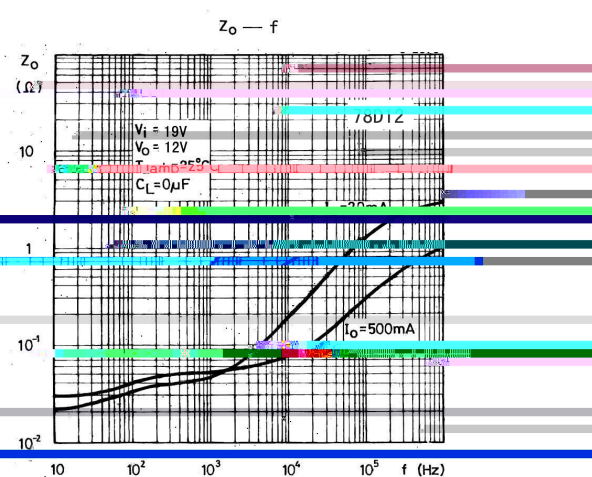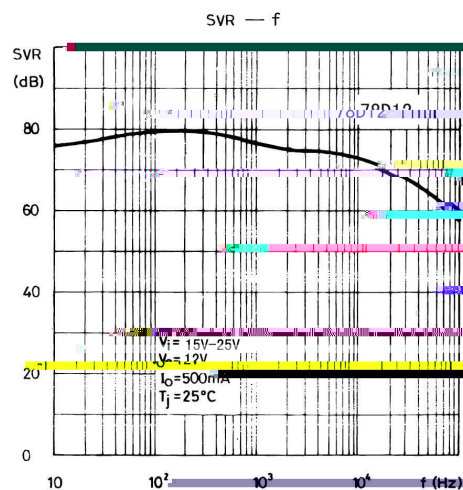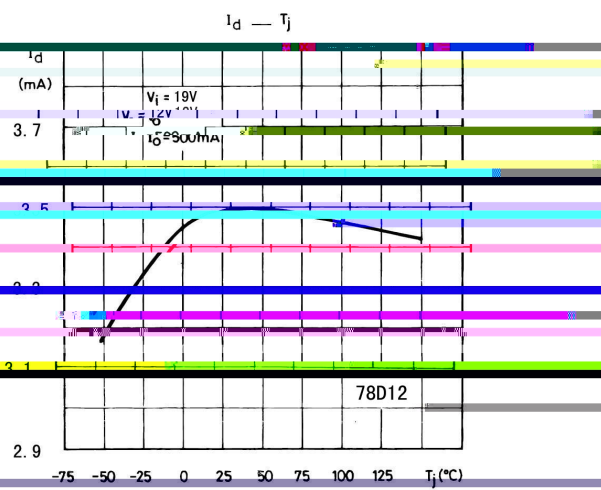

Package Dimensions

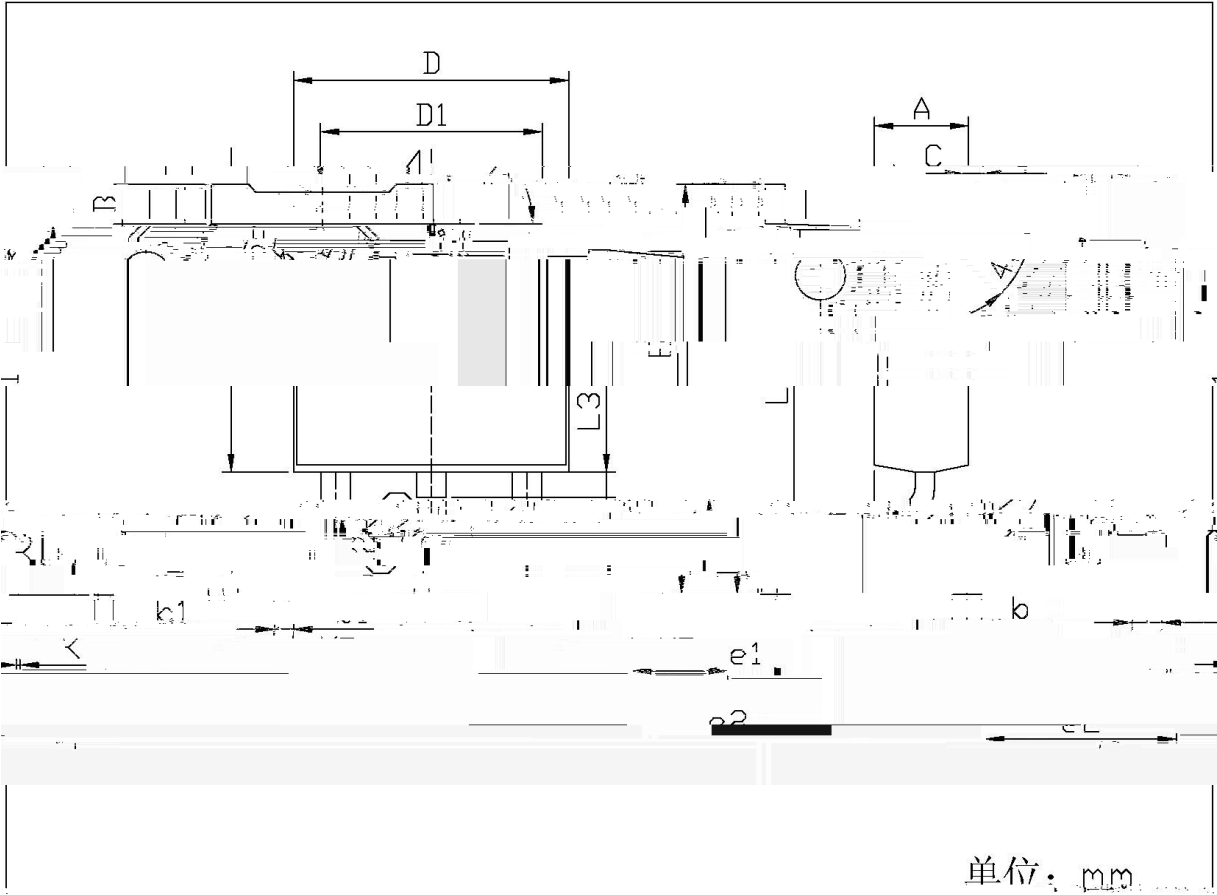

单位: mm

Dimensions, Millimeters		Dimensions, Inches				
Min	Max	Min	Max			
e1	2.24	2.34	B	0.95	1.25	
e2	4.43	4.53	J	0.70	0.90	
L	0.85	1.35	b	0.45	0.55	
L3	0.47	0.55	c	0.05	0.05	
K	6.45	6.75	D	1.3	0.60	0.60
D1	5.10	5.50	K	0.00	0.00	

TO-252

78D12

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

- Note:
- 1

150 180

60 90sec;

2

245 5

5 0.5sec;

3

2 10 /sec.
- 1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

Packaging SPEC.

/ REEL