

تۈۋەن

VRW0;


Ҳ э я і з э ъ / і ъ EF; 9 < й ' ь

Low voltage, high current, Complementary to BC869.

✓ د

$$\tau \cup \tilde{A}H = \tilde{\omega} \cdot \frac{1}{\tau} \cdot \frac{1}{\tau} \cdot 1$$

General purpose switching and amplification, such as audio output stages.

$$\mathcal{L}(\mathbf{f}) = \mathcal{E}$$
 $\tilde{a} \mid \tilde{u}$ PIN1 $\times$ BasePIN 2 χ Collector

PIN 3 $\times$ Emitter

4. H₂

Marking	HCAC [*] _*
---------	--------------------------------

静态特性

J

参数 Parameter	符号 Symbol	额定值 Rating	单位 Unit
Collector to Base Voltage	V_{CBO}	32	V
Collector to Emitter Voltage	V_{CEO}	20	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current-Continuous	I_C	1.0	A
Peak Collector Current	I_{CM}	2.0	A
Peak Base Current	I_{BM}	200	mA
Collector Power Dissipation	P_C	1.35	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

动态特性


J

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=25V$ $I_E=0$			0.1	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=5.0V$ $I_C=0$			0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=1.0V$ $I_C=500mA$	85		375	
	$h_{FE(2)}$	$V_{CE}=10V$ $I_C=5.0mA$	50			
	$h_{FE(3)}$	$V_{CE}=1.0V$ $I_C=1.0A$	60			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1.0A$ $I_B=100mA$			500	mV
Base to Emitter Voltage	$V_{BE(1)}$	$V_{CE}=10V$ $I_C=5.0mA$		620		mV
	$V_{BE(2)}$	$V_{CE}=1.0V$ $I_C=1.0A$			1.0	V
Transition Frequency	f_T	$V_{CE}=5.0V$ $f=100MHz$ $I_C=10mA$	40			MHz


0 É Ø L f

SQT-89

单位: mm

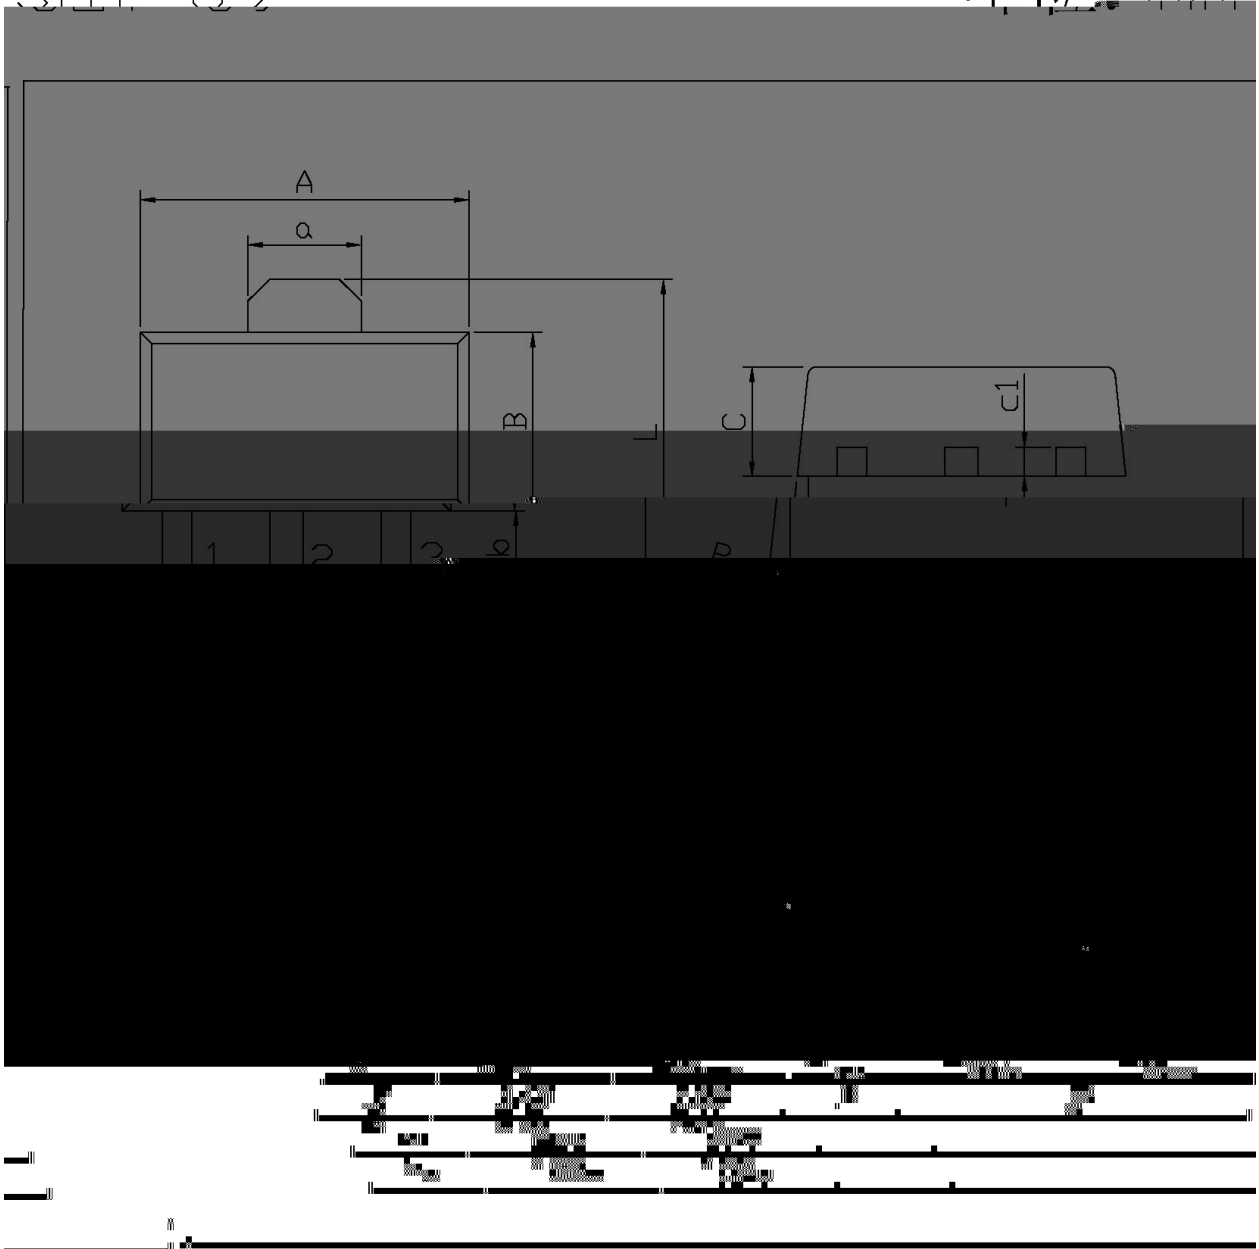

4. 1. 2

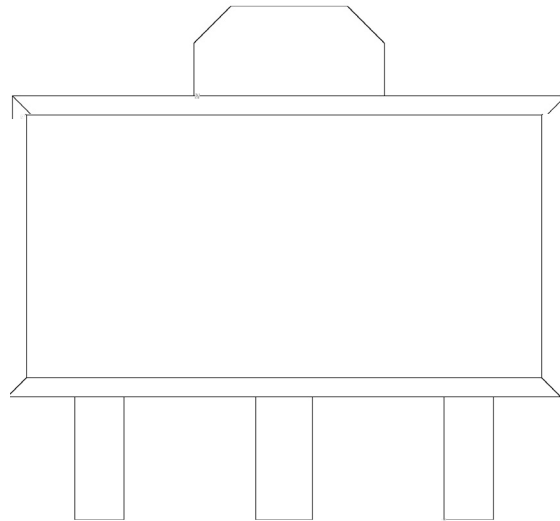

2. 1. 2


HX 3. 1. 2

CACX 3. 1. 2

--X 3. 1. 2 1. 2 1. 2 1. 2 1. 2

Note:

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj +Se0l uhh,

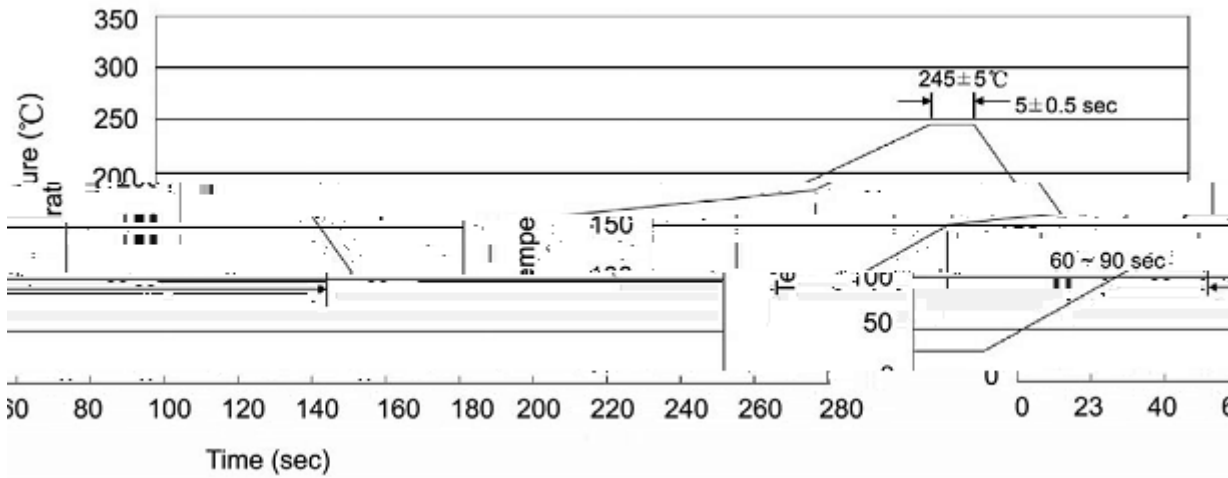

1. Preheating:

25~150 °C, Time: 60~90sec;

2. Peak Temp.: 245±5 °C, Duration: 5±0.5sec;

3. Cooling Speed: 2~10 °C/sec.

Note:

1. Preheating: 25~150 °C, Time: 60~90sec.

2. Peak Temp.: 245±5 °C, Duration: 5±0.5sec.

3. Cooling Speed: 2~10 °C/sec.

4. 0 q ± Y T

□ °C 260±5

Time: 10±1 sec.

Temp.: 260±5

Time: 10±1 sec

9. 1 2 3

□ °C / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 × 12	180×120×180	385×257×392

ä v L Q