BD034L

/ Descriptions

WR0<50P ṂṂ Ŀ SQS ᴁṀ ɥ s ǁ ᒣ

/ a05dc0Meatures

ㅊ ㅊ

/ aApplications 05dc0

I ' ẁ

/ a05dc0Equivalent Circuit



/ 0 5 d c 0 Pinning

X X X

/ h_{FE} Classifications & Marking

V ῼ	ɣ N	ῼӪ	D Ⱨ

BD034L

/ Package Dimensions

TO-92LM Unit: mm

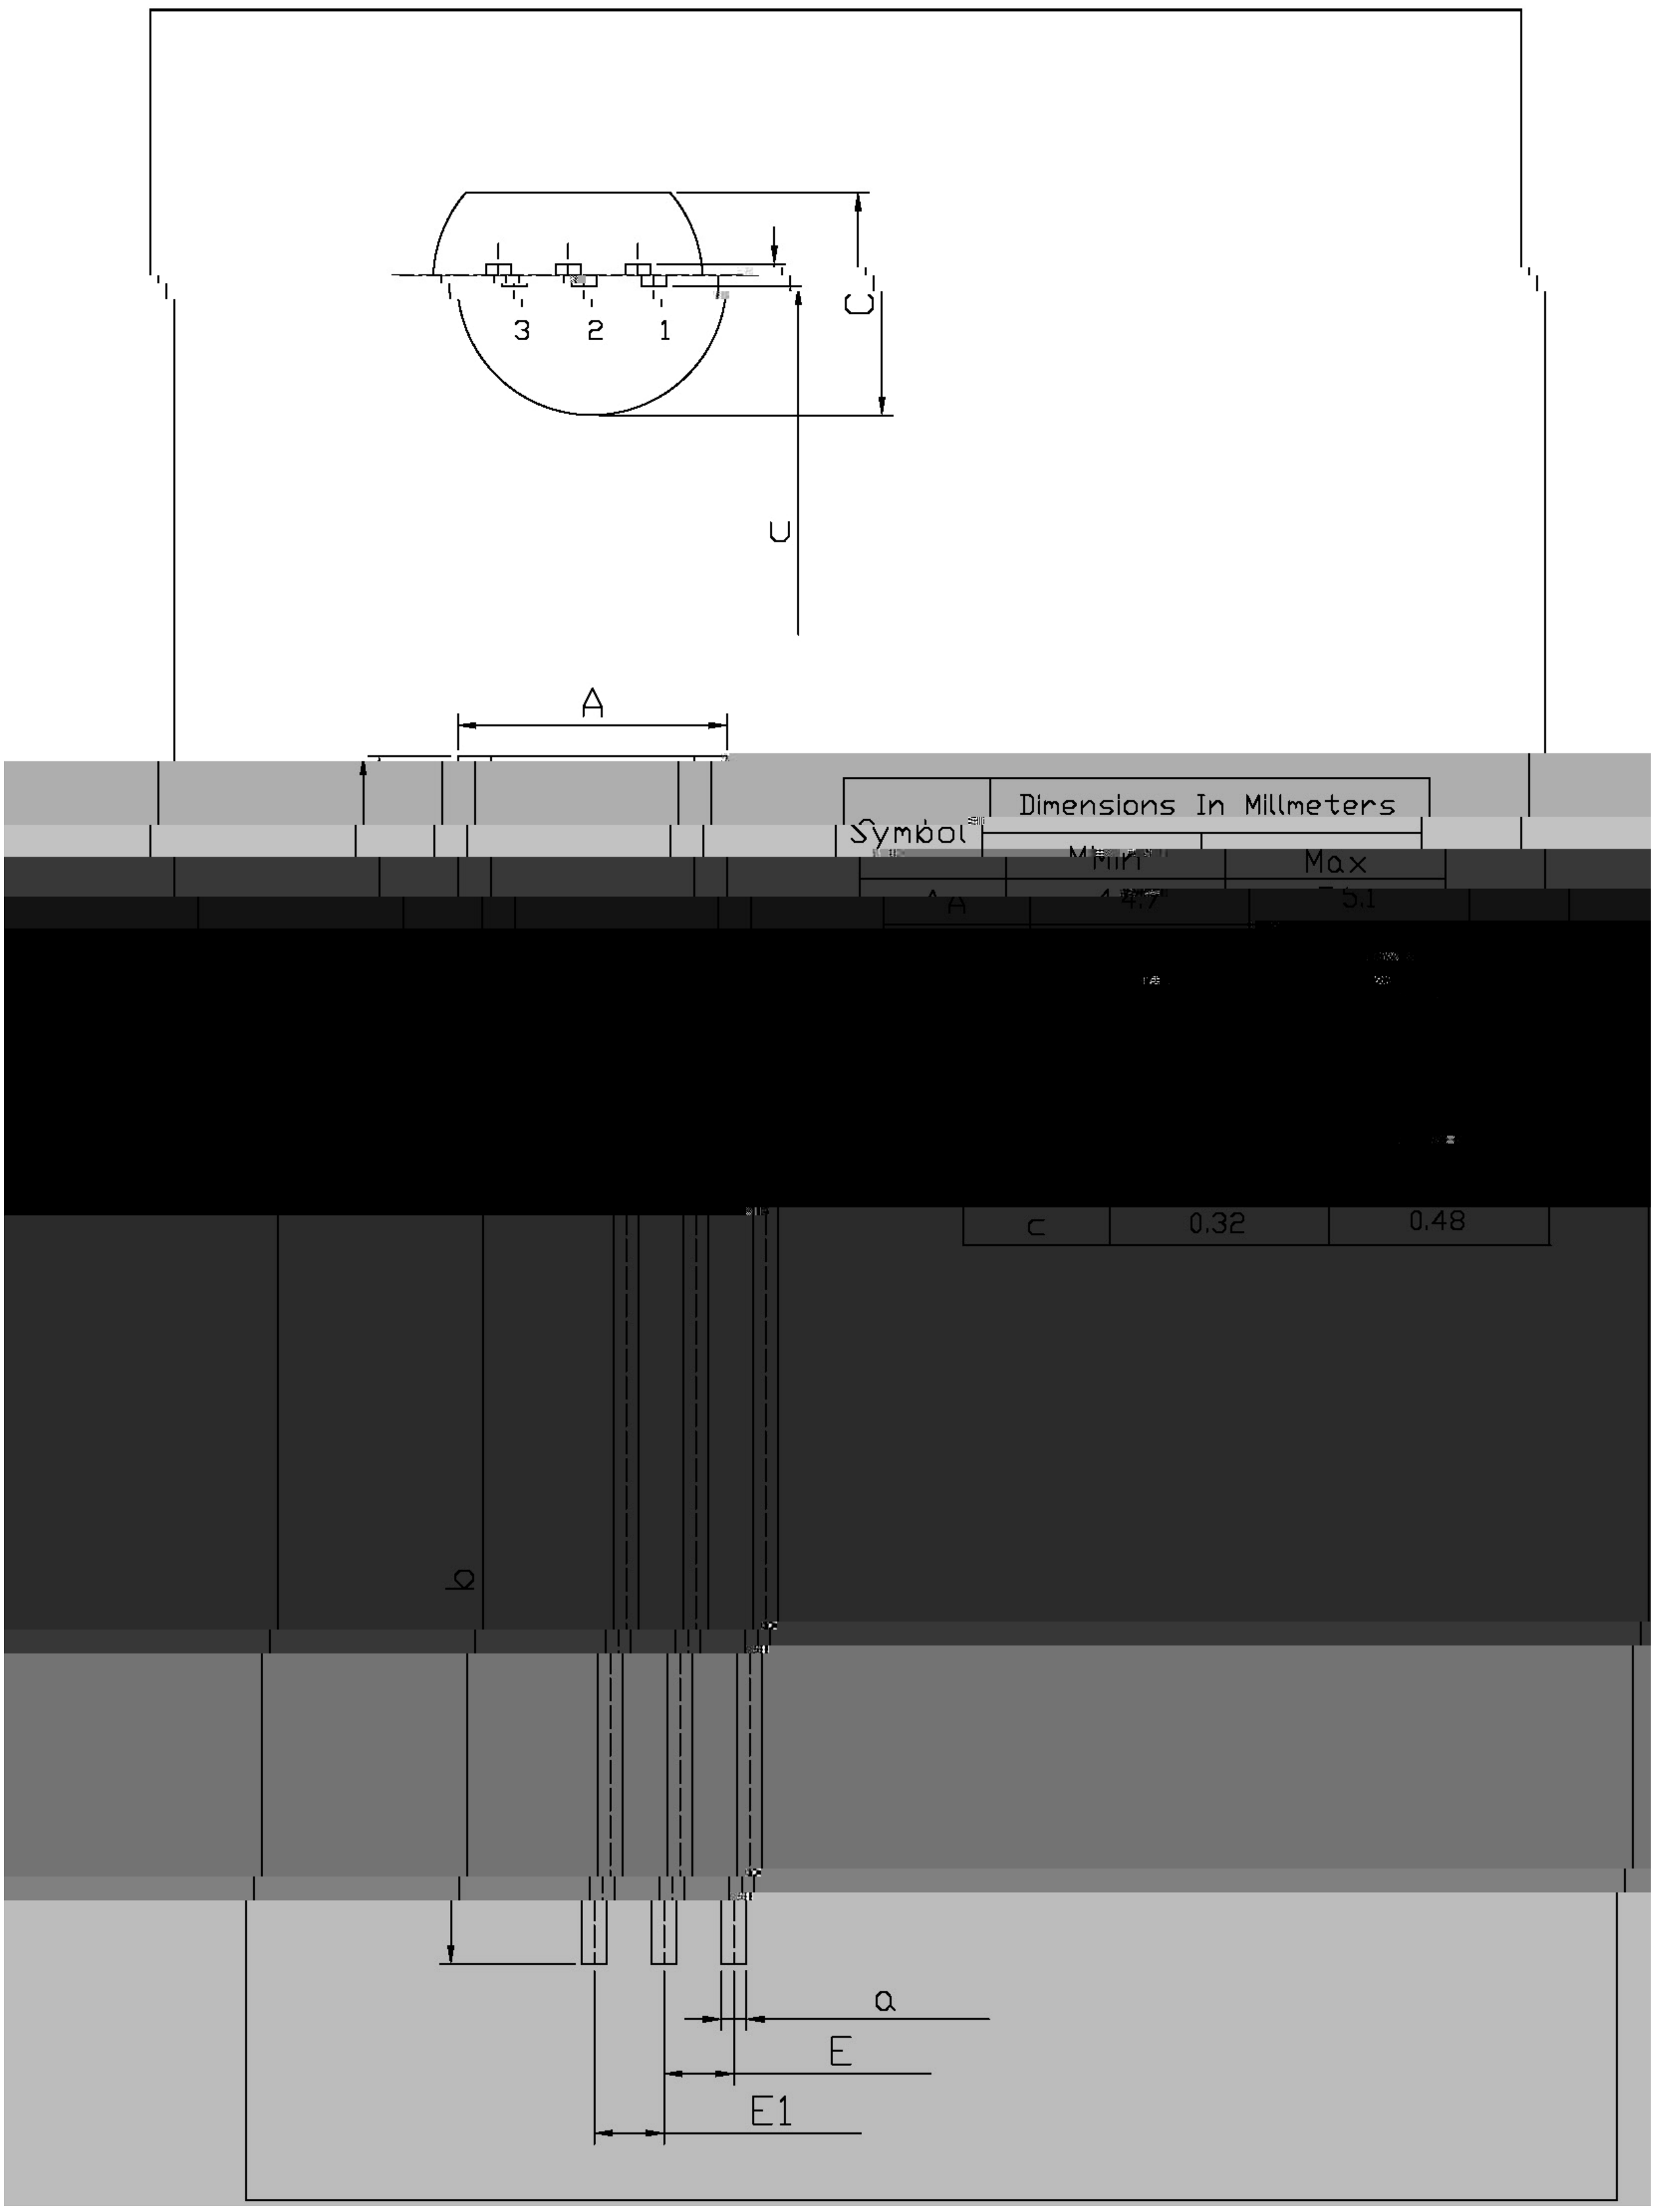

Symbol	Dimensions In Millmeters	
	Min	Max
A	4.7	5.1
[illegible]	[illegible]	[illegible]
c	0.32	0.48

/ Marking Instructions

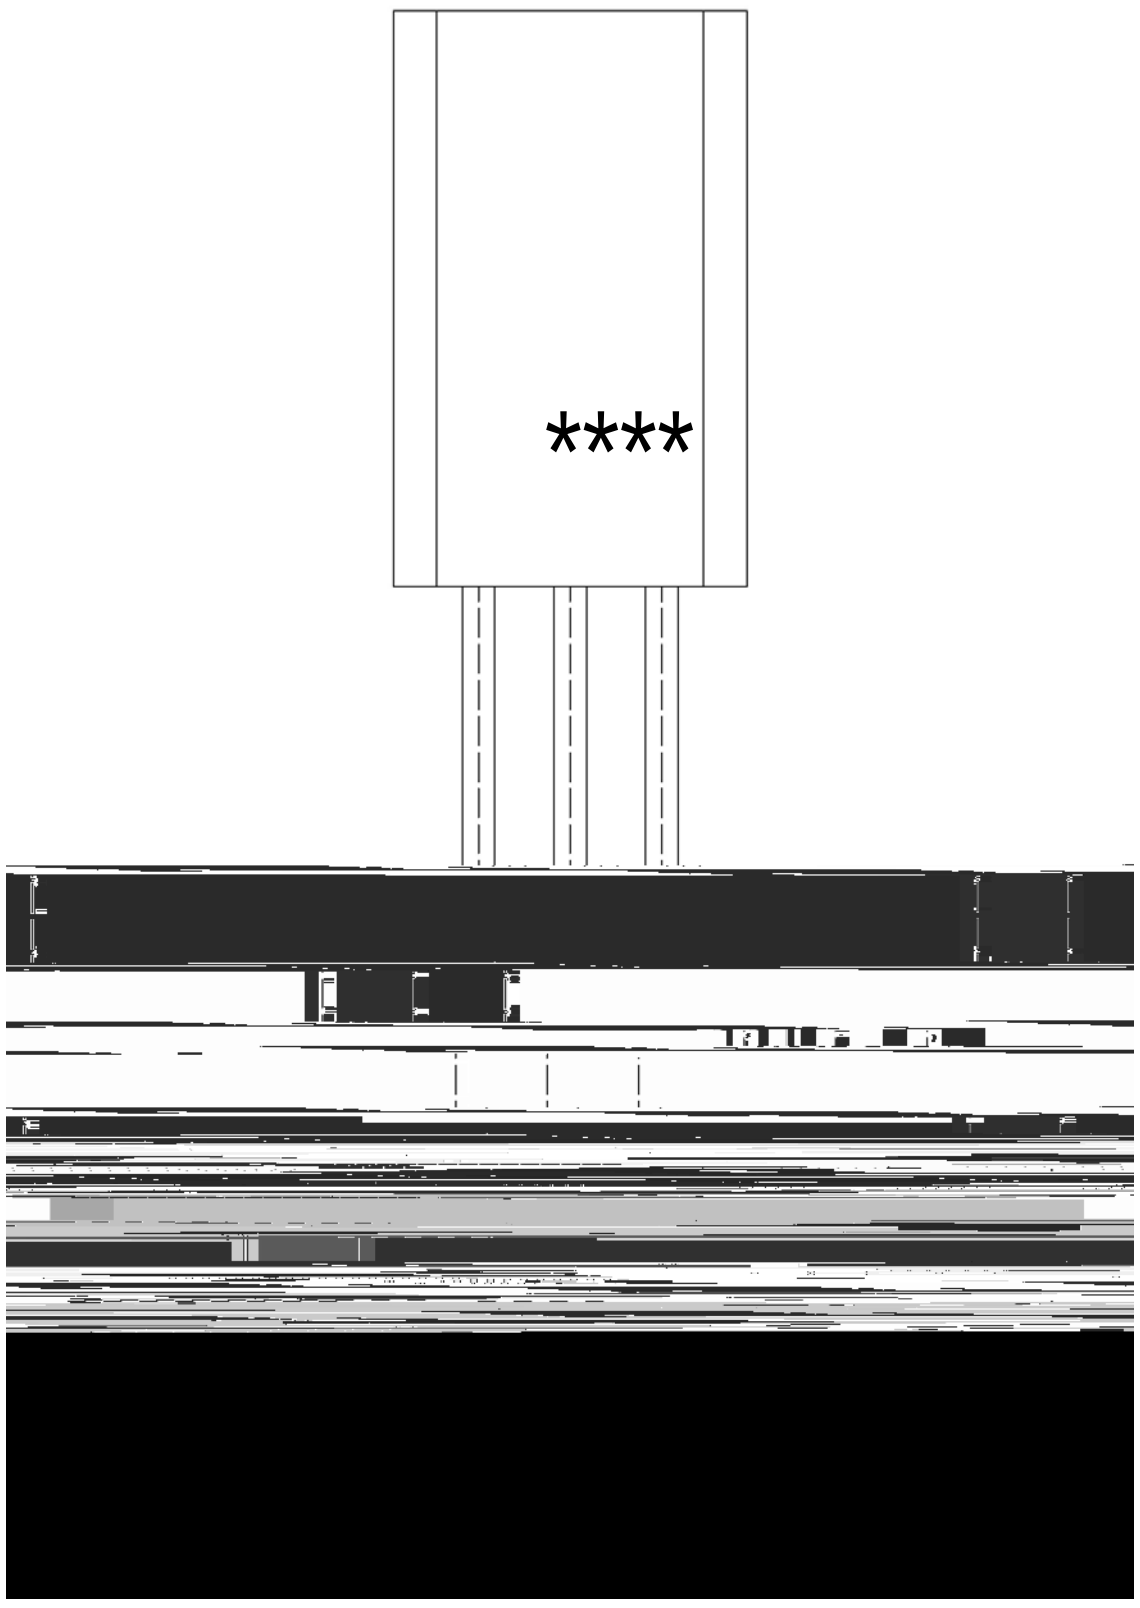

ب ˮ χ

EU꞊	ҥѫ ȝ ᴎ Ҧ
G3670 χ	ҥѫ ȝ ᴺ Ҧ
U꞊	ҥѫ kıн ˂ ⁶ Ҧ
---- χ	ҥѫ ꞁ ғ ή ᴺ Ҧ ι ҿ ꞁ ғ ή ᴺ ψ ק

( ) / Temperature Profile for Dip Soldering(Pb-Free)

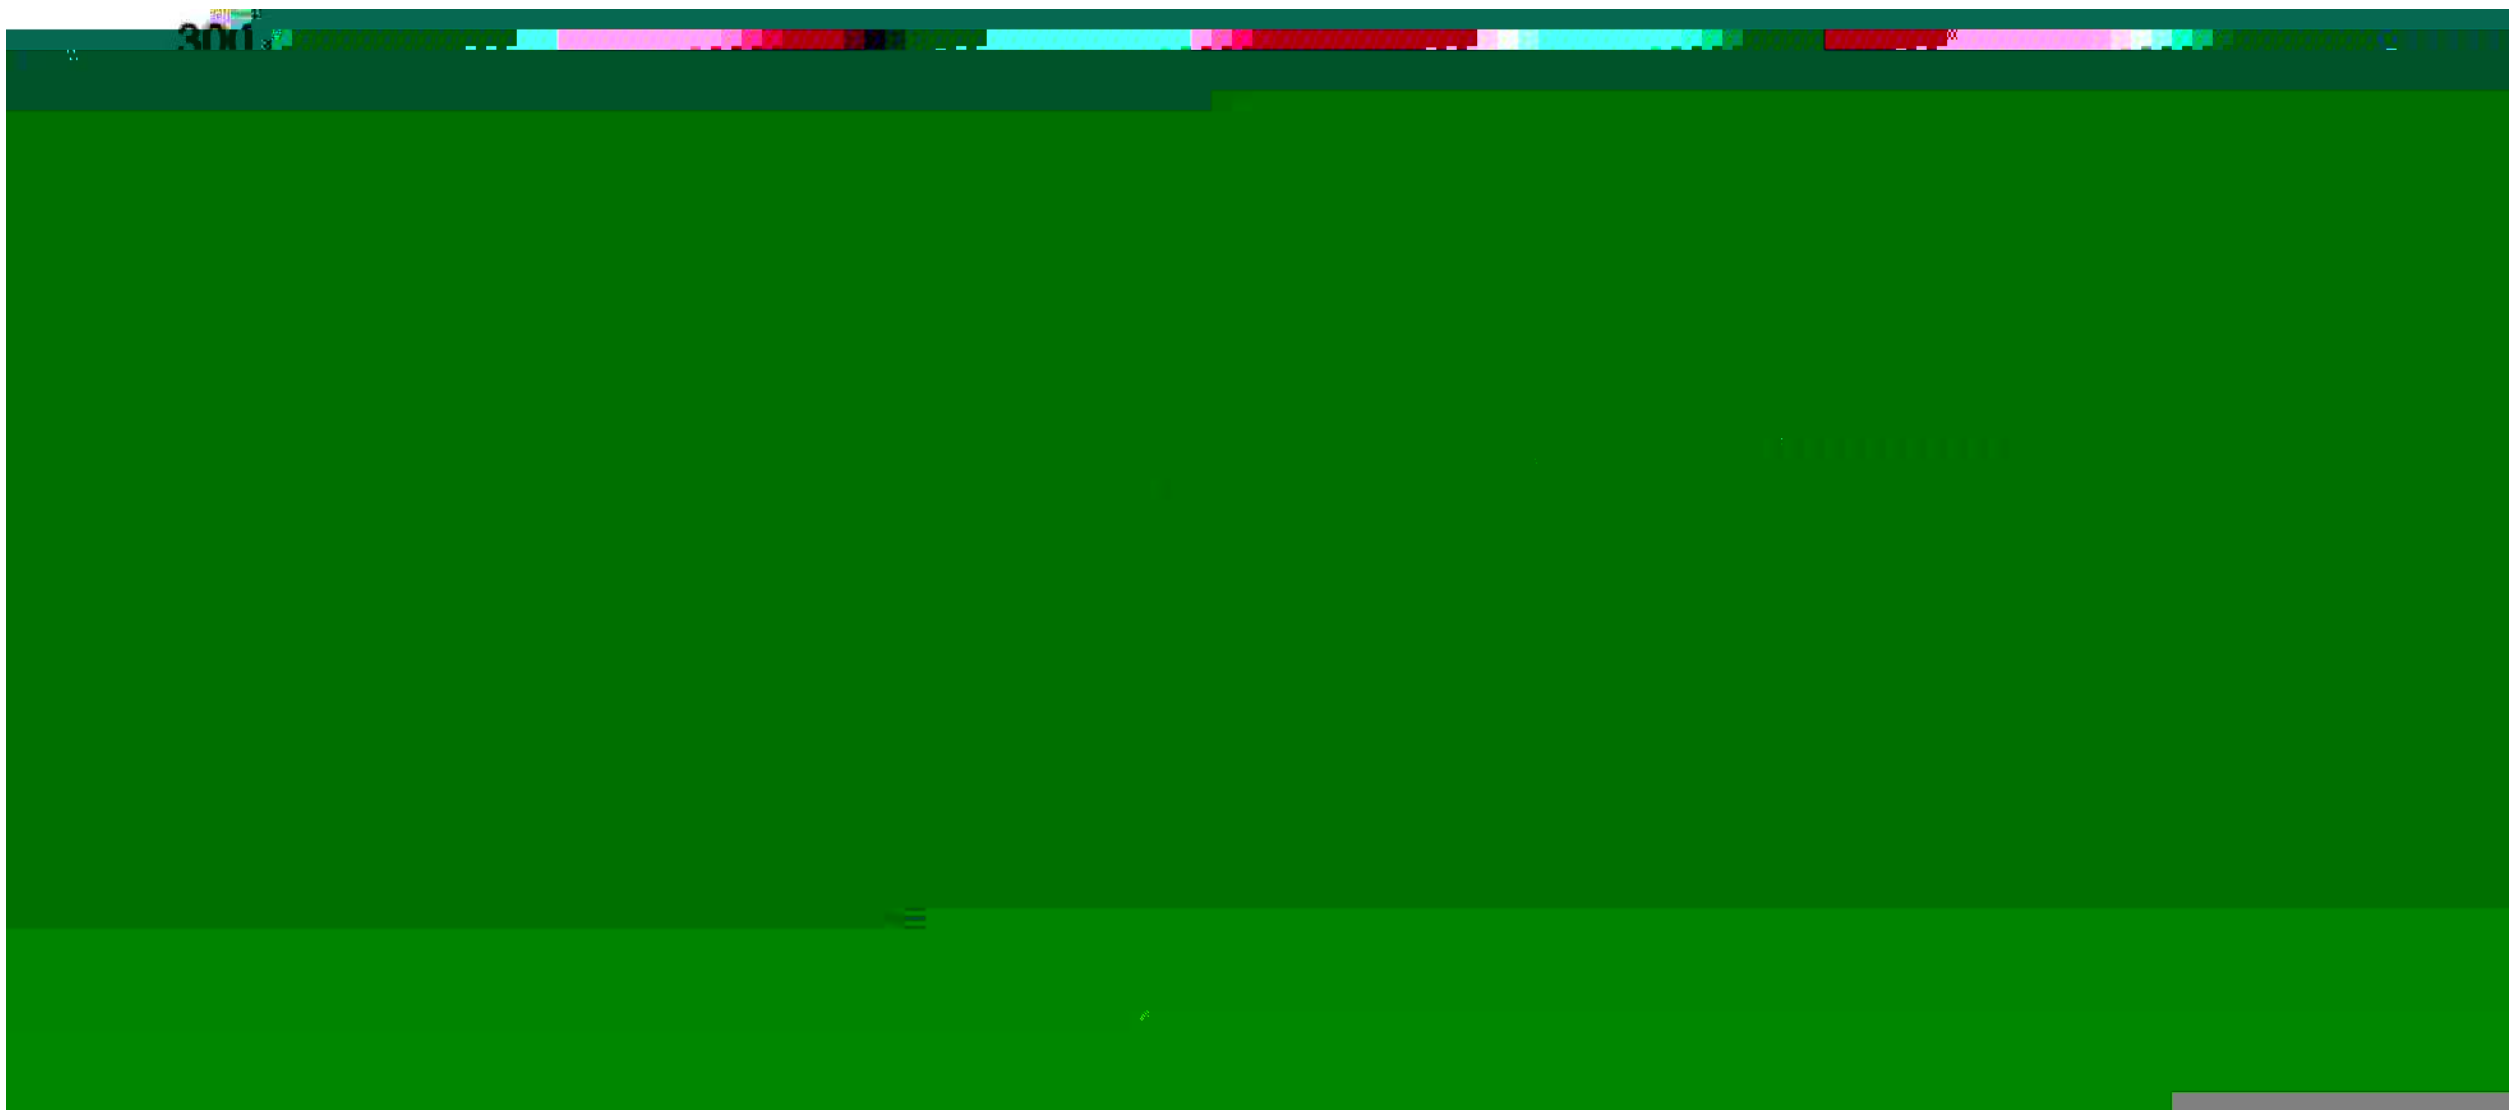

ب ˝ χ

ĺ ♬ □ ẙ Ḱ ɫ ı `H ڙ Ḱ ɫ

ŠӚ □ ẙ ° ɫ ı `H ڙ `Y ﾊ ㎜ ° ° ɫ °

ì ˙ ˥ ˛ ɔ ঌ ẙ ㎜ Ḱ ɫ ɫ

/ Resistance to Soldering Heat Test Conditions

□ ẙ χ ° ɫ `H ڙ χ °

/ Packaging SPEC.

‶Ω ţ γ ŀ

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	