

描述 / Descriptions

SOT-23

PNP

Silicon PNP transistor in a SOT-23 Plastic Package.


特点 / Features

Low current, high voltage.


应用 / Applications

Telephony and professional communication equipment.

等效电路 / Equivalent Circuit



引脚 / Pinning



PIN1 Base

PIN 2 Emitter

PIN 3 Collector


参数范围、HFE 分类及标记 / h_{FE} Classifications & Marking

h_{FE} Range	>50
Marking	H1W


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-300	V
Collector to Emitter Voltage	V_{CEO}	-300	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-50	mA
Peak Collector Current - Continuous	I_{CM}	-100	mA
Base Current	I_B	-50	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -100\mu A$ $I_E = 0$	-300			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -1.0mA$ $I_B = 0$	-300			V


Electrical Characteristic Curve

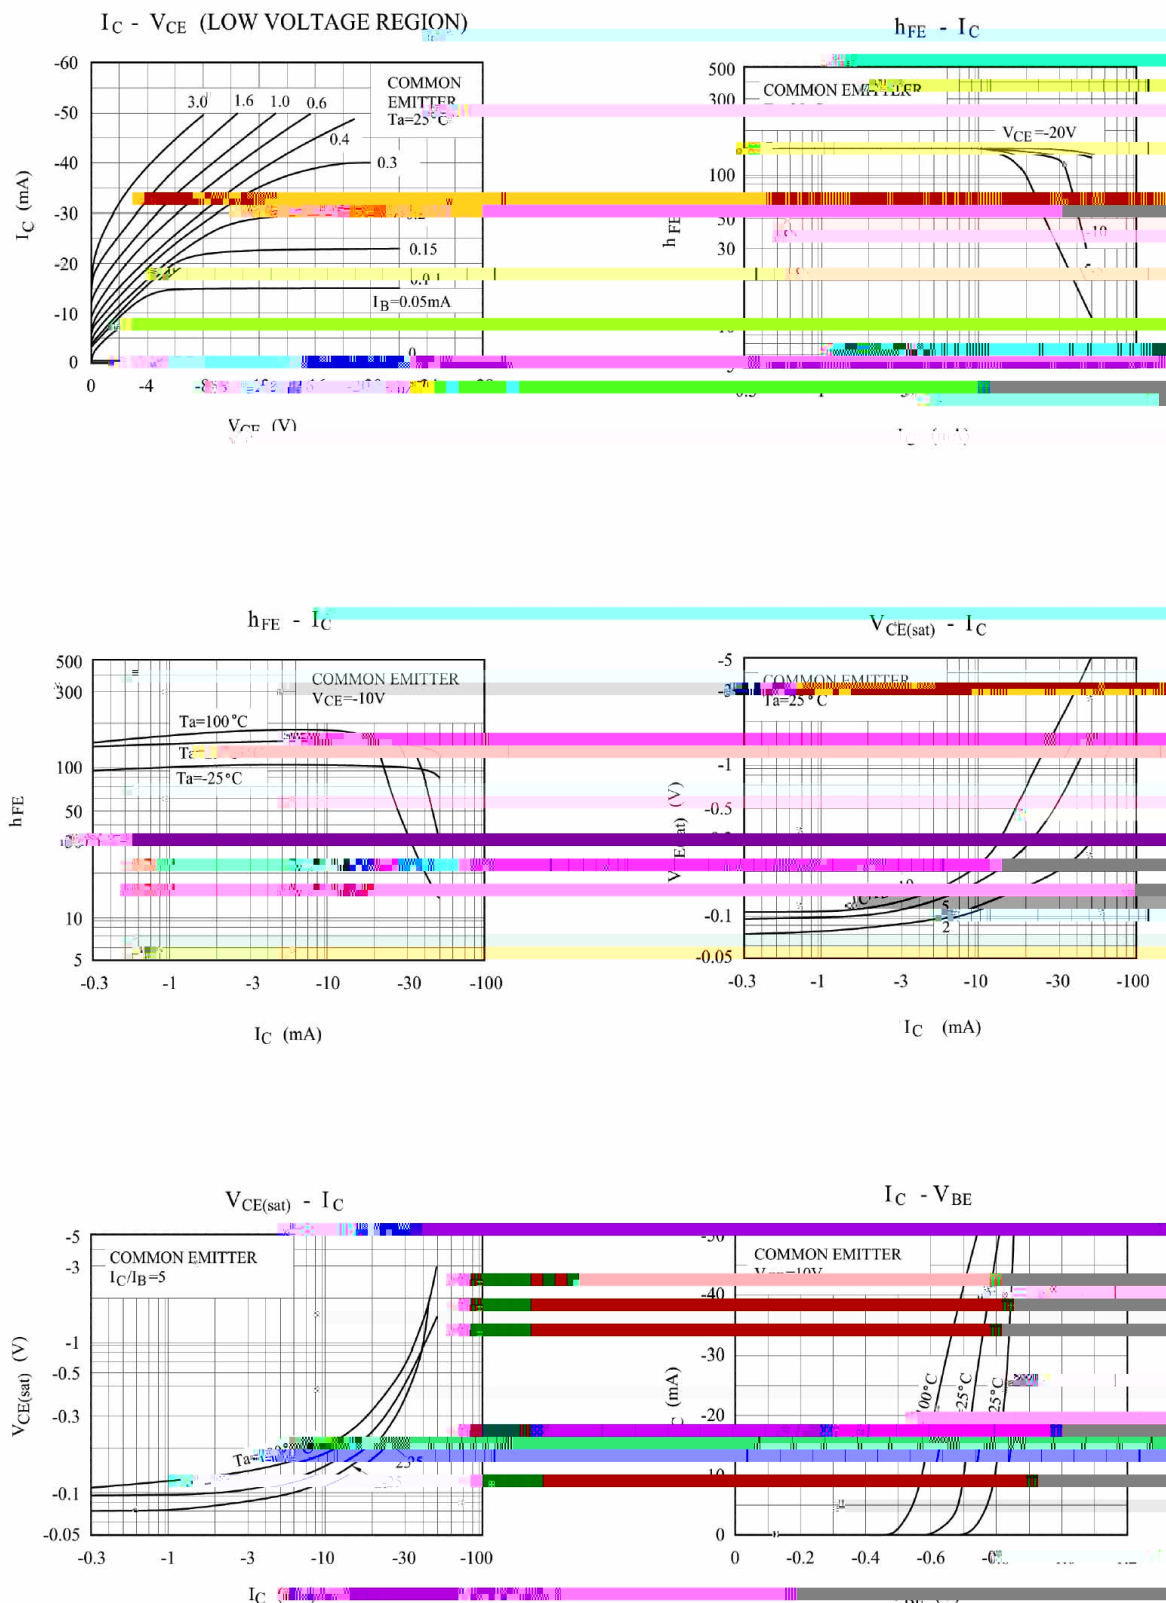

⌘ È Ò Ì ð / Package Dimensions

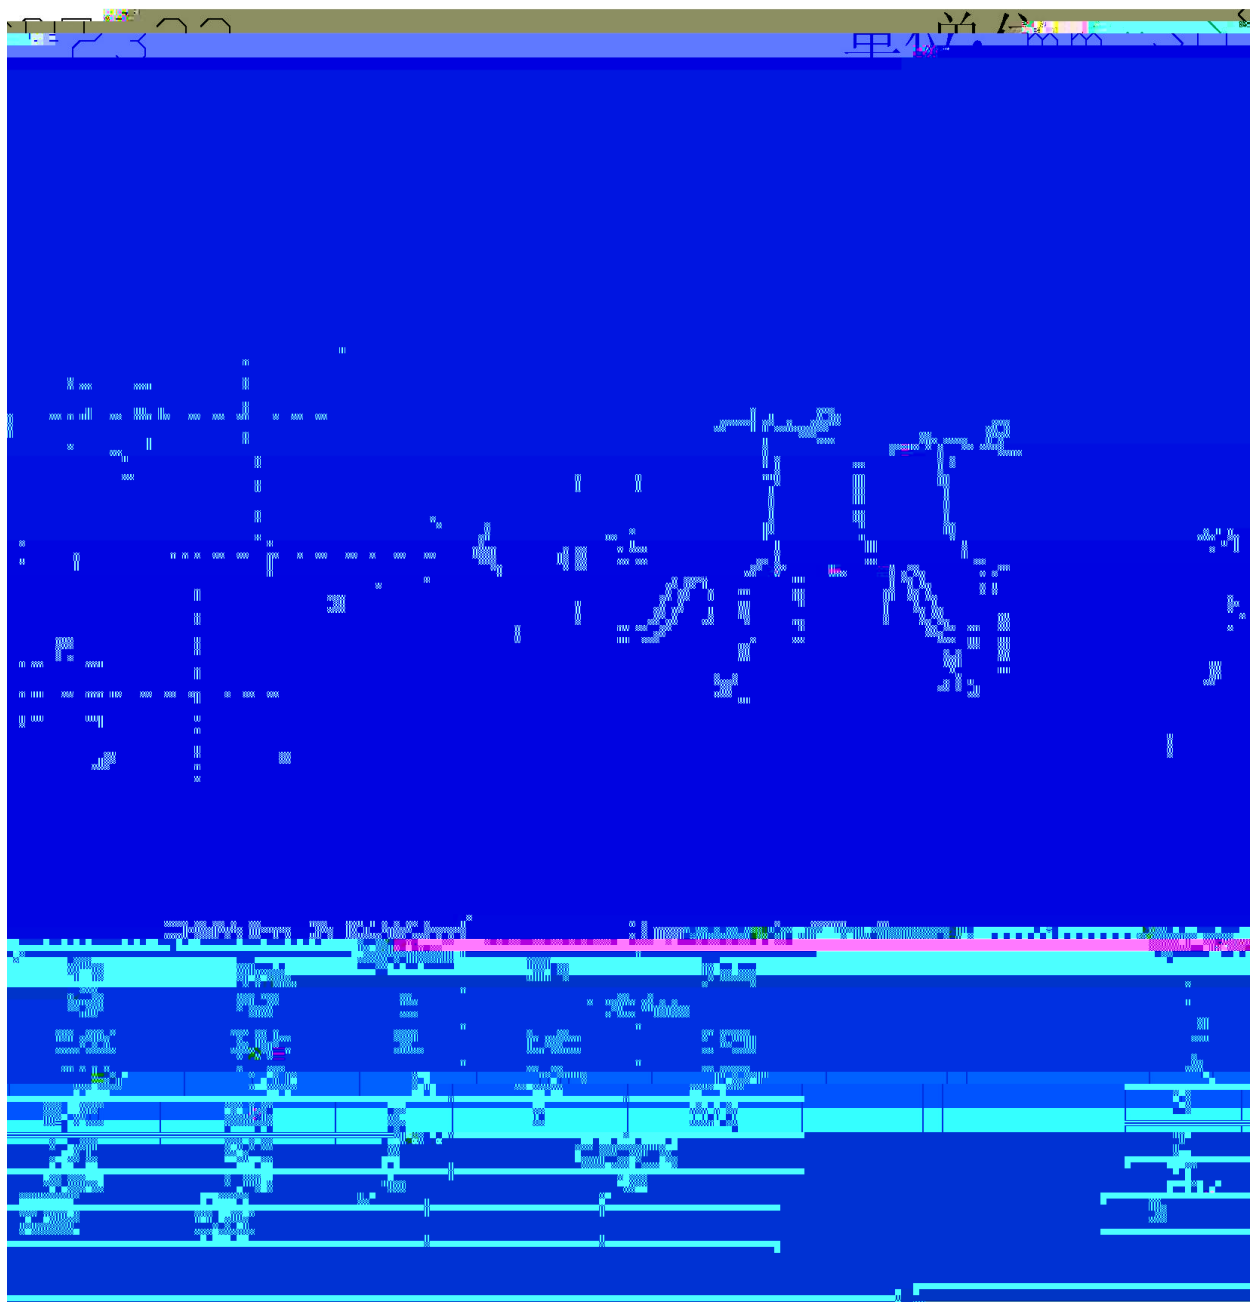

4. 1W / Marking Instructions

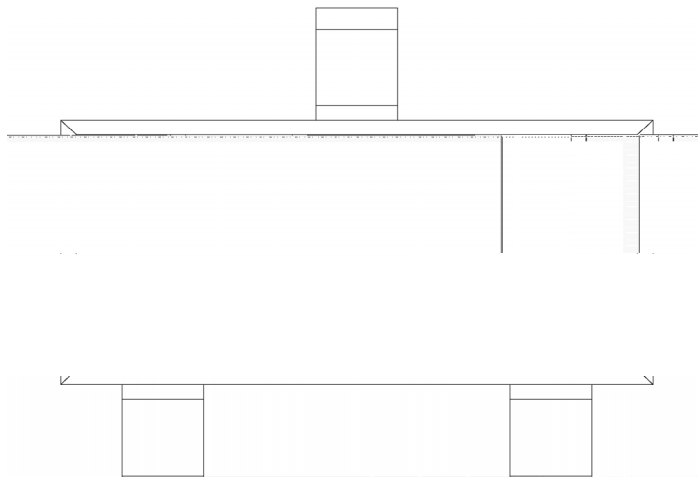

H


1W

Note:

H: Company Code.



Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

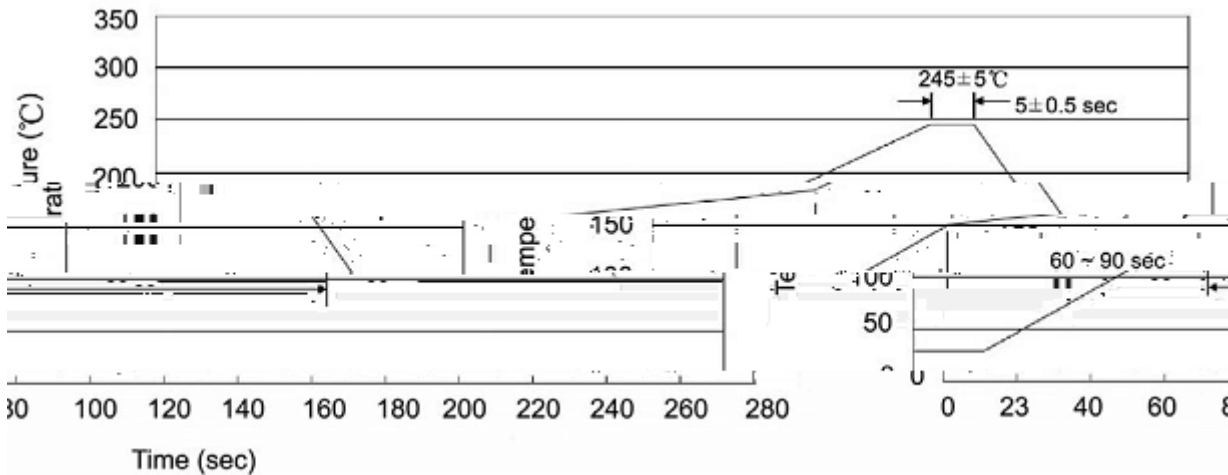

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

Notices