SOT-23 Ь N ঌ MOS ㄱ
N-CHANNEL MOSFET in a SOT-23 Plastic Package.

46(38 08)re f52.94 799tc [< Tm -.0005 Tc [(SOT)55.67(a 6])-5.4(02K2)]523 0 48a406aa>

Parameter	Symbol	Rating	Unit

Parameter	Symbol

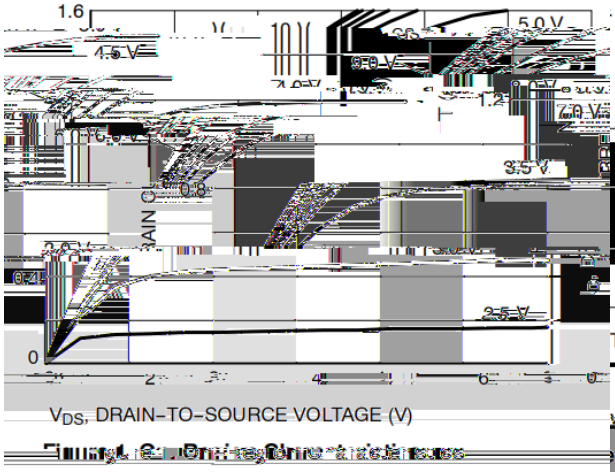

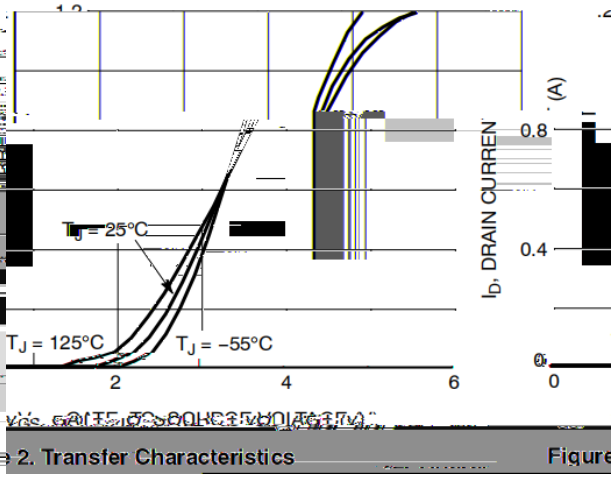

2. Transfer Characteristics

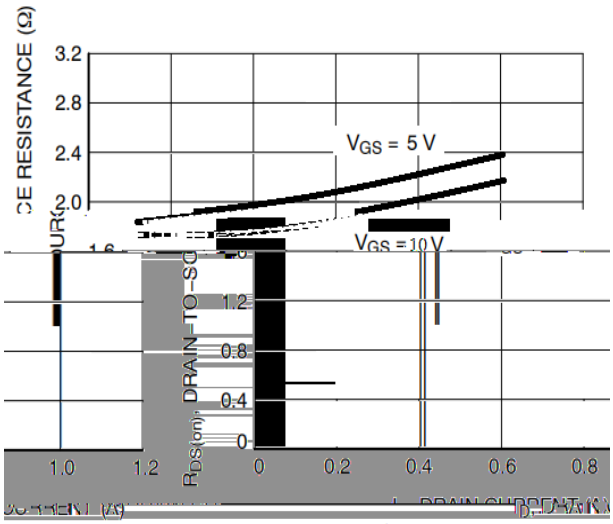

ce vs. Drain Current and

Figure 3. On−Resistan

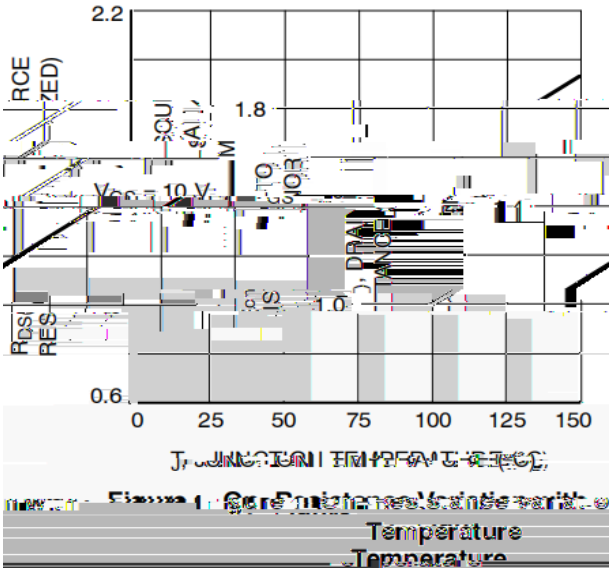

Temperature

Temperature

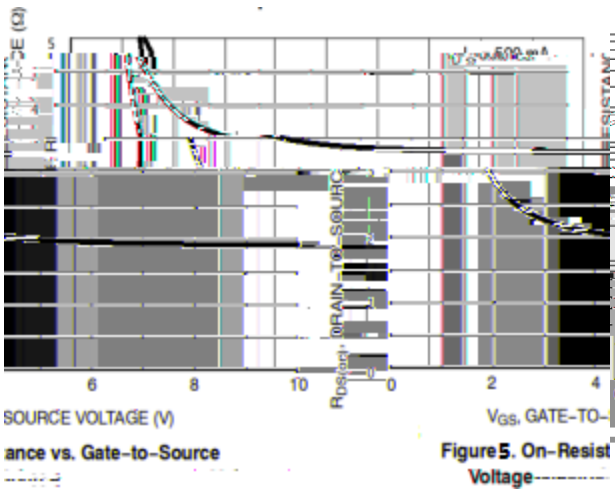

ance vs. Gate−to−Source

Figure 5. On−Resist

Voltage

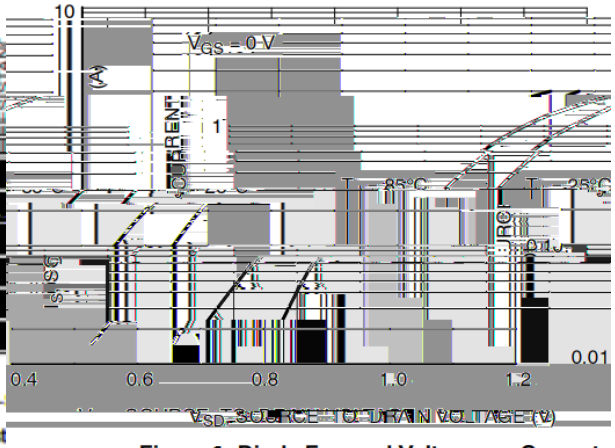

Figure 6 Diode Forward Voltage vs. Current

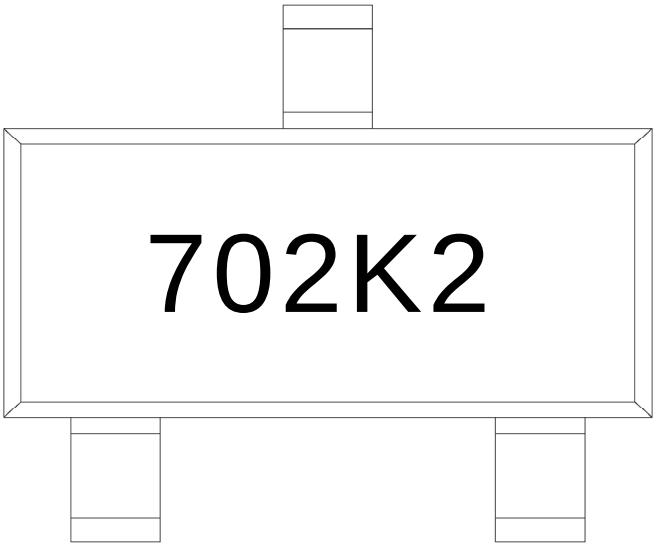

ب χ

702K2 χ .

Note:

702K2: Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

ب χ

1 أ 150 180 ژ 60