



BR2SD1899Q

BR2SD1899Q

TO-252 NPN ! " # \$ % & ' () * + , - . / 0 - f_T 1 - % 2 3 4 0 5 6 - 7 8 9 : ; - < = AEC-Q101 > ? 1 @ A 6 B C - D E F G ' H I J . K L M . N O 1 9 P Q . N O 0 . / 7 8 . N - R S T U V H 3 W X B C ' Y



Y


Y

Y


/ h_{FE} Classifications & Marking

参数	符号	数值	单位

/ Electrical Characteristic Curve

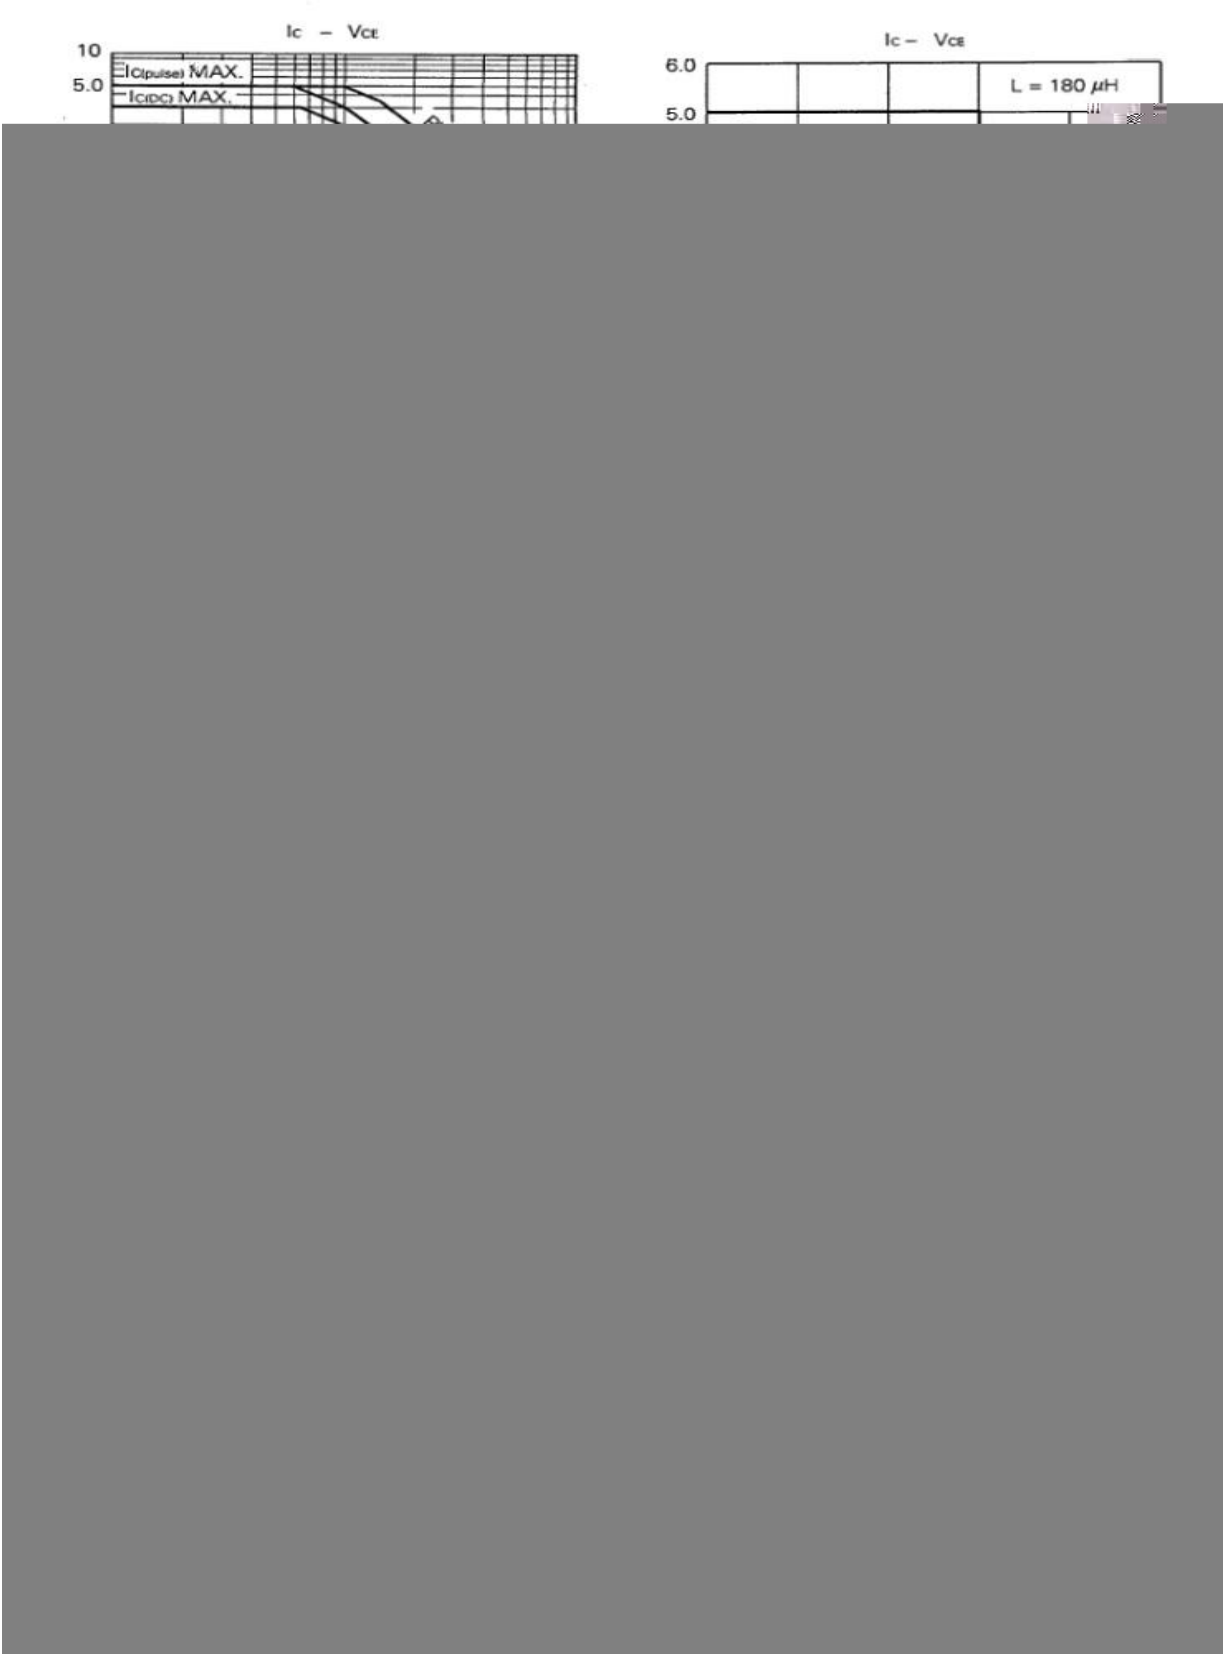

/ Package Dimensions

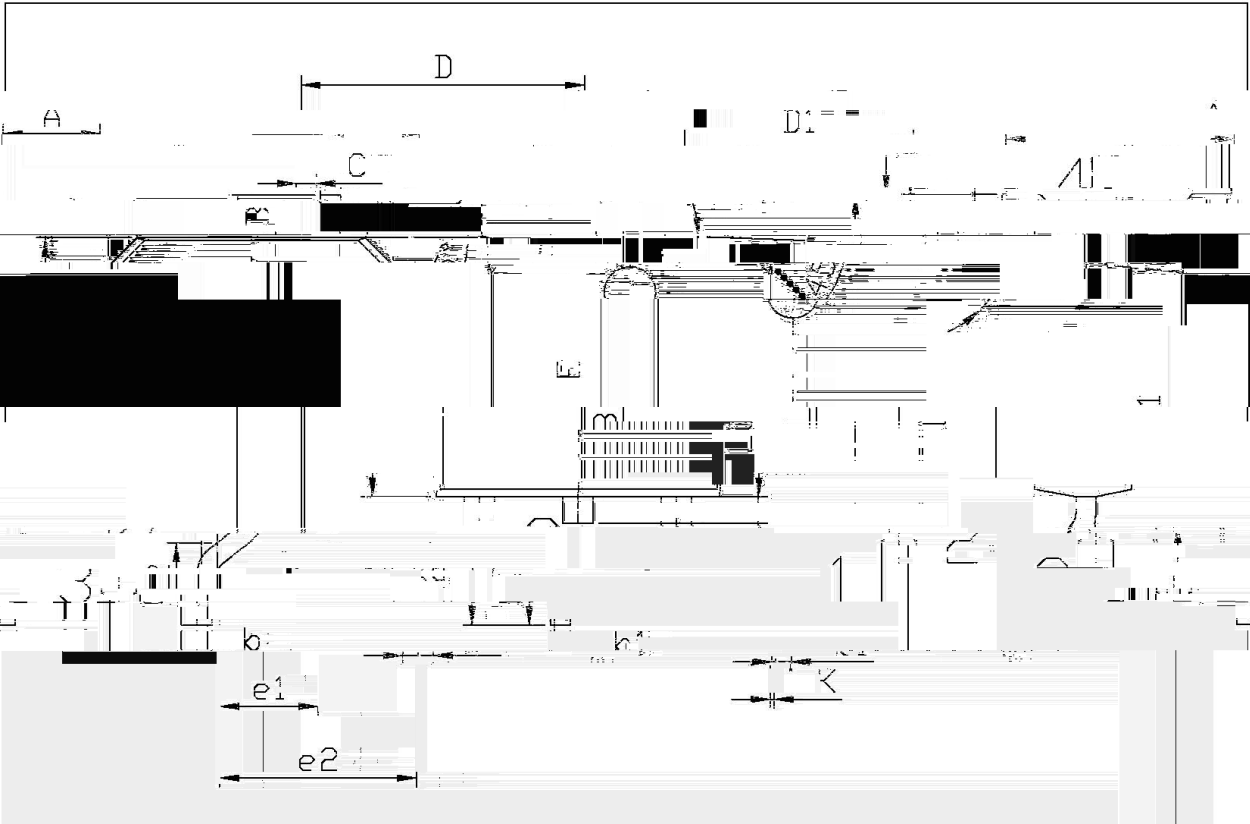



单位: mm

Dimensions in Millimeters			Dimensions in Millimeters		
Min	Max		Min	Max	
5.00	5.25		0.20	0.40	
4.43	4.73		0.70	0.90	
0.85	1.15		0.45	0.75	

C	0.45	0.55	L2	1.70	2.30
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

T0-252


/ Marking Instructions

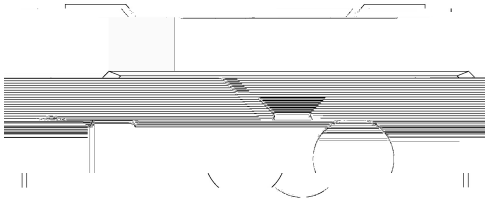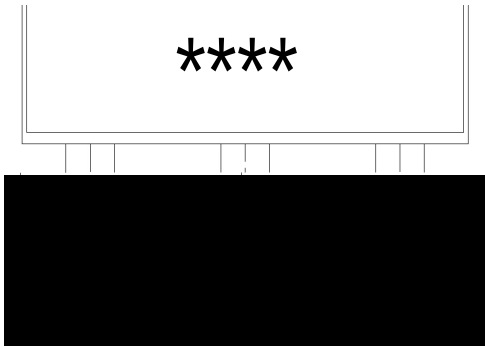

899

M:

() /

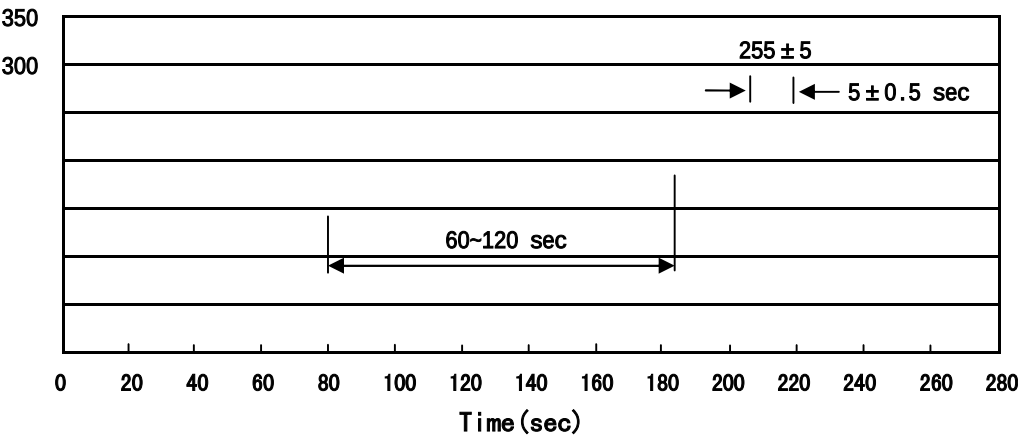

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

	Units/Reel 只/卷	Reels/Inner Box 卷/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

	Units/Tube 只/套	Tubes/Inner Box 套/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices