

BR4N60

ММ Ё ѿ Ъ ѿ Z 1

Н ѳ U/Н г ѿ ѳ к/Ăн ѿ ѿ ѿ

ĤĤ ѿ ѿ ѿ GF2GF ѿ ѿ ѿ ѿ ѿ ѿ ѿ


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_N	V_{GS}	D



/ Electrical Characteristics(Ta=25)

V_{DS}	I_N	$I_{D(on)}$	V_{GS}	$V_{DS(on)}$	$V_{GS(on)}$	D
		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				


/ Electrical Characteristic Curve

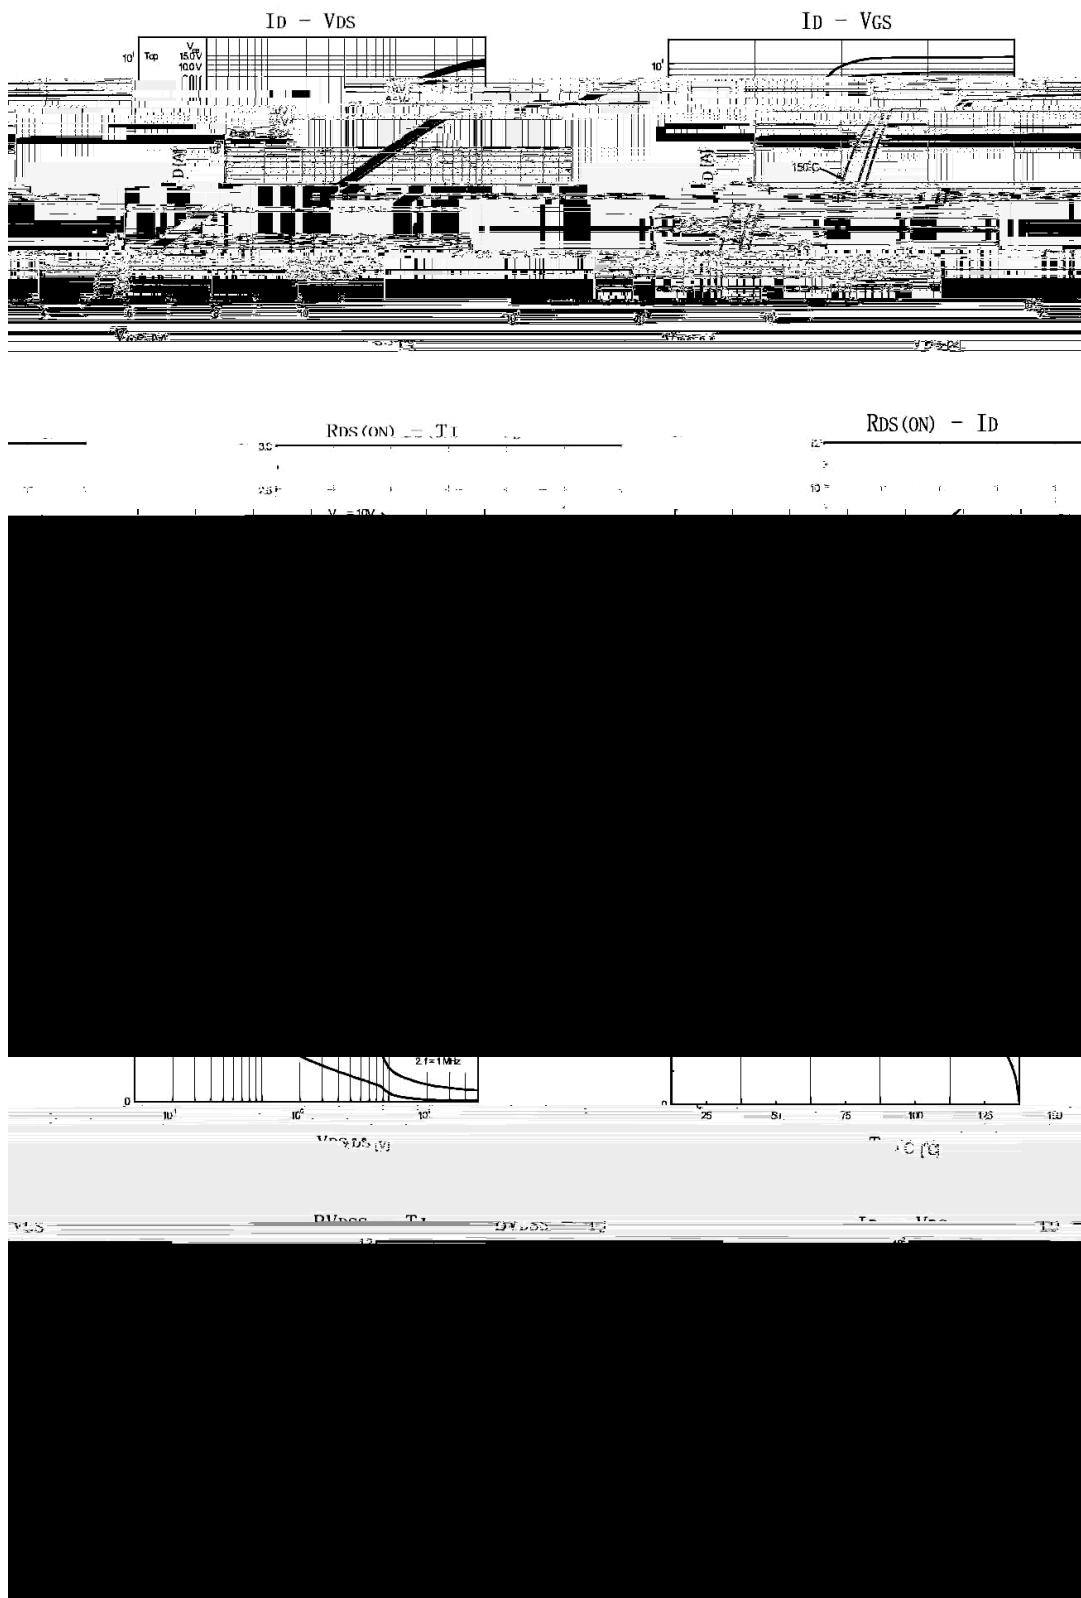


/ Package Dimensions

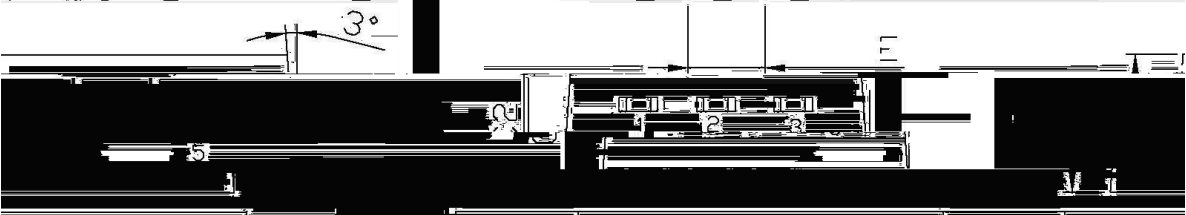

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
D	2.56	2.64	E	6.3	6.7
F	15.7	16.1	G	9.0	9.4
H	1.25	1.35	I	1.25	1.35
J	1.25	1.35	K	1.25	1.35
L	1.25	1.35	M	1.25	1.35
N	1.25	1.35	O	1.25	1.35
P	1.25	1.35	Q	1.25	1.35
R	1.25	1.35	S	1.25	1.35
T	1.25	1.35	U	1.25	1.35
V	1.25	1.35	W	1.25	1.35
X	1.25	1.35	Y	1.25	1.35
Z	1.25	1.35			

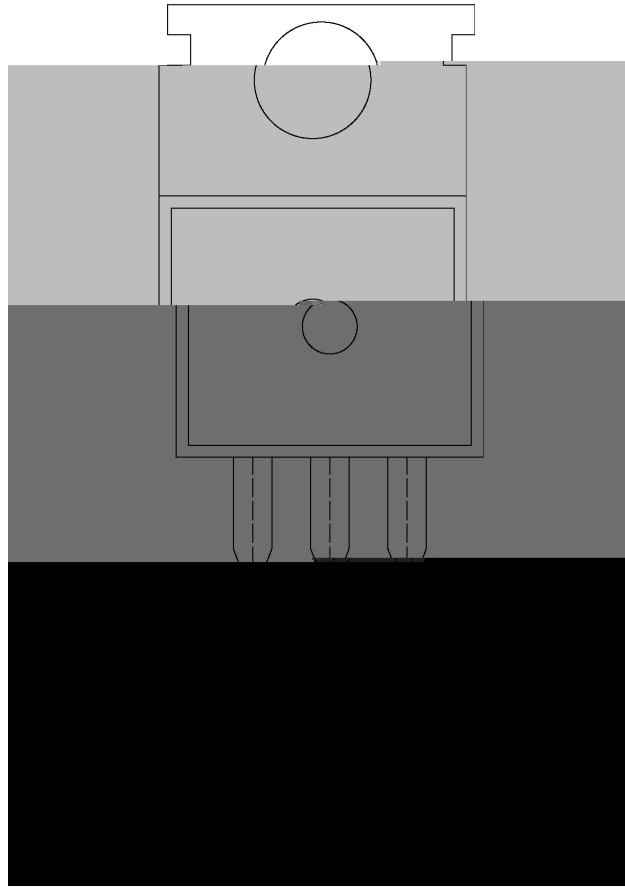

() / Temperature Profile for Dip Soldering(Pb-Free)

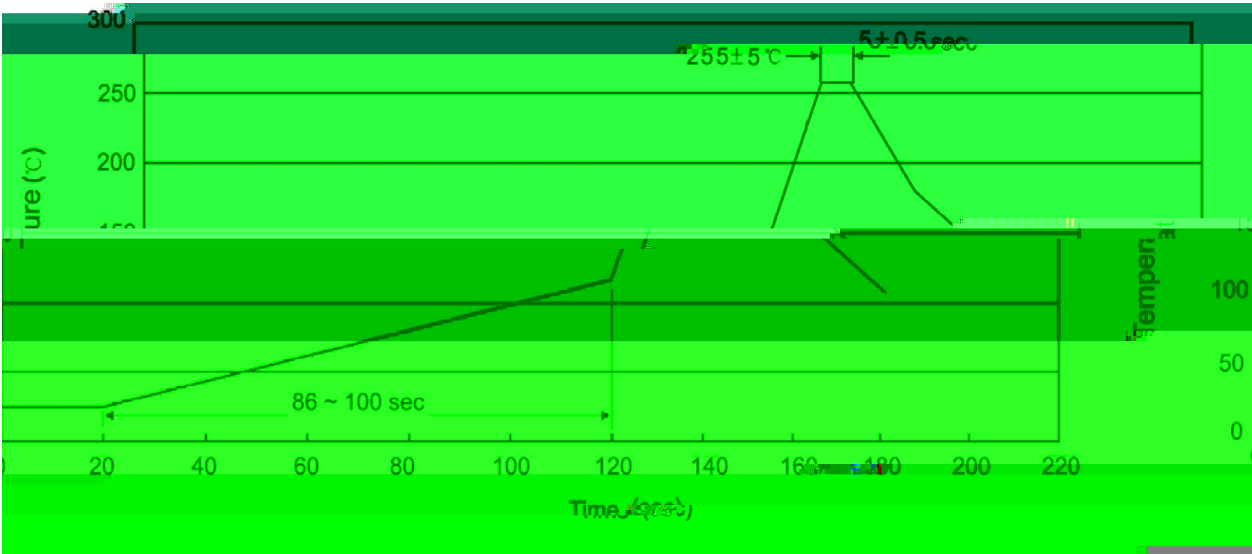

℃ ×