



EUDG9888DP I VRW5609 t 2 i SZ P 5 1 DF0GF
I

- ◆ ا د | ءِ ψ
◆ ا ψ
◆ . w ئِ H ل ψ
◆ Λ H ψ
◆ x g i w ئِ ψ
◆ ψ
◆ د 98NK} ل ψ
◆ د كُ ψ
◆ ج د ص | ئِ ψ
◆ ل ص | ئِ ψ
◆ YGG ص | ئِ ψ
◆ ح | ئِ ε XYOR ζ ψ
◆ - ل ψ

DF0GF SF \$ √ L بېگي اَ





Siq Qx p ee u

Siq Qd p e

ب ٲ

Siq Gevfuiswir q

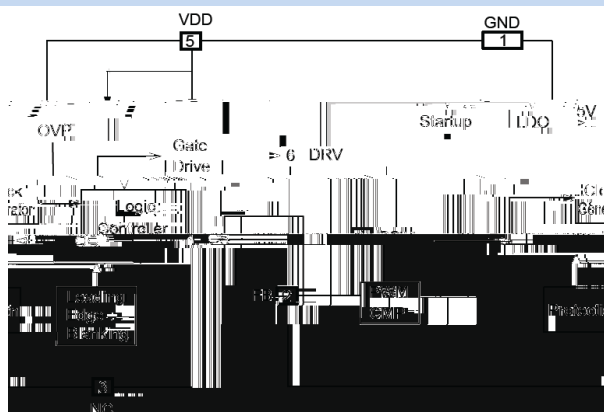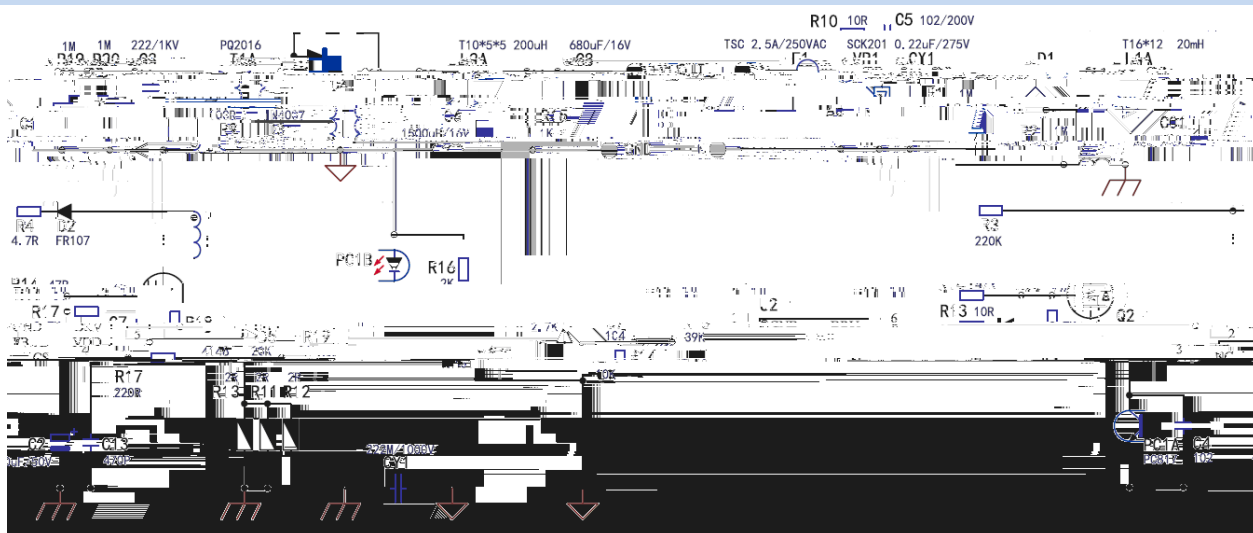

/Parameter	Value	Unit
VDD	-0.3-28	V
FB	-0.3-6	V
DRV	-0.3-15	V
CS	-0.3-6	V
	-40-125	
	-65-150	

Parameter I	Symbol	Test Conditions : T	Min	Typ E	Max	Unit H
I_ST		VDD_ON-1V		3	20	uA
VTH_ON		VDD i	15.5	16.5	VDD5	V
VTH_OFF	5	VDD i U	7	8		

EUDG9888DP I ا ئ SZ P آ د ت د ه م
ا ف ي ا ج
EUDG9888DP I ا = ئ ا ئ ل ص د ص و
YGG چ ا ئ YGGص چ ا ئ
EUDG9888DP I ب ث ع ه و ذ ق ز س د ا ئ ن پ ت ر د
98NK} ل ق د ف ح ه ل SIP و ه ا د ق
د ن م ت ل ك
EUDG9888DP I ر ئ H ل ح م ا ن l w a ب و ه
ر ا د - ل ا ل
EUDG9888DP I ب VRW5609 E ا ل A H ا ا خ Y م ا
ف ي W ج ء گ , ا ئ Oeye09 ` ئ Hxu513

YGG ر ا ل ي گ ص YGG

[illegible]

EUDG9888DP ا ب ج د ه و ز ح ط ق ك غ ف ع

HPL ي H آ



EUDG9888DP I FF P 98NK}1 HPL ص ٥

EUDG9888DP I ا ب د ا ؤ إ E الله ج هـ د آ م

[illegible]

EUDG9888DP | ج | شج | ص ب | أ | ا | ٢ | ٦ | ٥ | ٤ | ٣ | ٢ | ١

EUDG9888DP I = اَ اِ اُ ح ل ص ذ

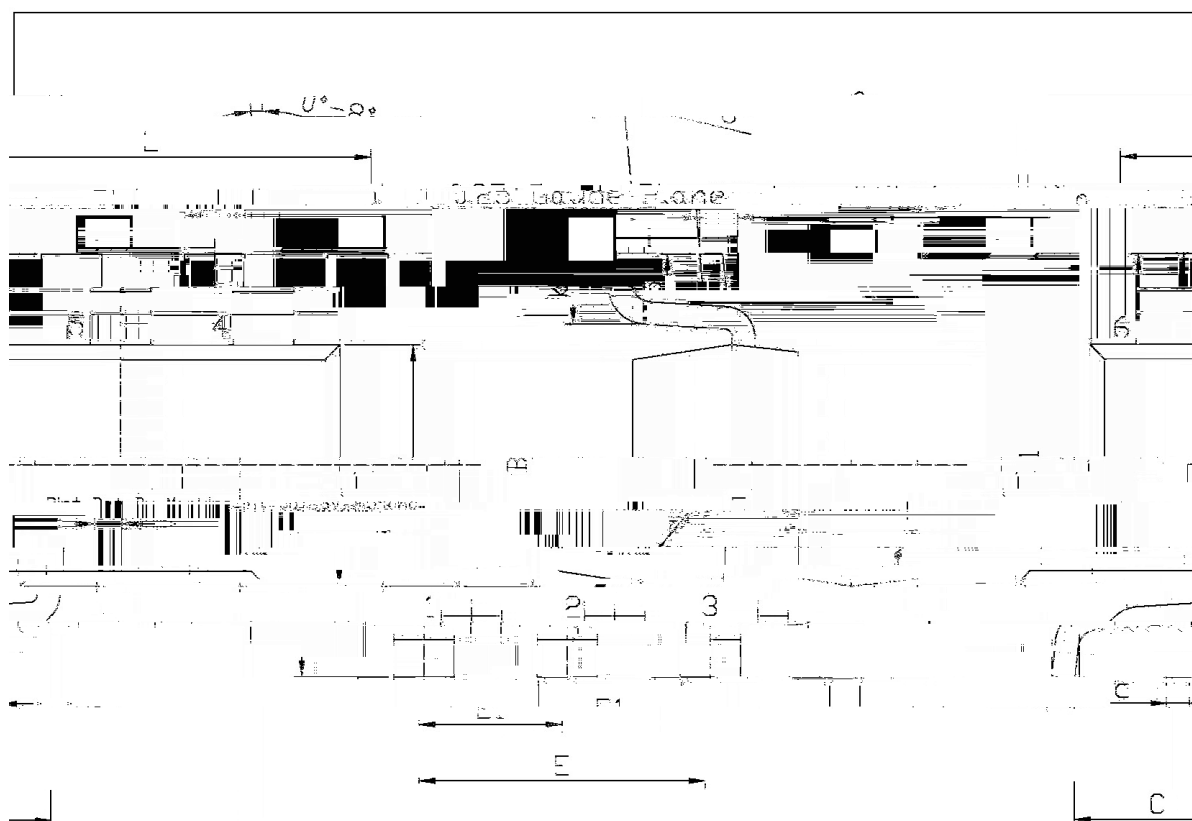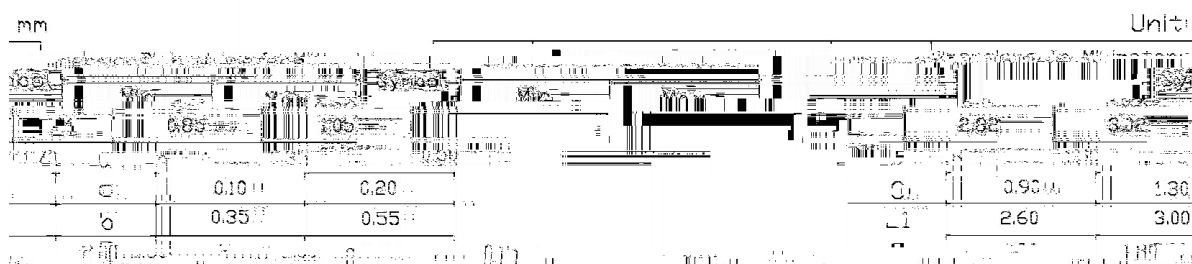

5

SOT23-7



9888D

9888D

Note:


9888D:

****:

Product Type.

Lot No. Code, code change with Lot No.

Temperature Profile for IR Reflow Soldering(Pb-Free)

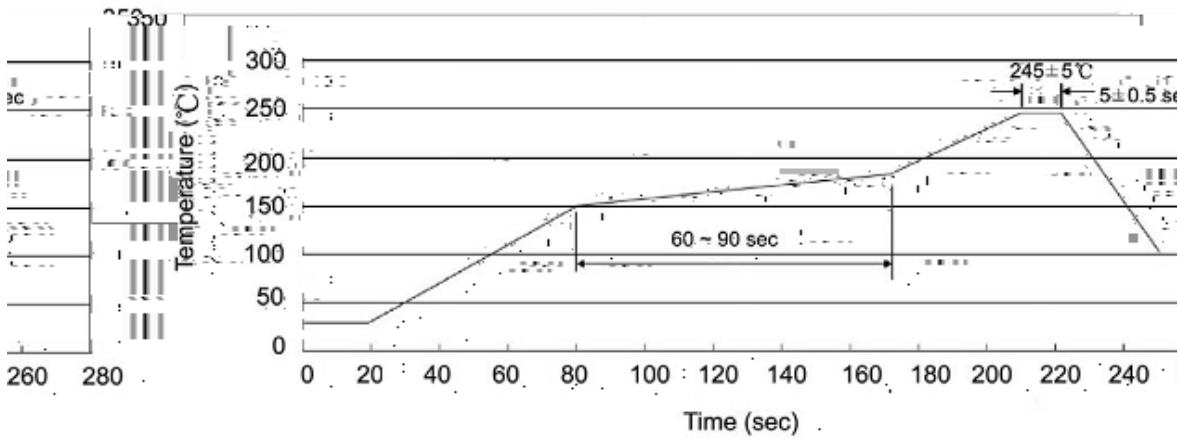

- 1

150 180

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10

/sec.
- Note:
1.Preheating:150~180 , Time:60~90sec.
2.Peak Temp.:245±5 , Duration:5±0.5sec.
3. Cooling Speed: 2~10 /sec.

±5 ±1 sec. Temp.:260±5 Time:10±1 sec

REEL

Sdfndge W se t	Xqiw t					Gipeqvirq t +xqiwx p p ⁶ ,		
	Xqiiv2Uee0 2	Ueeiv2Lqqeu Er{ 2	Xqiiv2Lqqeu Er{ 2	qqeu Er{ev2Rxweu Er 2	Xqiiv2Rxweu Er{ 2	Uee0	Lqqeu Er{	Rxiweu Er{
VRW560829	6/333	43	63/333	7	453/333	: × ;	543×538×538	778×563×768