


VRW5606 ΜΜΕ Η я Τ ɨ ό Ч я ʜ
Low dropout linear regulator in a SOT23-3 Plastic Package.

Η ı ă ı Η я Τ ı □ ў Ч ɯ Ѭ ņ ı ≍ ђ Ъ ɔ я ˡ ђ 57Y ı ˝ õ ɔ ╚ 4⅛ƤD ı ђ, ɔ я ч ў χ ° 5 (ı ч ᵀ DHF0T433 ‰ ´ ≍ ˡ ، ό ļ ∂ ı ņ ғ β
Low power consumption,Low voltage drop,Small temperature drift coefficient,High input voltage up to 24V,The static current 1.5ƤA,The output voltage accuracy÷ ° 5 (,Qualified to AEC-Q100 Standards for High Reliability, HF Product.

ᵻ R ɻ ɔ ◊ Ф ᵵ ı ᵑ ʒ Ф ᵵ ı _ ļ ⁼ ð ļ Ф ᵵ ı ◗ ’ ∩ ᶎ Ƶ ᵻ ⊠ Ⱨ ļ ∂
For use in power equipment,Communication equipment,Audio and video equipment, Meet the stringent requirements of automotive applications.

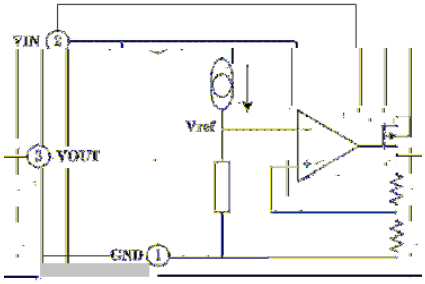

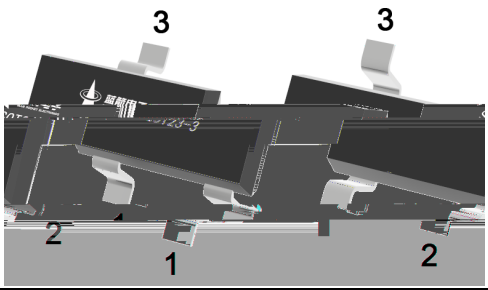




Ậ ő	ᵋ Ч	ı ǐ	Ậ ő	ᵋ Ч	ı ǐ
1	GND µ €	ɔ ◊ ş	3	VIN	ɔ я ђ Ъ ч

Typical Application Circuit


g Ẓ ŧ / Basic Application

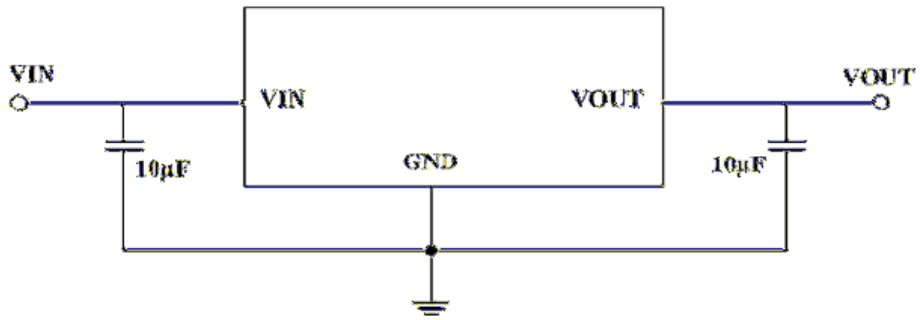


ڑ ڛ ɔ ╚ ɔ я ɔ ` н / High Output Current Voltage Regulator




˜ ت ʒ ǐ Ẓ ŧ / Short-Circuit Protection

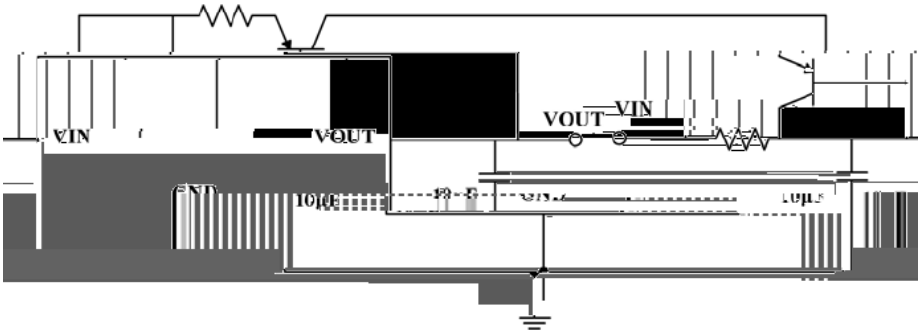

⍰)¢ / Package Dimensions

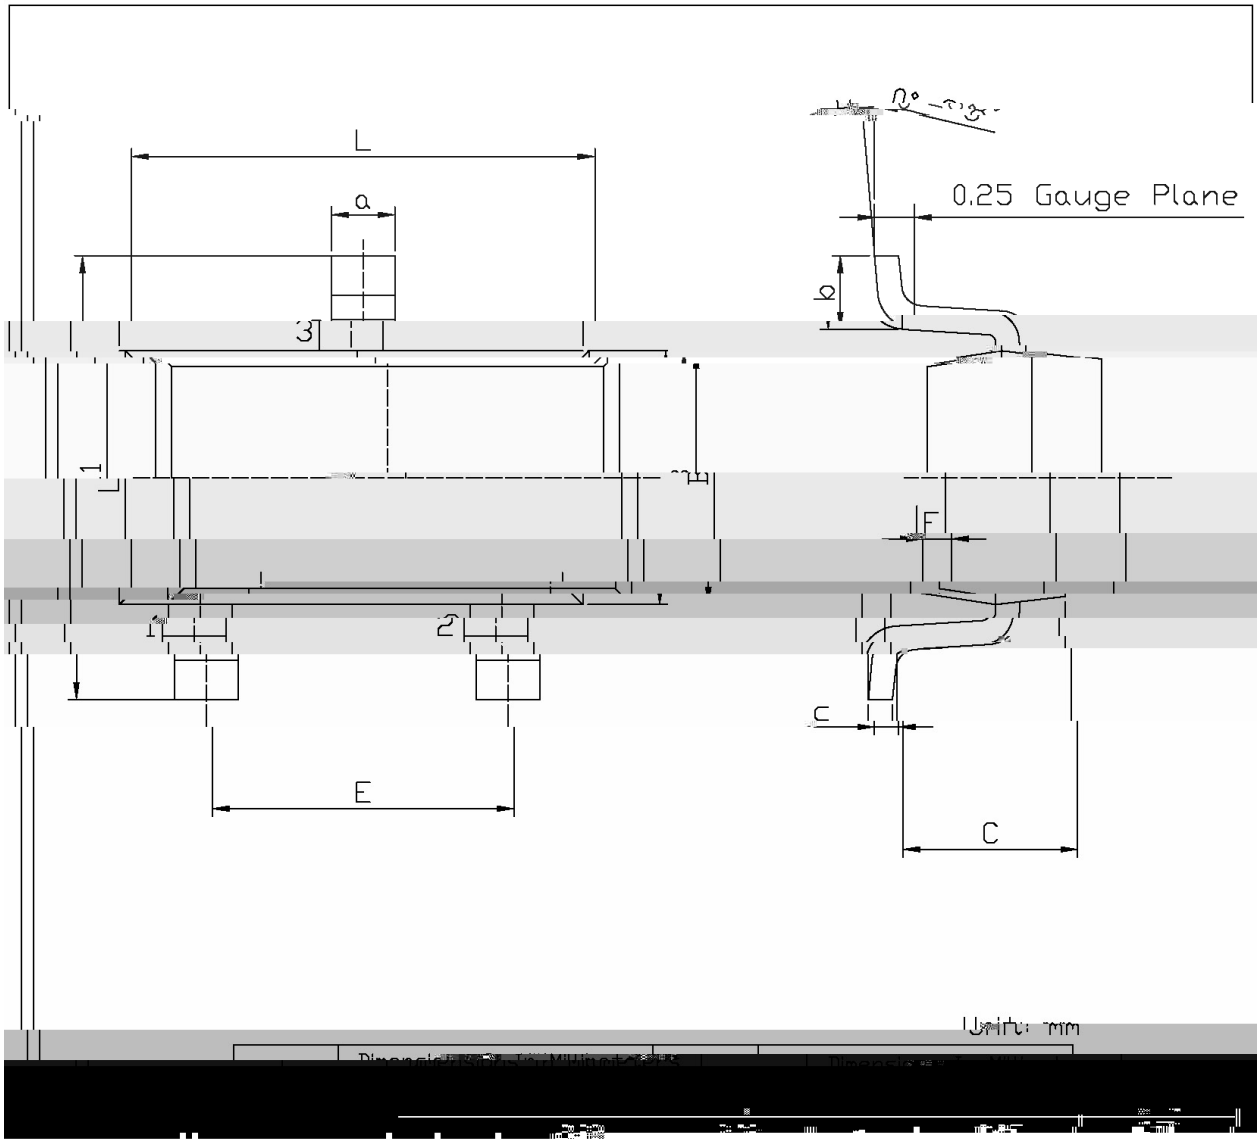

,My*ƒ* / Marking Instructions

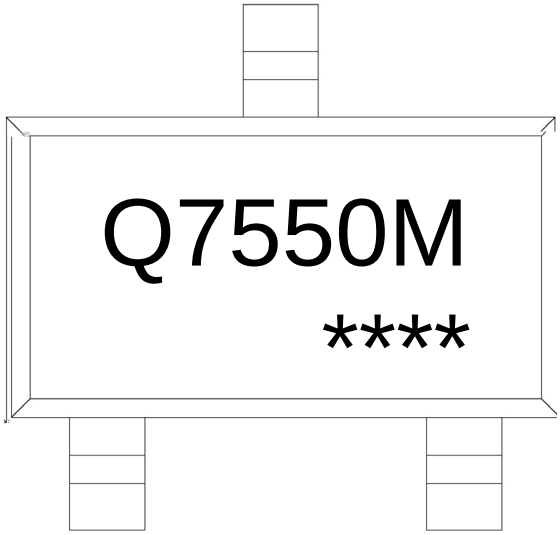

ᴗ ˝ χ

T χ	ᵻᵡ ∩ ᶜ ṇ ᶠ ᵝ ‰ ᵡ
7550M χ	ᵻᵡ ʒ ᴺ Ꮁ
---- χ	ᵻᵡ ᵻ ᶠ ᵑ̈ ᴺ Ꮁ ᵻ ₶ ᵻ ᶠ ᵑ̈ ᴺ Ψ ᖘ

Note:

Q:	Automobile halogen-free product Code
7550M:	Product Type Code
****:	Lot No. Code, code change with Lot No

ŠWDtž. (x/) / KP0RKPD0TM6HK

ب ˝ χ

1 Ĺ♬ □ ẙ 150 Ḱ 200 ł ı `H ڑ 60 Ḱ 120sec;

2 Š Ö □ ẙ 255 ° 5 ł ı `H ڑ 'Y ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ﾘ ¸ ɔ ﾙ ẙ ㎞ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:150~200 ł , Time:60~120sec.

2.Peak Temp.:255 ° 5 ł , Duration:5 ° 0.5sec.

3.Cooling Speed: 2~10 ł /sec.

Â/Cã] / Resistance to Soldering Heat Test Conditions

□ ẙ χ 260 ° 5 ł	`H ڑ χ 10 ° 1 sec.	Temp.:260±5	Time:10±1 sec

GPá / Packaging SPEC.

ი ` ﾔ Ł / REEL