

/ Descriptions


/ Features

$\leq$ q q


$\leq$ q q

/ Applications

/ Equivalent Circuit



/ Pinning

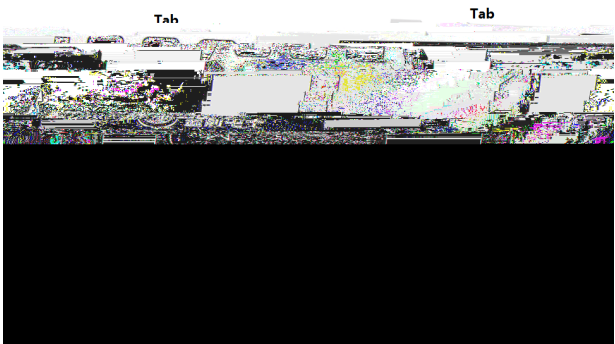

/ Marking

		±	
	θ		
	θ		

θ ε θ θ

		ε				
						ε
					±	
		ε				
						q


ε

/ Electrical Characteristics(Ta=25)



		q q				




/ Electrical Characteristic Curve

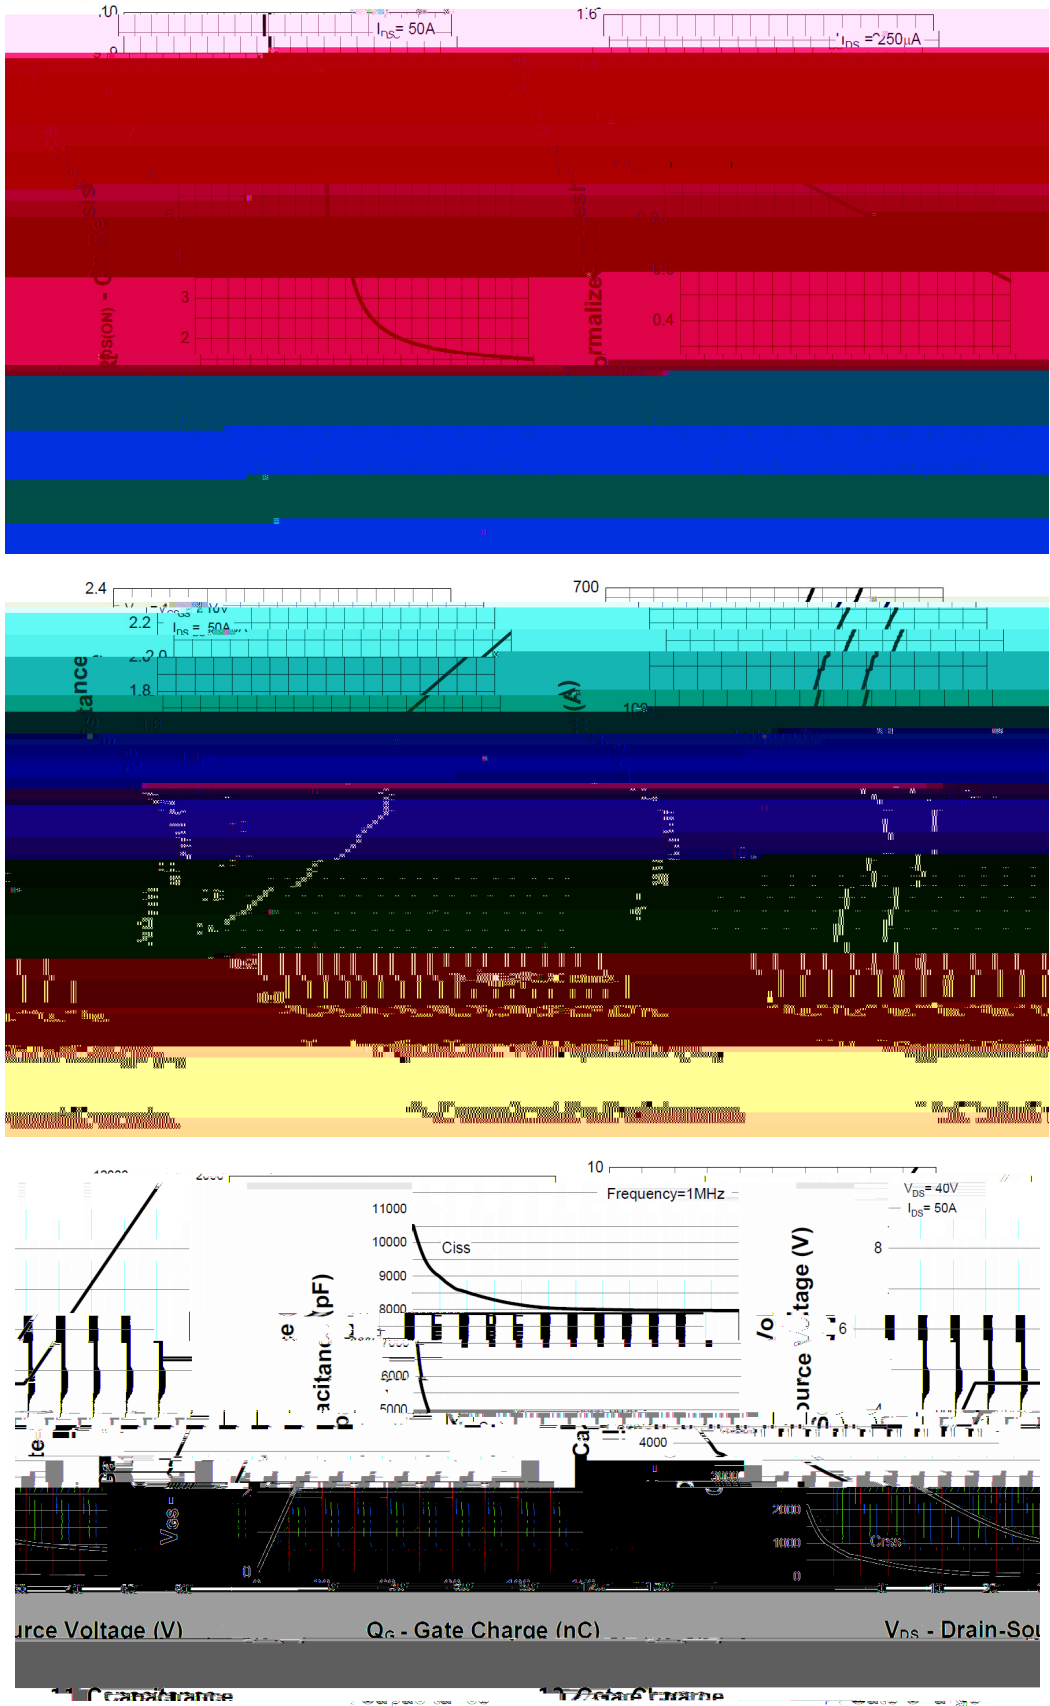


/ Package Dimensions

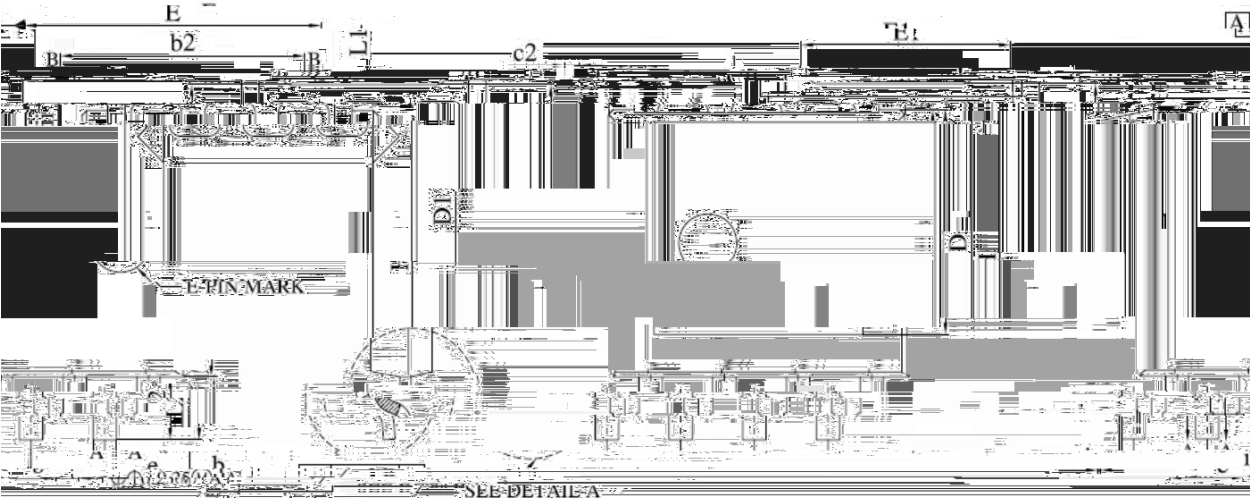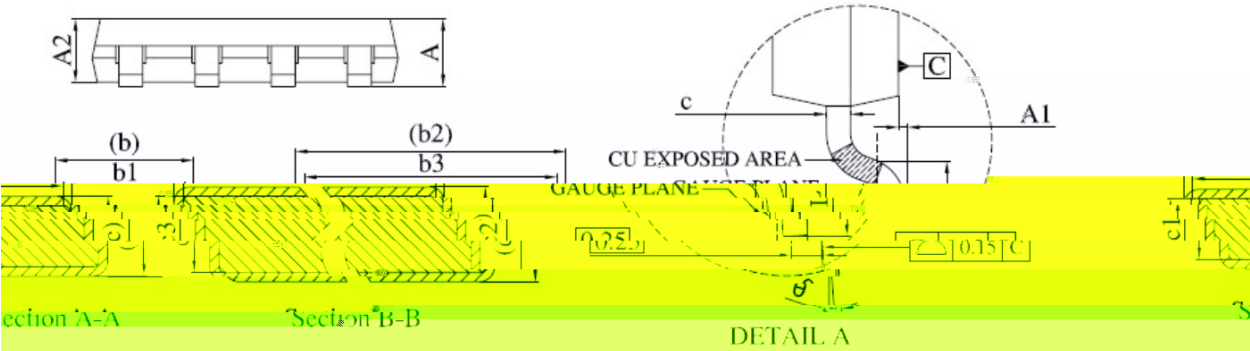

Dimensions in Millimeters				Dimensions in Millimeters			
Symbol	MIN.	MAX.		Symbol	MIN.	MAX.	
A	1.00	1.30		E	4.95	5.30	
A1	0.00	0.15		E1	3.50	3.70	
A2	0.98	1.12		e	1.27 BSC.		
b	0.35	0.50		H	5.95	6.25	
b1	0.32	0.46		;		0.25	

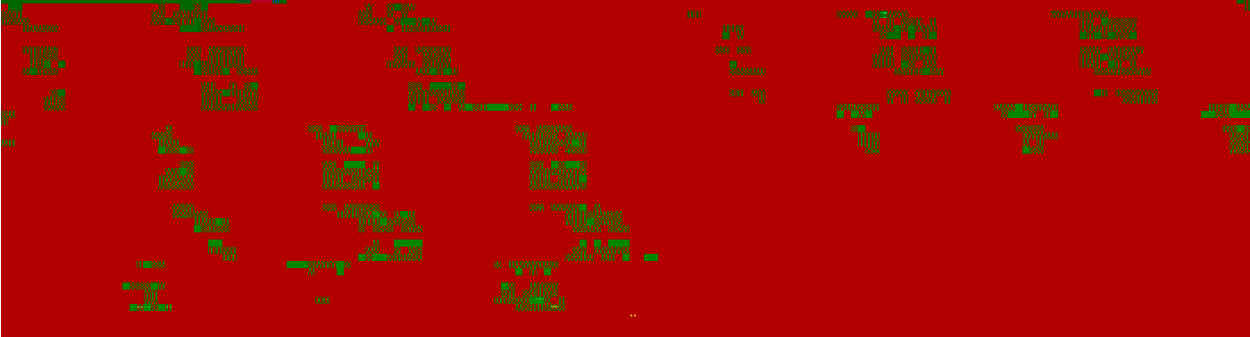


/ Marking Instructions

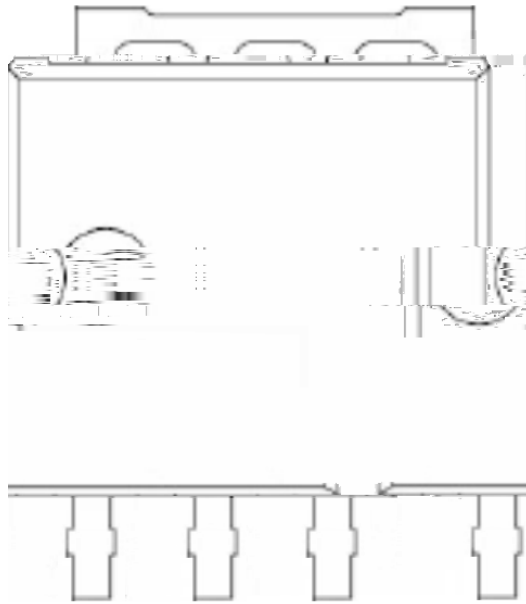

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

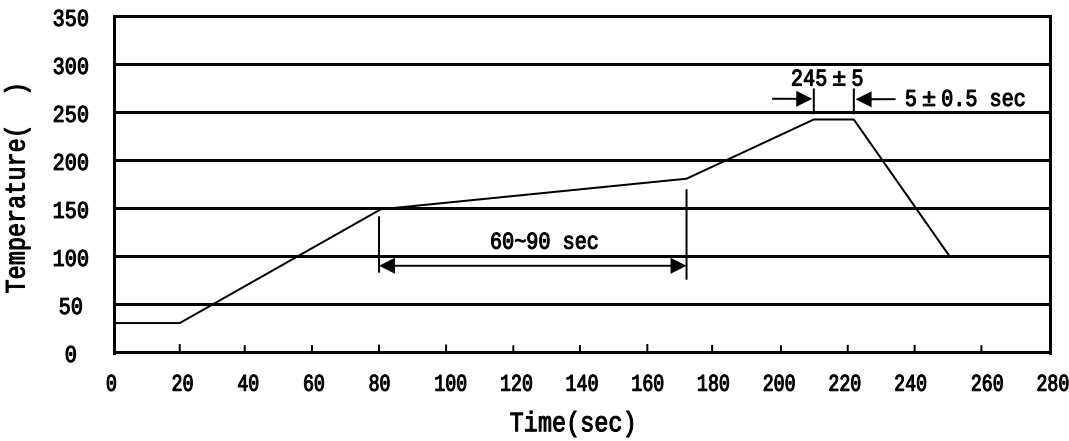

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

/ Notices