

BRCS030N03DP



ATA SHEET

TO-252 N MOS

BRCS030N03DP




ATA SHEET

/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

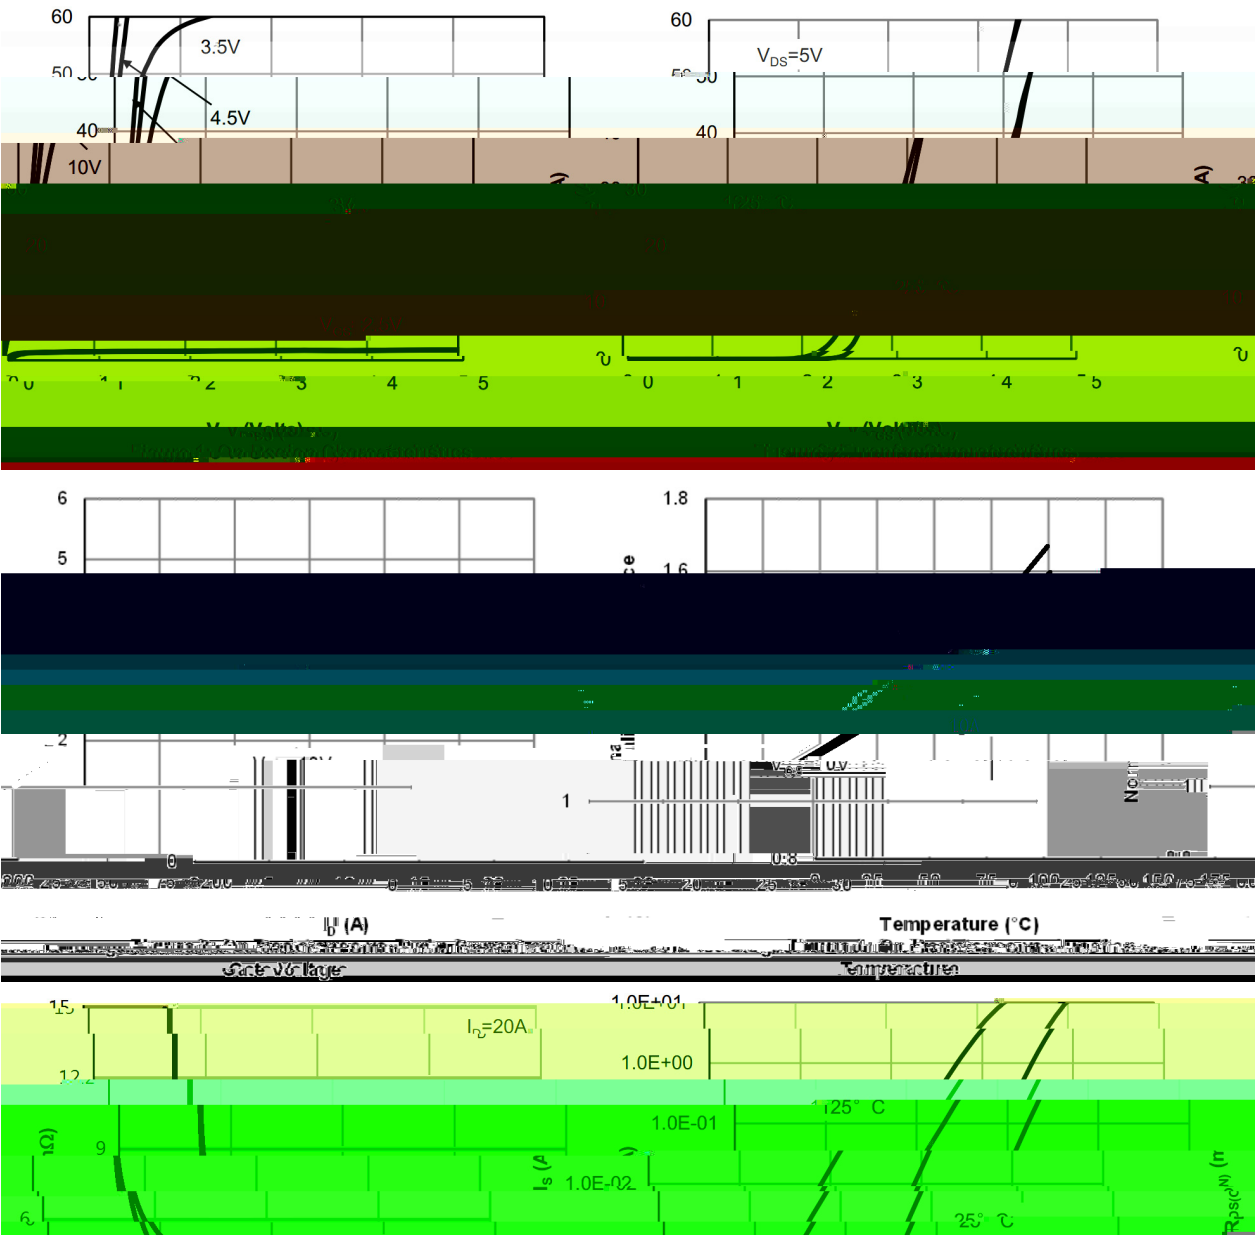

/ Electrical Characteristic Curve

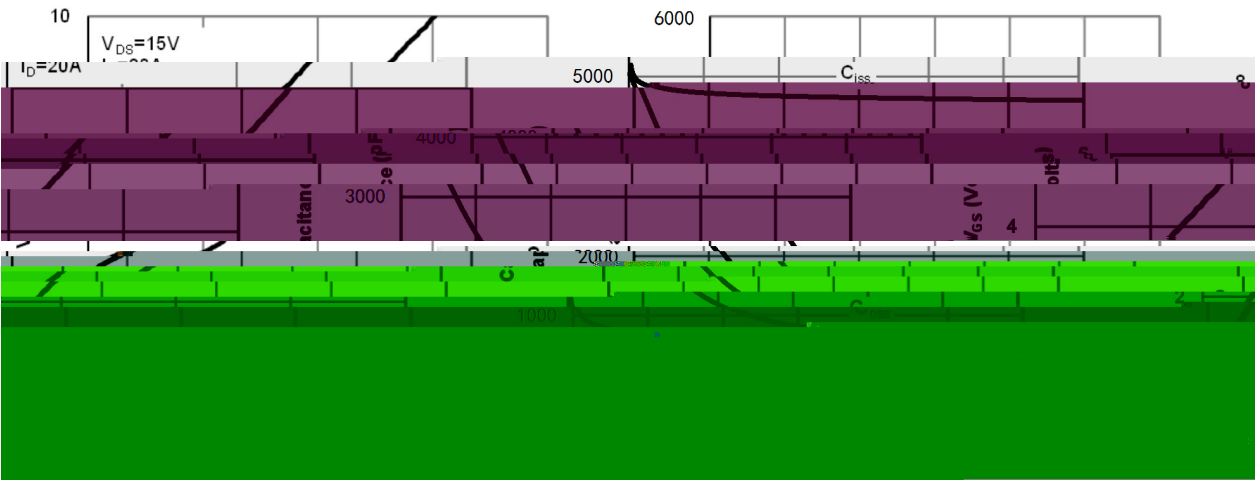
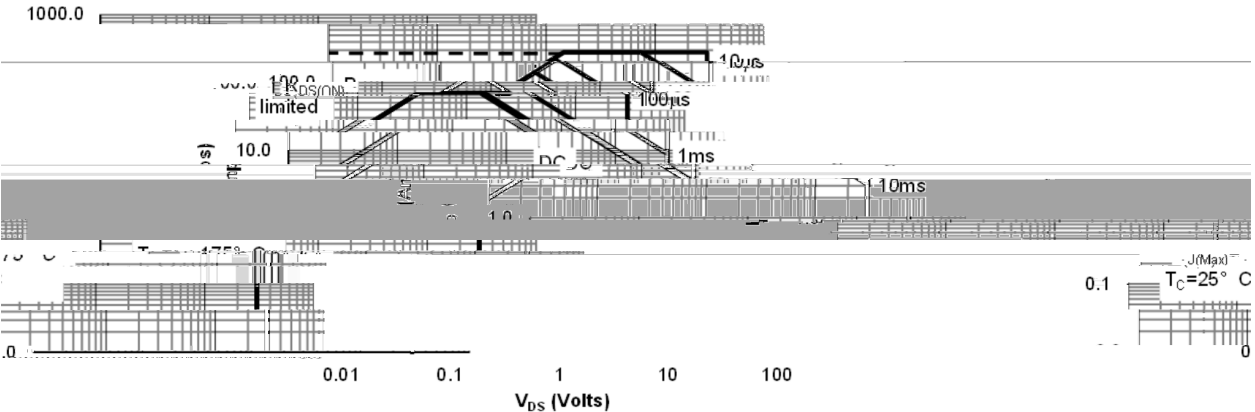


Figure 9: Maximum Forward Biased Safe Operating Area


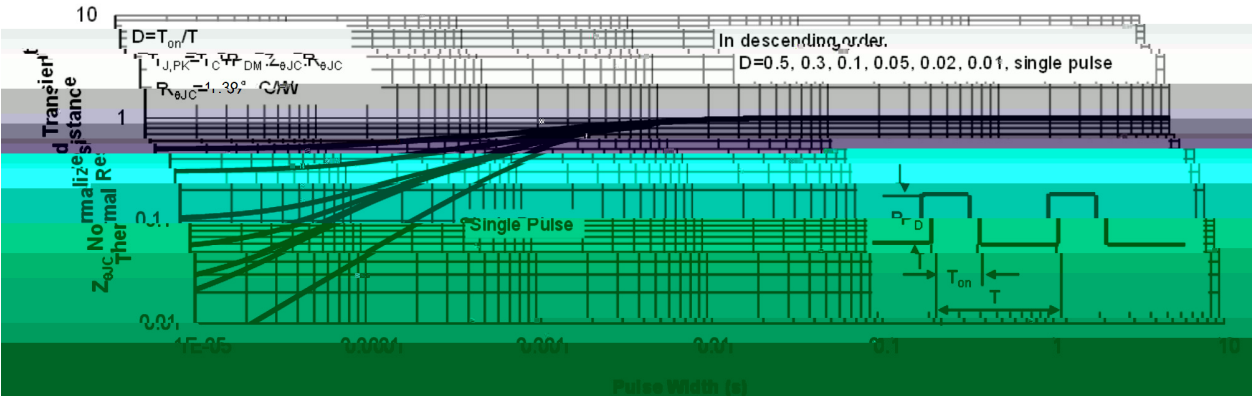


Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

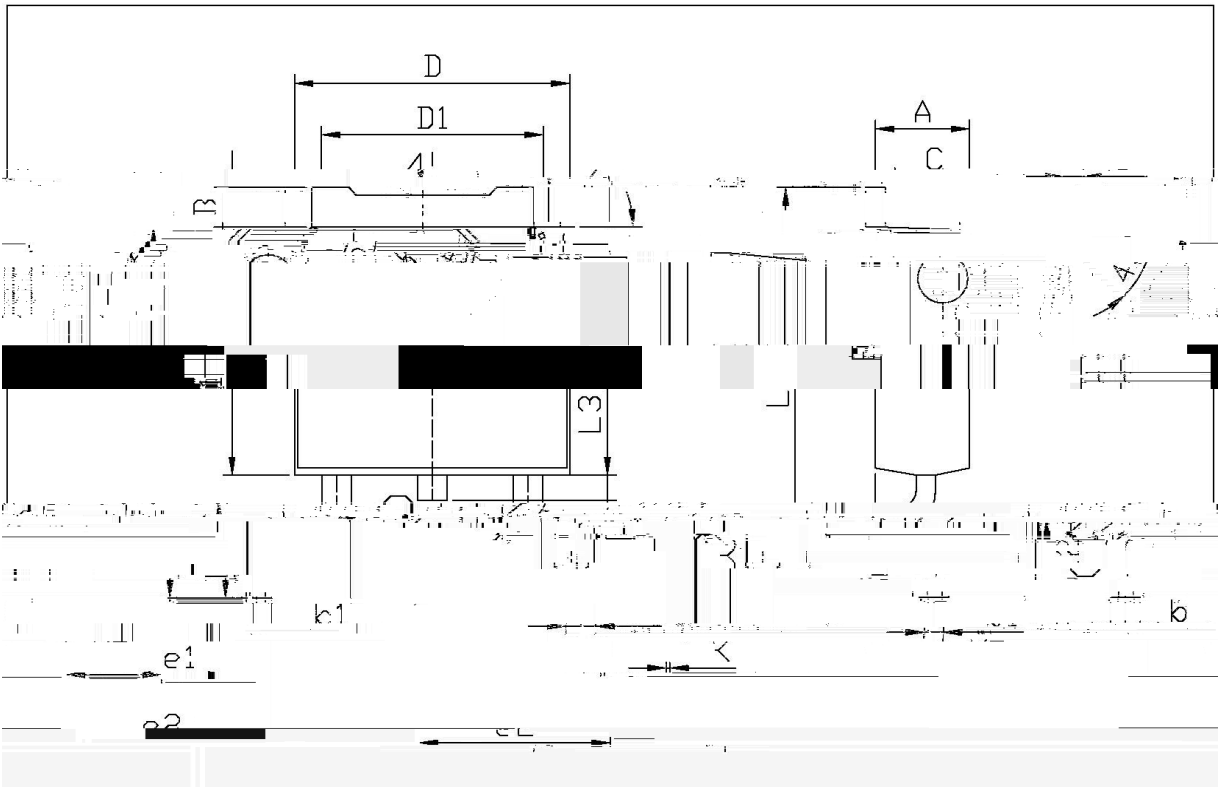

单位: mm

Dimensions, Millimeters		Dimensions, Millimeters	
Min	Max	Min	Max
2.25	2.34	0.95	1.25
0.35	0.45	0.55	0.85
0.60	0.90	6.45	6.75
K	0.00 0.10	DL	5.10 5.50

/ Marking Instructions

