

BRCS030N04RA

Rev.A May.-2023

/ Descriptions

TO-220 N

N-CHANNEL MOSFET in a TO-220 Plastic Package.

/ Features

$V_{DS}=40V$ $I_D=177A$ $V_{GS}=\pm 20V$

$R_{DS(on)}@10V$ 3.0m (Type.2.5m)

$R_{DS(on)}@4.5V$ 5.0m (Type.3.5m)


HF Product.

/ Applications


DC/DC

DC Motor Driver,Synchronous Rectification in DC/DC Converters.

/ Equivalent Circuit



/ Pinning



PIN1 G PIN 2 4 D PIN 3 S

/ Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	40	V
Drain Current		$I_D(T_c=25)$	177	A
Pulsed Drain Current		I_{DM}	560	A
Gate-Source Voltage		V_{GS}	± 20	V
Single Pulsed Avalanche Energy L=0.5mH		E_{AS}	435	mJ
Avalanche Current		I_{AS}	33	A
Total Power Dissipation		$P_D(T_c=25)$	170	W
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	
Thermal Resistance-Junction to Ambient	$t \leq 10s$	$R_{\theta JA}$	15	/W
	Steady-State		60	
Thermal Resistance-Junction to Case	Steady-State	$R_{\theta JC}$	0.74	




/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250 A$	40	47		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1	A
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250 A$	1	1.7	3	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=20A$		2.5	3	m
		$V_{GS}=4.5V$ $I_D=10A$		3.5	5	
Forward On Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$			1.2	V
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$, $f=1MHz$		1.3		
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1MHz$		9600		pF
Output Capacitance	C_{oss}			740		
Reverse Transfer Capacitance	C_{rss}			650		
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V$, $I_D=20A$ $V_{DS}=20V$,		51		nC
Total Gate Charge	$Q_{g(4.5V)}$			23		
Gate Source Charge	Q_{gs}			13.2		
Gate Drain Charge	Q_{gd}			3.1		





/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=20V$ $R_L=1\Omega$ $R_{GEN}=3\Omega$		11		ns
Turn-On Rise Time	t_r			11		
Turn-Off Delay Time	$t_{d(off)}$			40		
Turn-Off Fall Time	t_f			10		


/ Electrical Characteristic Curve

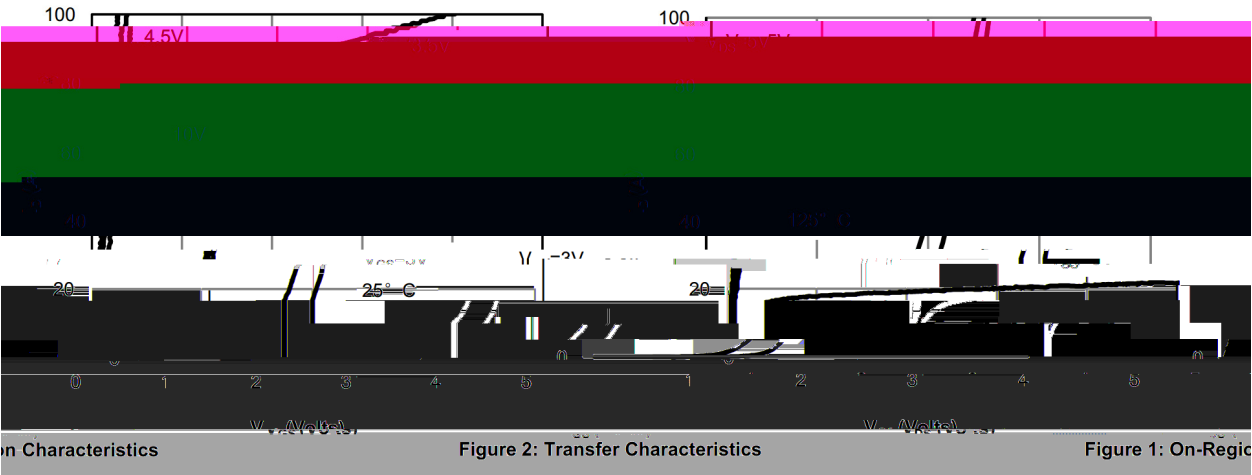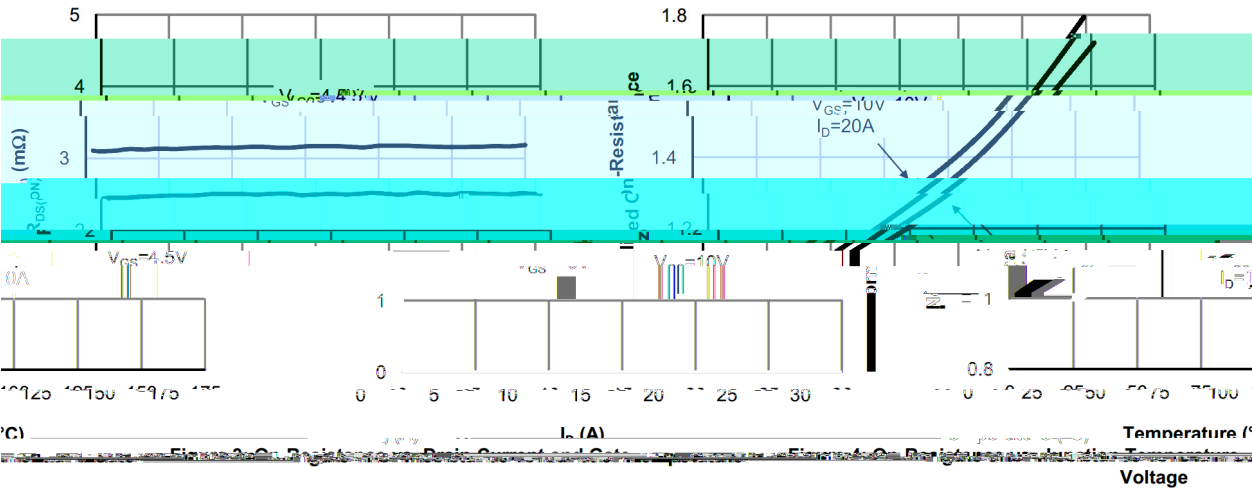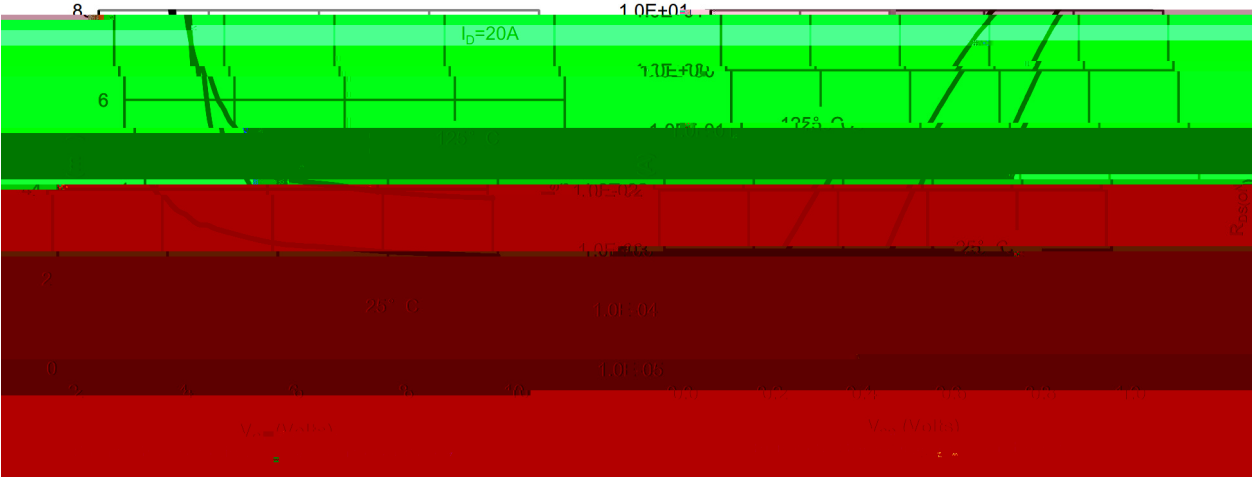


/ Electrical Characteristic Curve

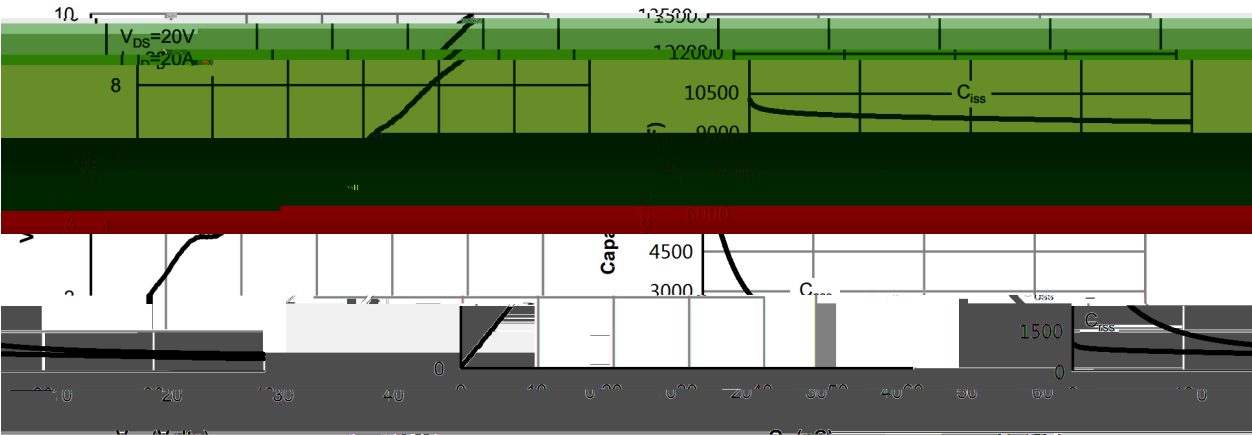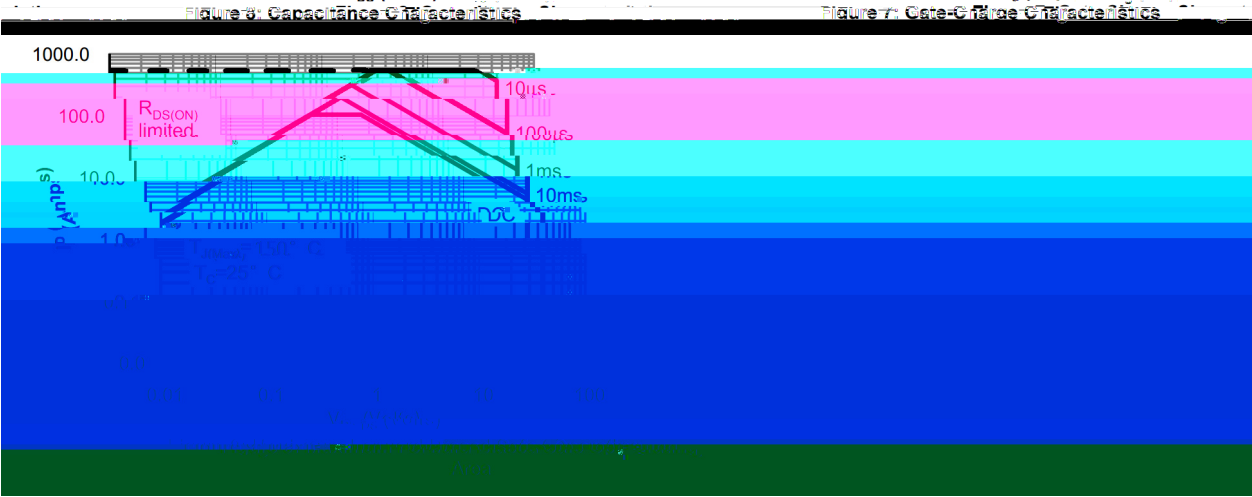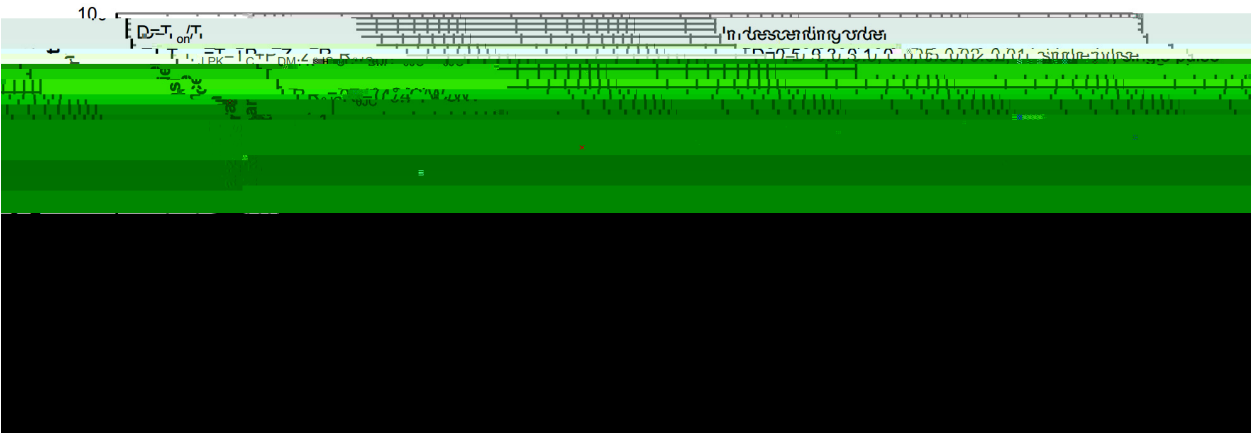

/ Package Dimensions

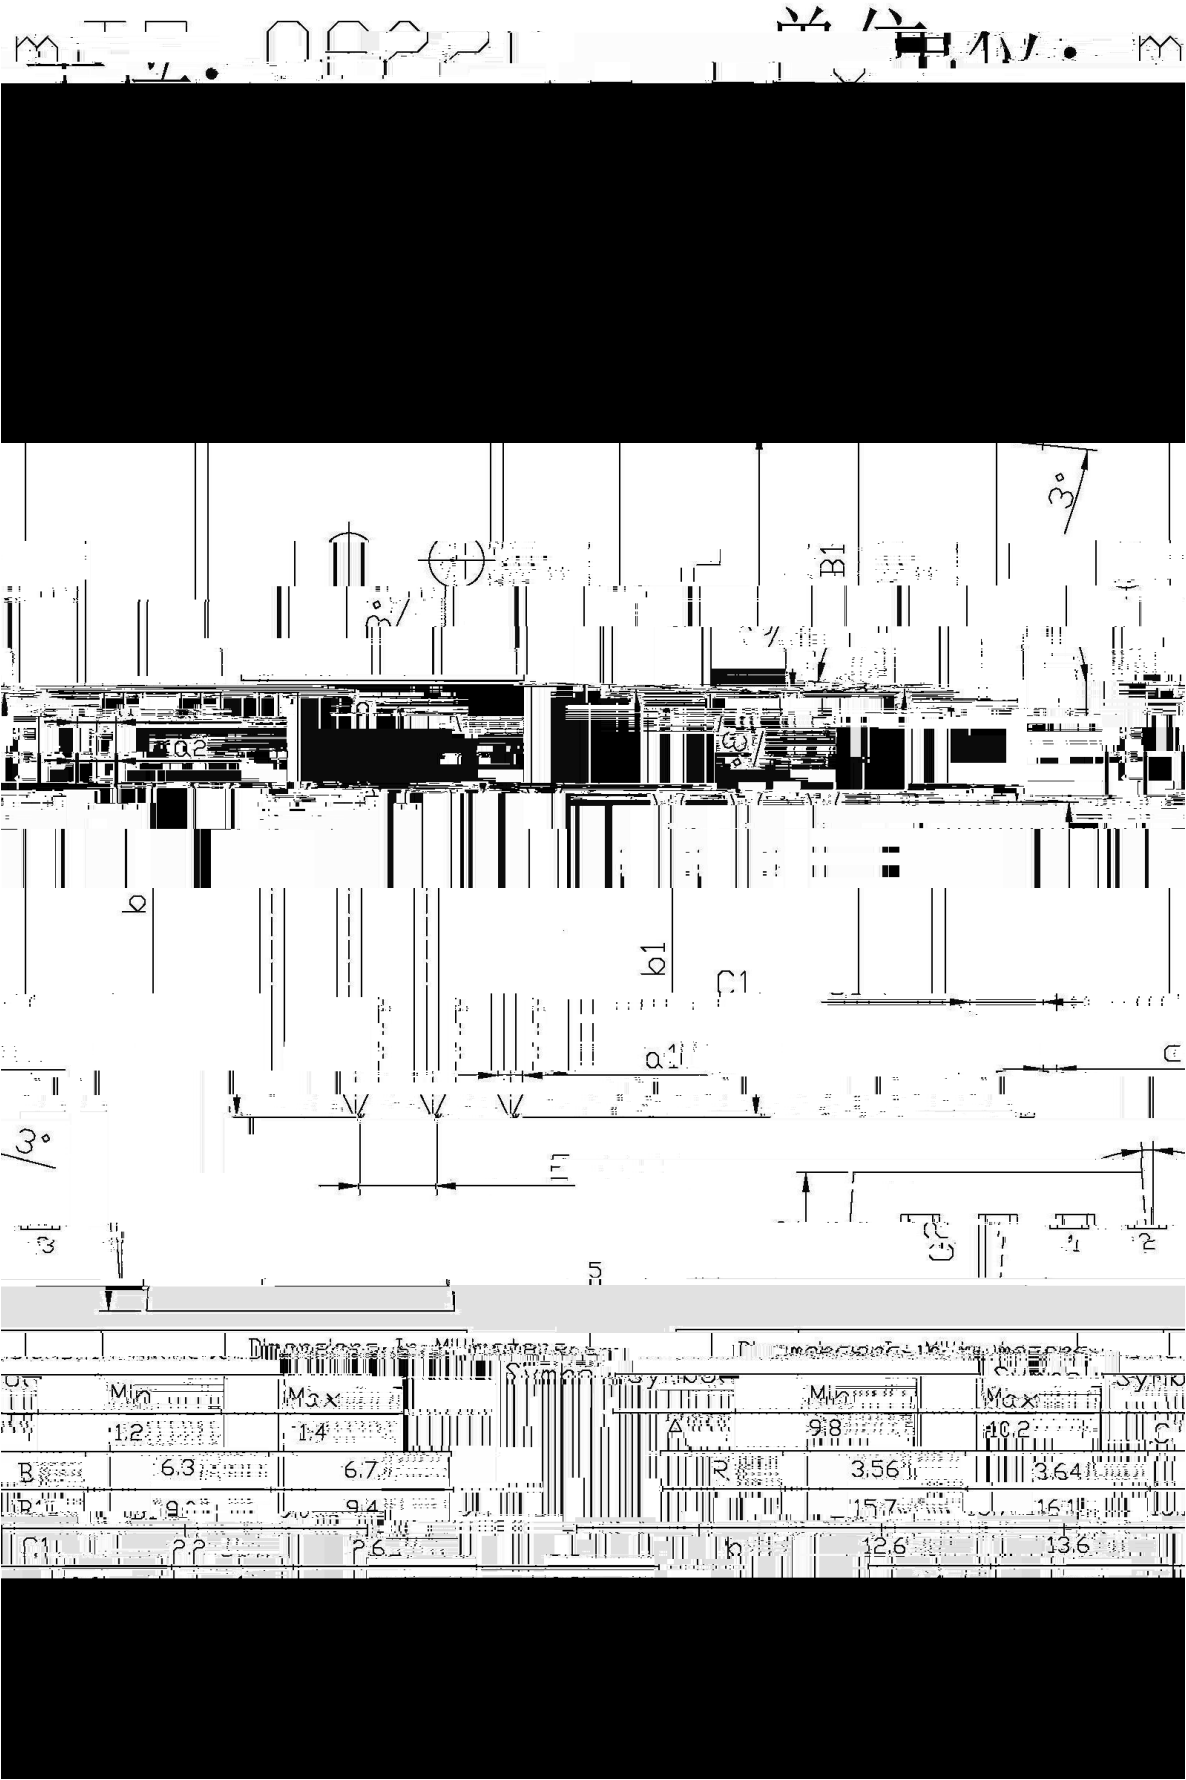

/ Marking Instructions

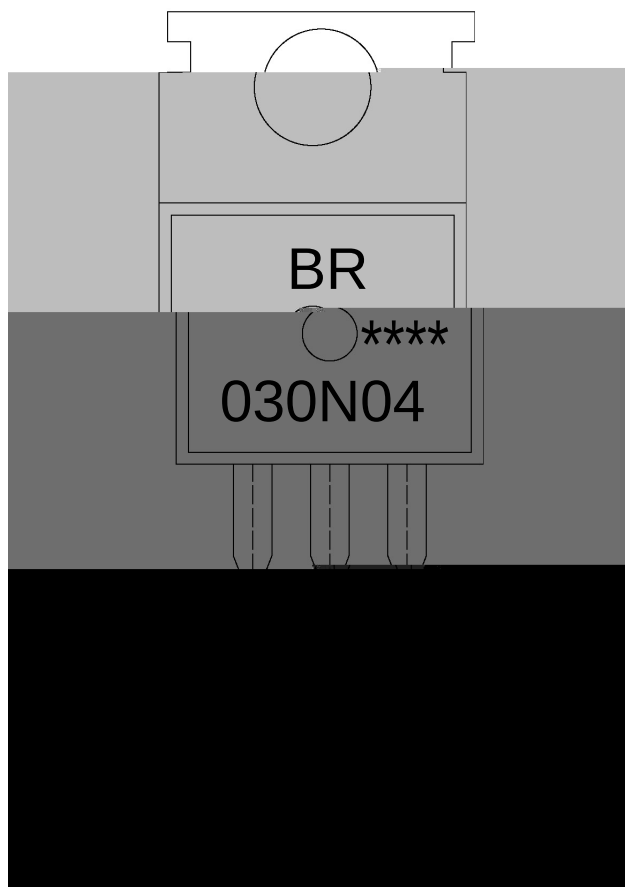

BR

030N04


Note:

BR: Company Code

030N04: Product Type

****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

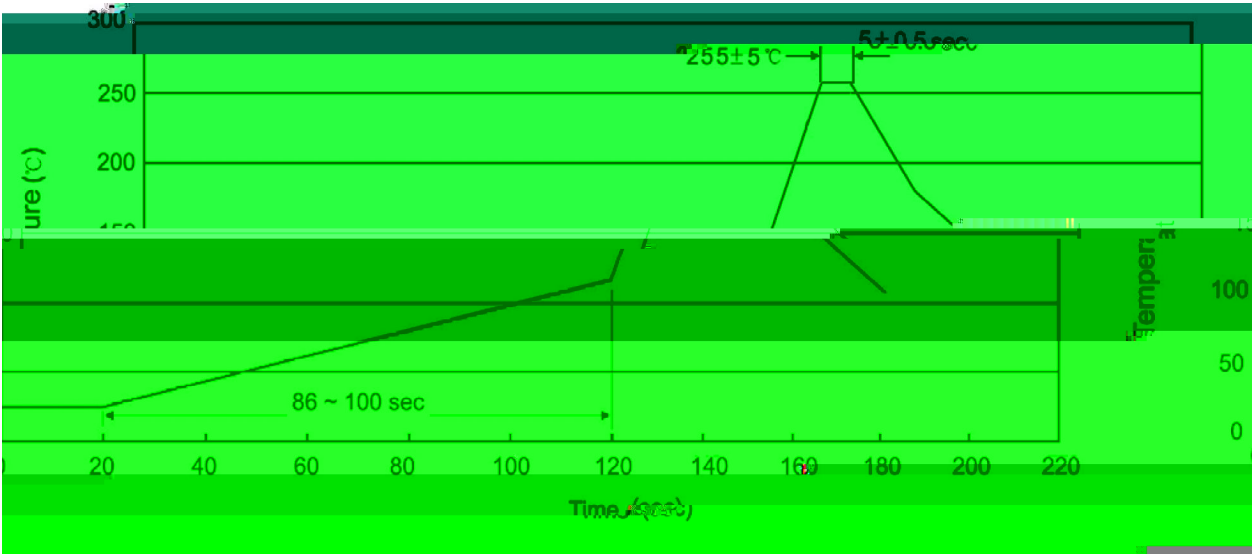

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195