

BRCS030N06SHBD

Rev.A Apr.-2024



DATA SHEET

TO-263

BRCS030N06SHBD

Rev.A Apr.-2024






DATA SHEET


@ f Parameter	... Z Symbol	f > Rating	% y Unit
Drain-Source Voltage	V _{DSS}	60	V
Drain Current	I _D (T _c =25)	182	A
Pulsed Drain Current	I _{DM}	530	A
Gate-Source Voltage	V _{GS}	f 20	V
Single Pulsed Avalanche Energy(L=0.5mH)	E _{AS}	946	mJ
Avalanche Current	I _{AS}	43.5	A
Total Power Dissipation	P _D (T _c =25)	180	W
Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 150	
Thermal Resistance-Junction to Ambient	t 0 10s R _{AS}		

@ f Parameter	... Z Symbol	y i Ú ^ Test Conditions	Â 4 > Min	Á ° > Typ	Â Ý > Max	% y Unit
Turn-On Delay Time	t _{d(on)}	V _{GS} =10V V _{DS} =30V R _L =1.5 R _{GEN} =3		15.7		ns
Turn-On Rise Time	t _r			16.4		
Turn-Off Delay Time	t _t					

Electrical Characteristic Curve

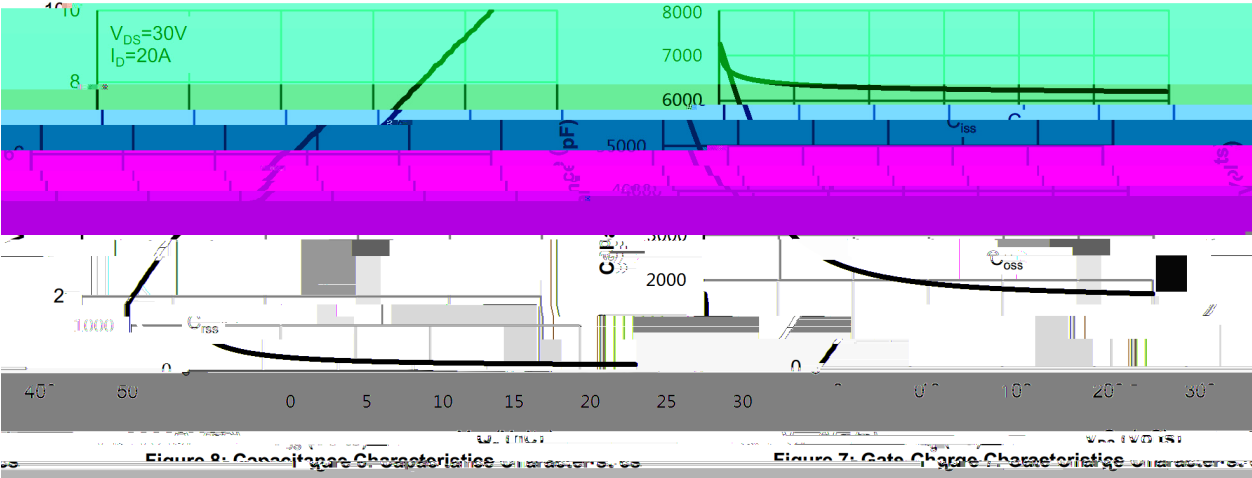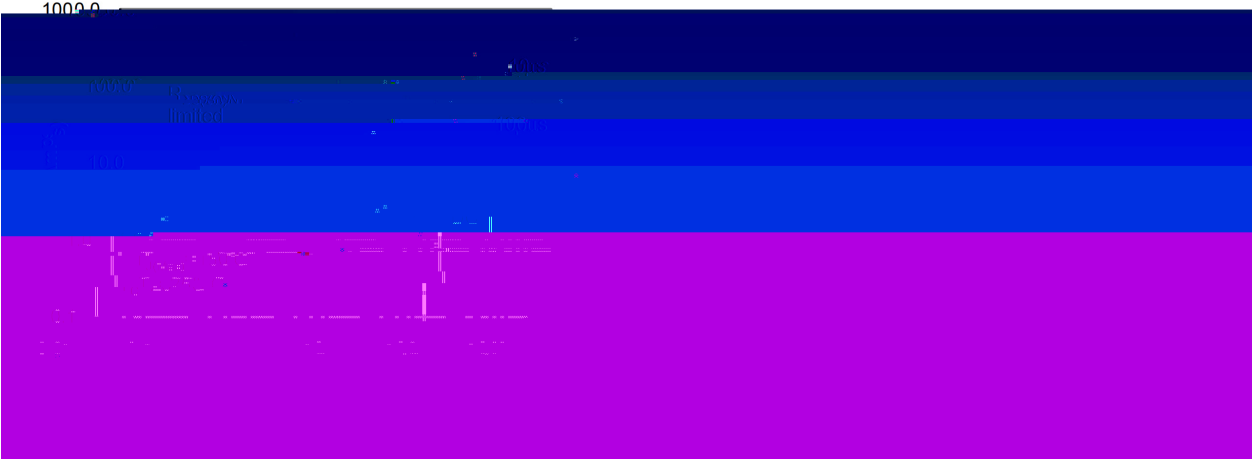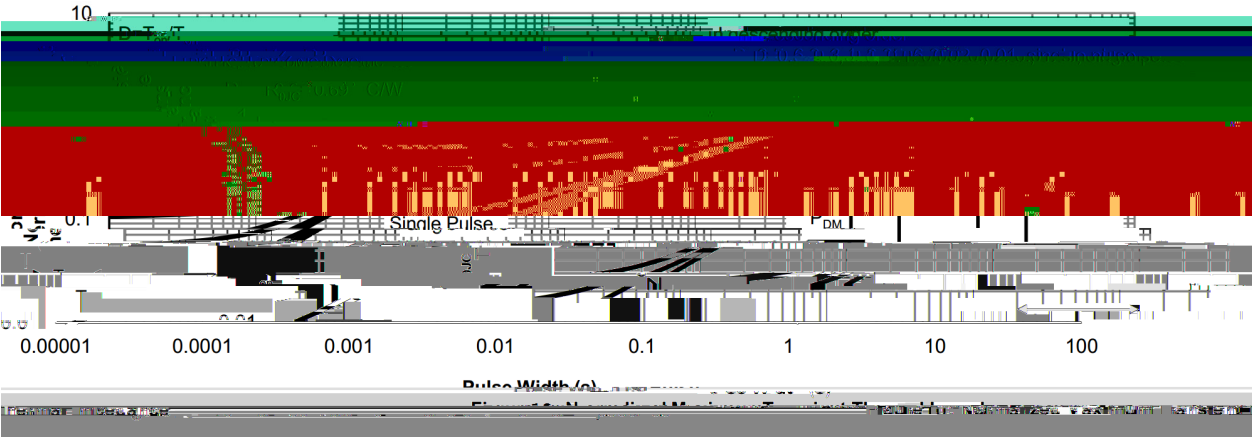

Ø □ =) ☎ / Package Dimensions

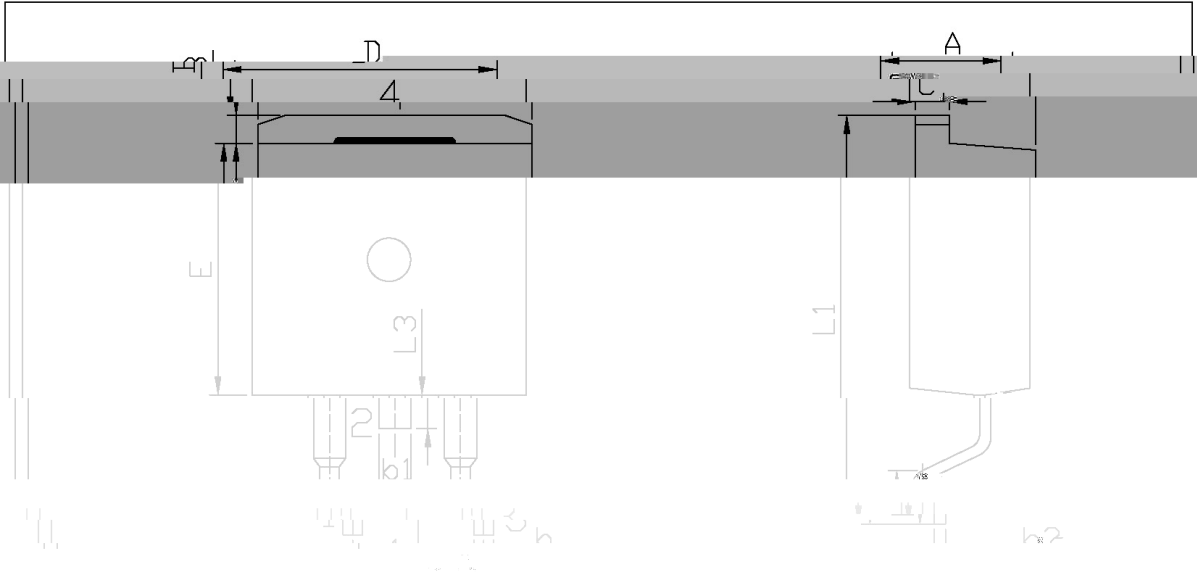

单位: mm

Max	Min	Max	Min
9.40	4.30	4.70	9.00
2.74	1.00	1.40	2.34
15.00	16.00	b1	1.15
2.74	2.64	b2	0.34
1.20	1.60	C	1.20
		D	9.80



BRCS030N06SHBD
Rev.A Apr.-2024

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

a ç y

- 1o• Ä ½ “† 150 ½180 - k ž • 60 ½90sec;
- 2o• Q > “† 245 r5 - k ž • 4 Ò 5 r0.5sec;
- 3o•D N ò i Ò 0 ,† 2 ½10 - /sec.

- Note:
- 1.Preheating:150~180 - , Time:60~90sec.
 - 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
 - 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

“† y 260 r5 - ž • y 10 r1 sec. Temp.:260±5 Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û ¡H	Dimension ;>û p . (unit Ånm³)
-------------------------	--------------	-------------------------------