

5 Ø / Descriptions

.> // x ?æ 3 « | o


/“ / Features

8*9 u 4 k y > z k) x y 4 k ... , %o k) í D }o


— ÷ / Applications

9 z 9 Ł ò y V æ Ł o *) *) ô Eo ‘ D } ä | ô Eo

^ W] Ô / Equivalent Circuit



Ô æ / Pinning

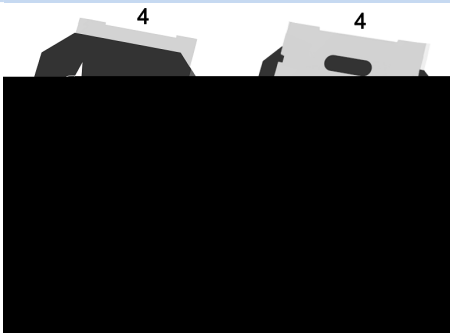

y y y y

, M V / Marking

- ~ “ ¢o

^ a ? d / Absolute Maximum Ratings(Ta=25 ;)

@		Z		% y
			f	
	0	,		
		,		

@i x? d / Electrical Characteristics(Ta=25 ;)

@	Z	y i Ú	´ 4	´ ”	´ Ý	% y
					f	

④ì x? d / Electrical Characteristics(Ta=25 ;)

@	Z	y i Ú	´ 4	` ”	´ Ý	% y
		i i				

Electrical Characteristic Curve






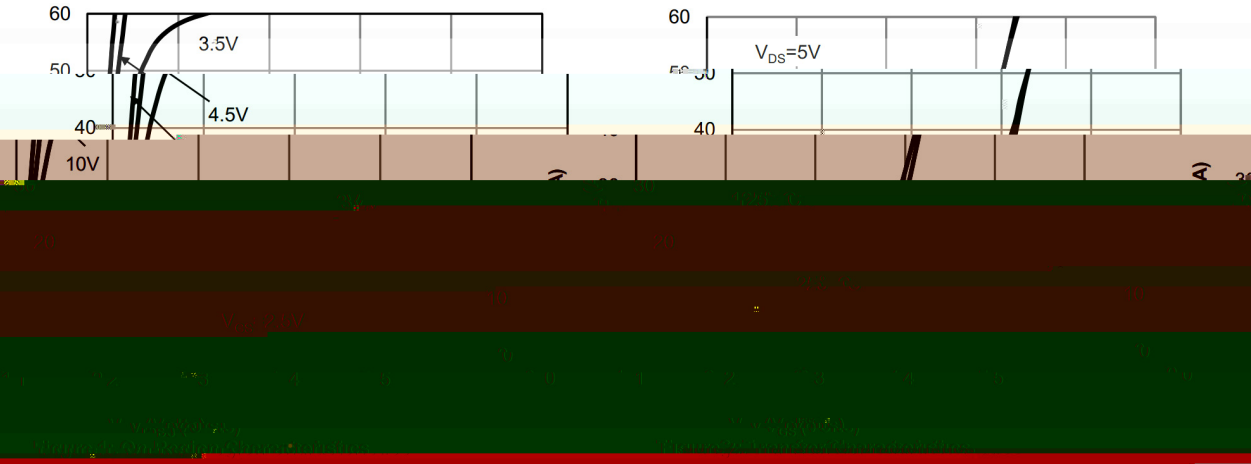


Figure 1: On-Resistance vs. Drain Current


Figure 2: On-Resistance vs. Drain Current

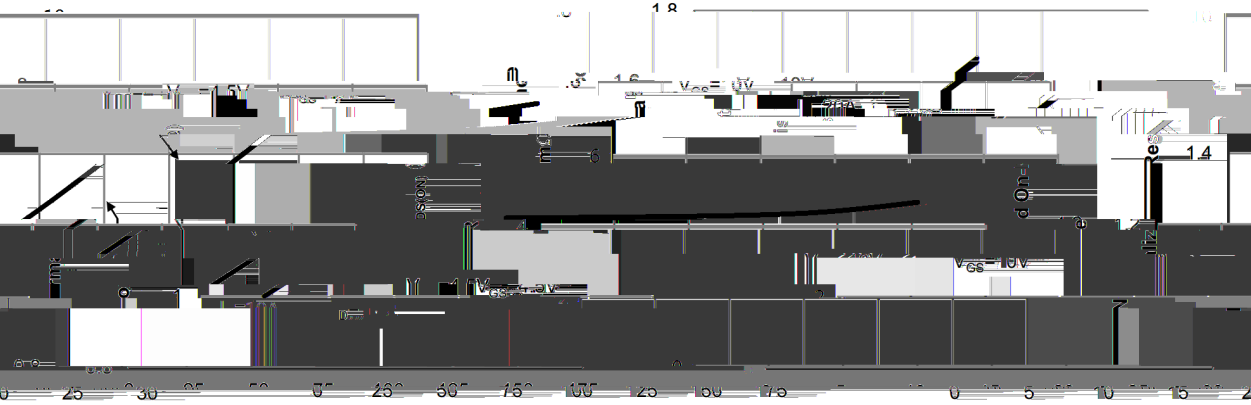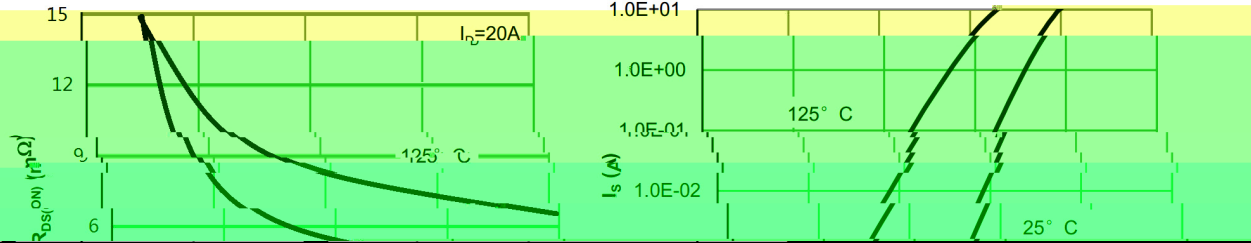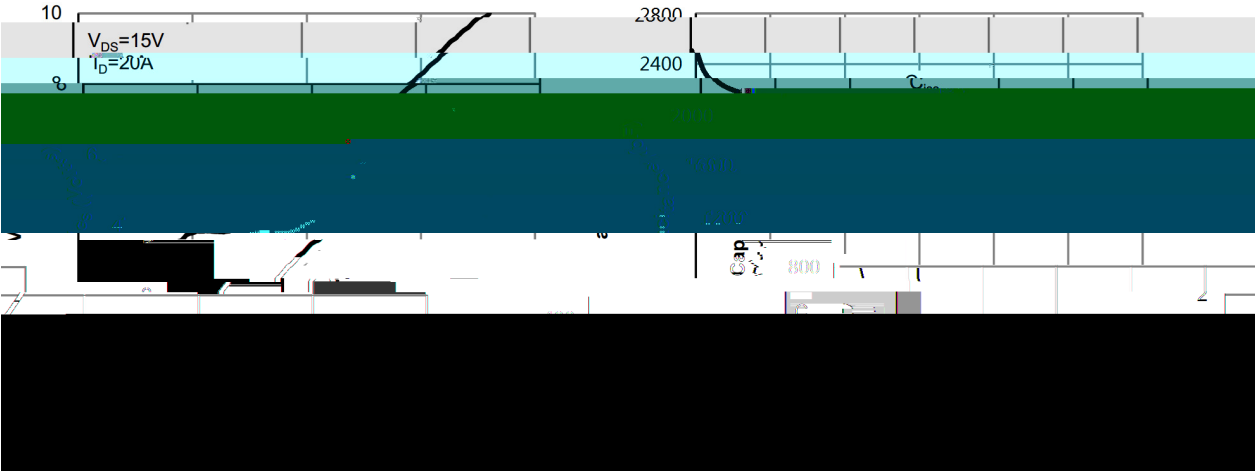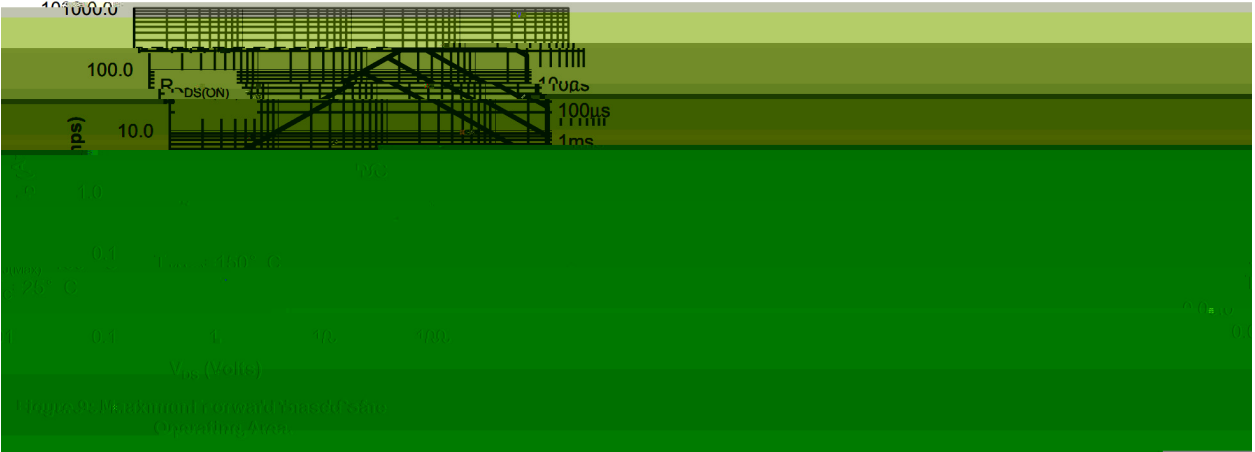

Electrical Characteristic Curve

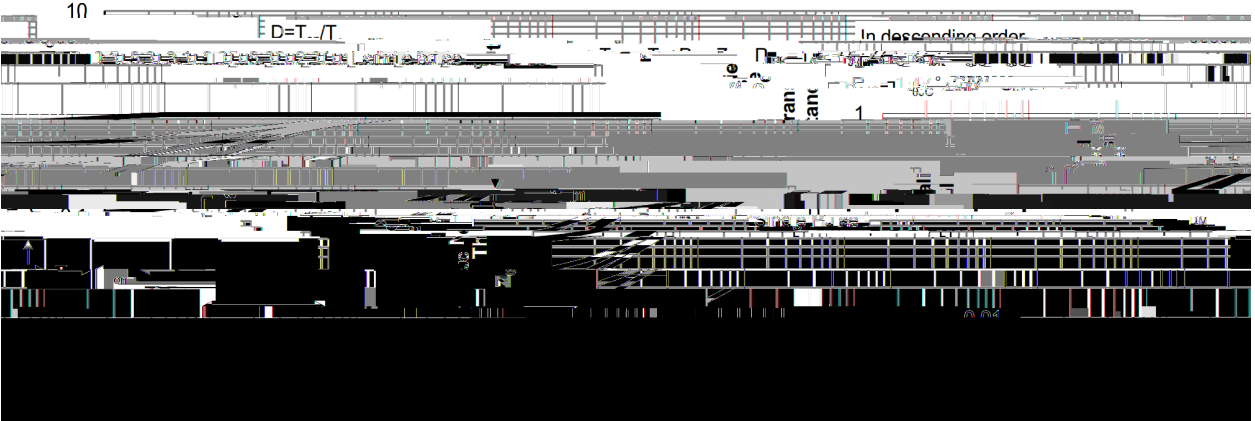

Ø =) ¢ / Package Dimensions

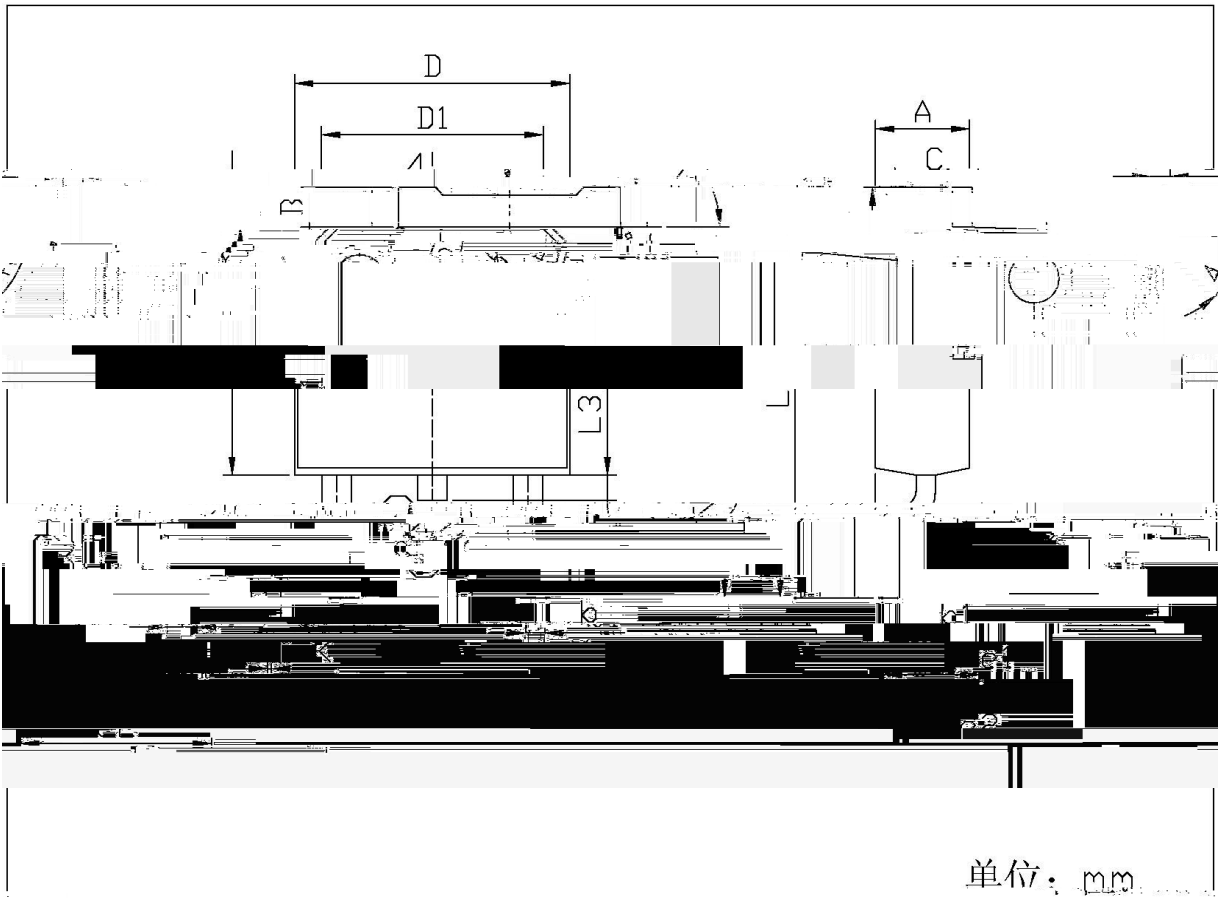


单位: mm

Dimensions in Millimeters				Dimensions in Millimeters			
Min	Max	Symbol	Min	Max	Symbol	Min	Max
25	27.24	A	2.34	2.54	B	0.95	1.05
60	62.5	C	0.75	0.85	D	5.30	5.50
10	10.75	D1	0.45	0.55	L3	1.50	1.65
0.05	0.075	E	6.45	6.75	F	0.35	0.45
0.003	0.007	G	5.10	5.50	H	0.35	0.45

252

T0-2

, M y / Marking Instructions

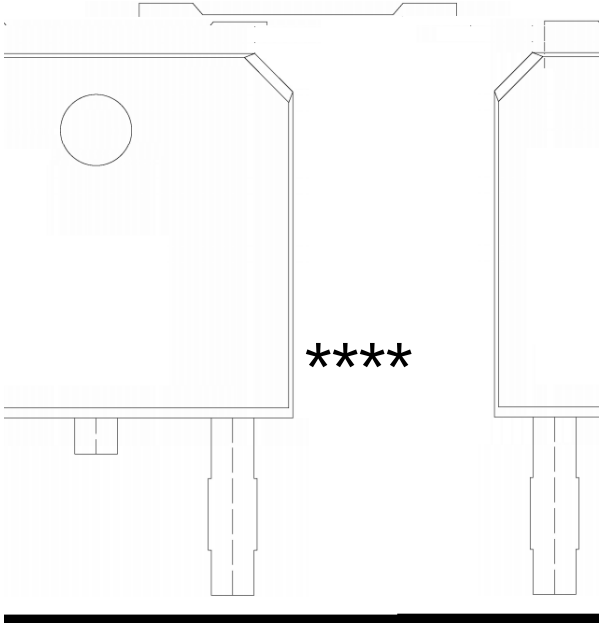

“ ¢ y
y , [W A
y ” Z W A
y ŷD Z W A k ŷD Z J

BRCS050N03DP