

22. $\frac{L}{\lambda}$

--	--	--	--	--

/ Descriptions


N MOS


/ Features $V_{DS} (V) = 30V$ $I_D = 67A (V_{GS} = \pm 20V)$ $R_{DS(ON)}@10V \leq 6m\Omega$

HF Product.

/ Applications

DC/DC ,

/ Equivalent Circuit**/ Pinning****/ Marking**




	i_c		
	i_c		
			$^{\circ}\text{C}$
			i_c

BRCS060N03D

Tr 00.564 0 000.564 0 015.3415



/ Marking Instructions

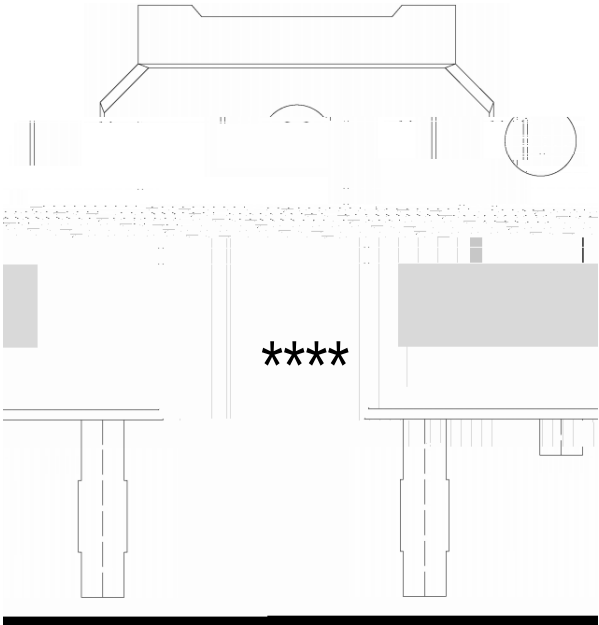

060N03

[illegible] $\pm$

°C

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube	Inner Box	Outer Box
TO-251/252	75	48	1	5	18 000	526×20.5×5.25	555×164×50	575×290×180