


	! " #	\$! % & '	! () % * +	, -	. /
A	2021.12.30	All	0 1 AOS-AOT288L(2 3 0 4) & AOS-AOT66920L(0 1 5 6) 7 8 9 : ; - <	= > ?	@ A B

BRCS070N08SRA

Rev.A Dec.-2021



TO-220 C D D E N F G H I J K L

N-CHANNEL MOSFET in a TO-220 Plastic Package.

M N O, P Q R S T L U

Ultra Low On-Resistance, fast switching.

V W X Y Z [\ | N] ^ _ ` a b c P F C N d e ? [f g h i j k % N l m n o L

These devices are well o



参数



A

A


参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
-----------------	--------------	-------------------------	------------	------------	------------	------------



/ Electrical Characteristic Curve

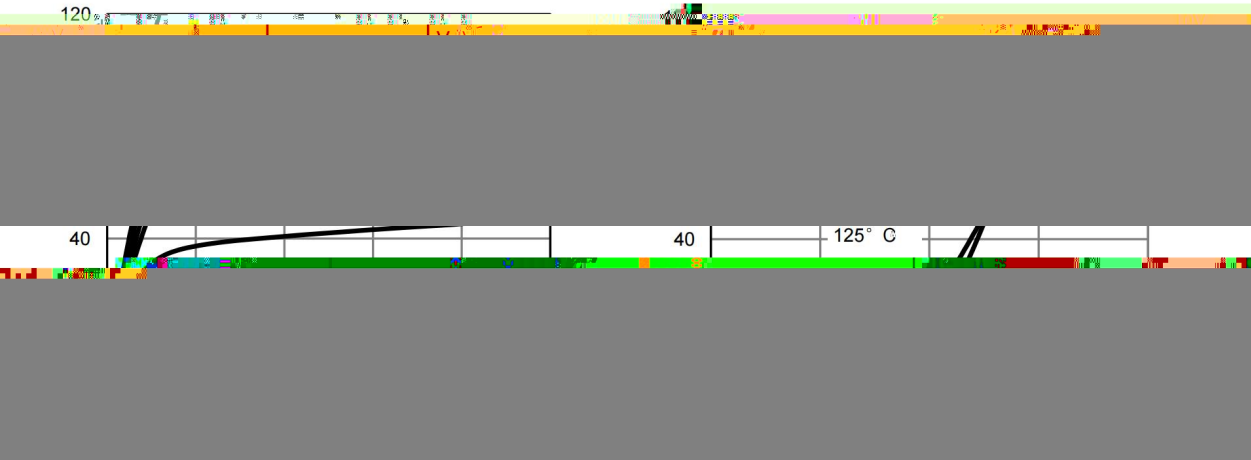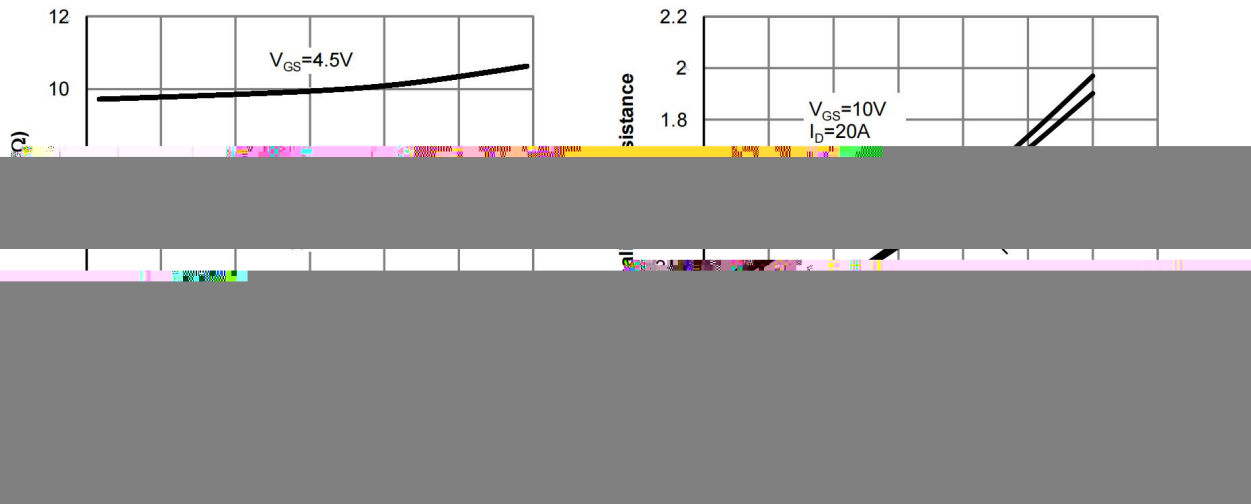

/ Package Dimensions

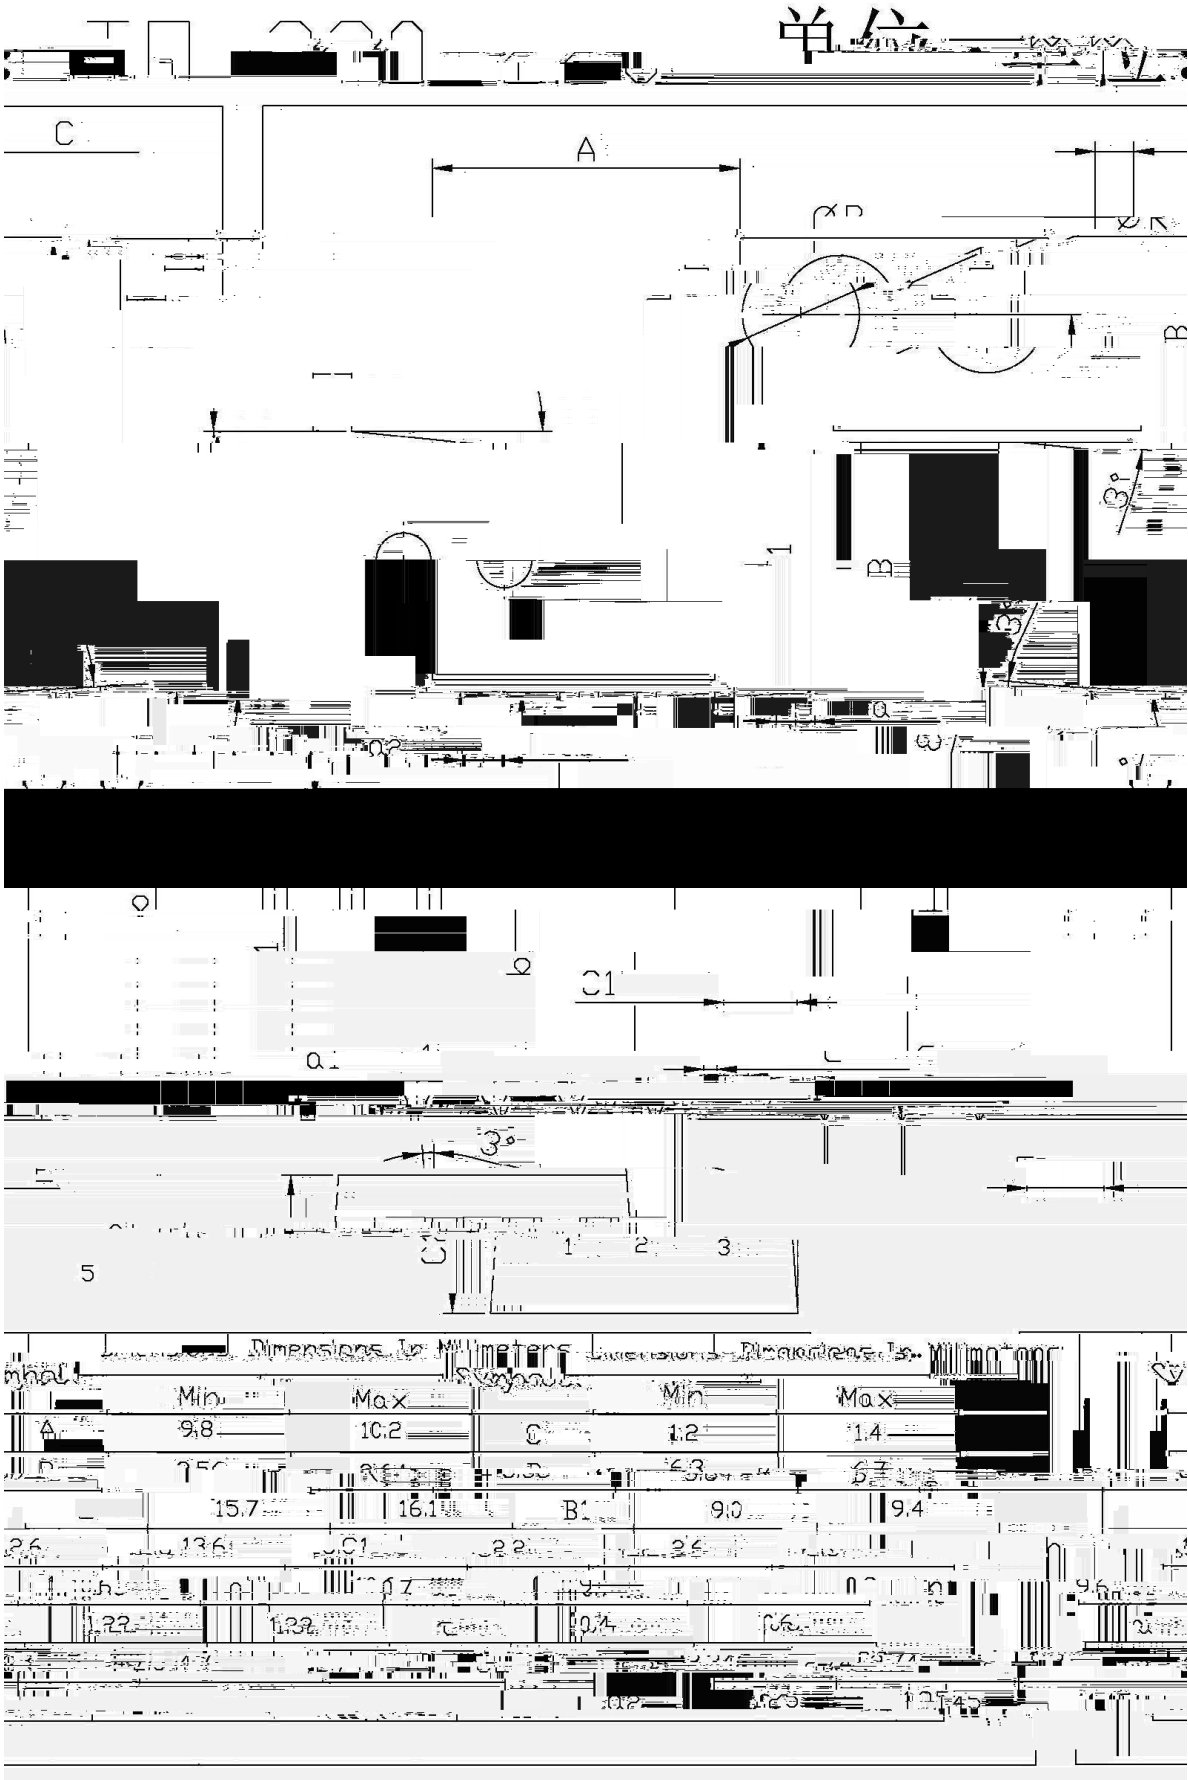

() π Temperature Profile for Dip Soldering(Pb-Free)

ρ

