





Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current			

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------


/ Electrical Characteristic Curve

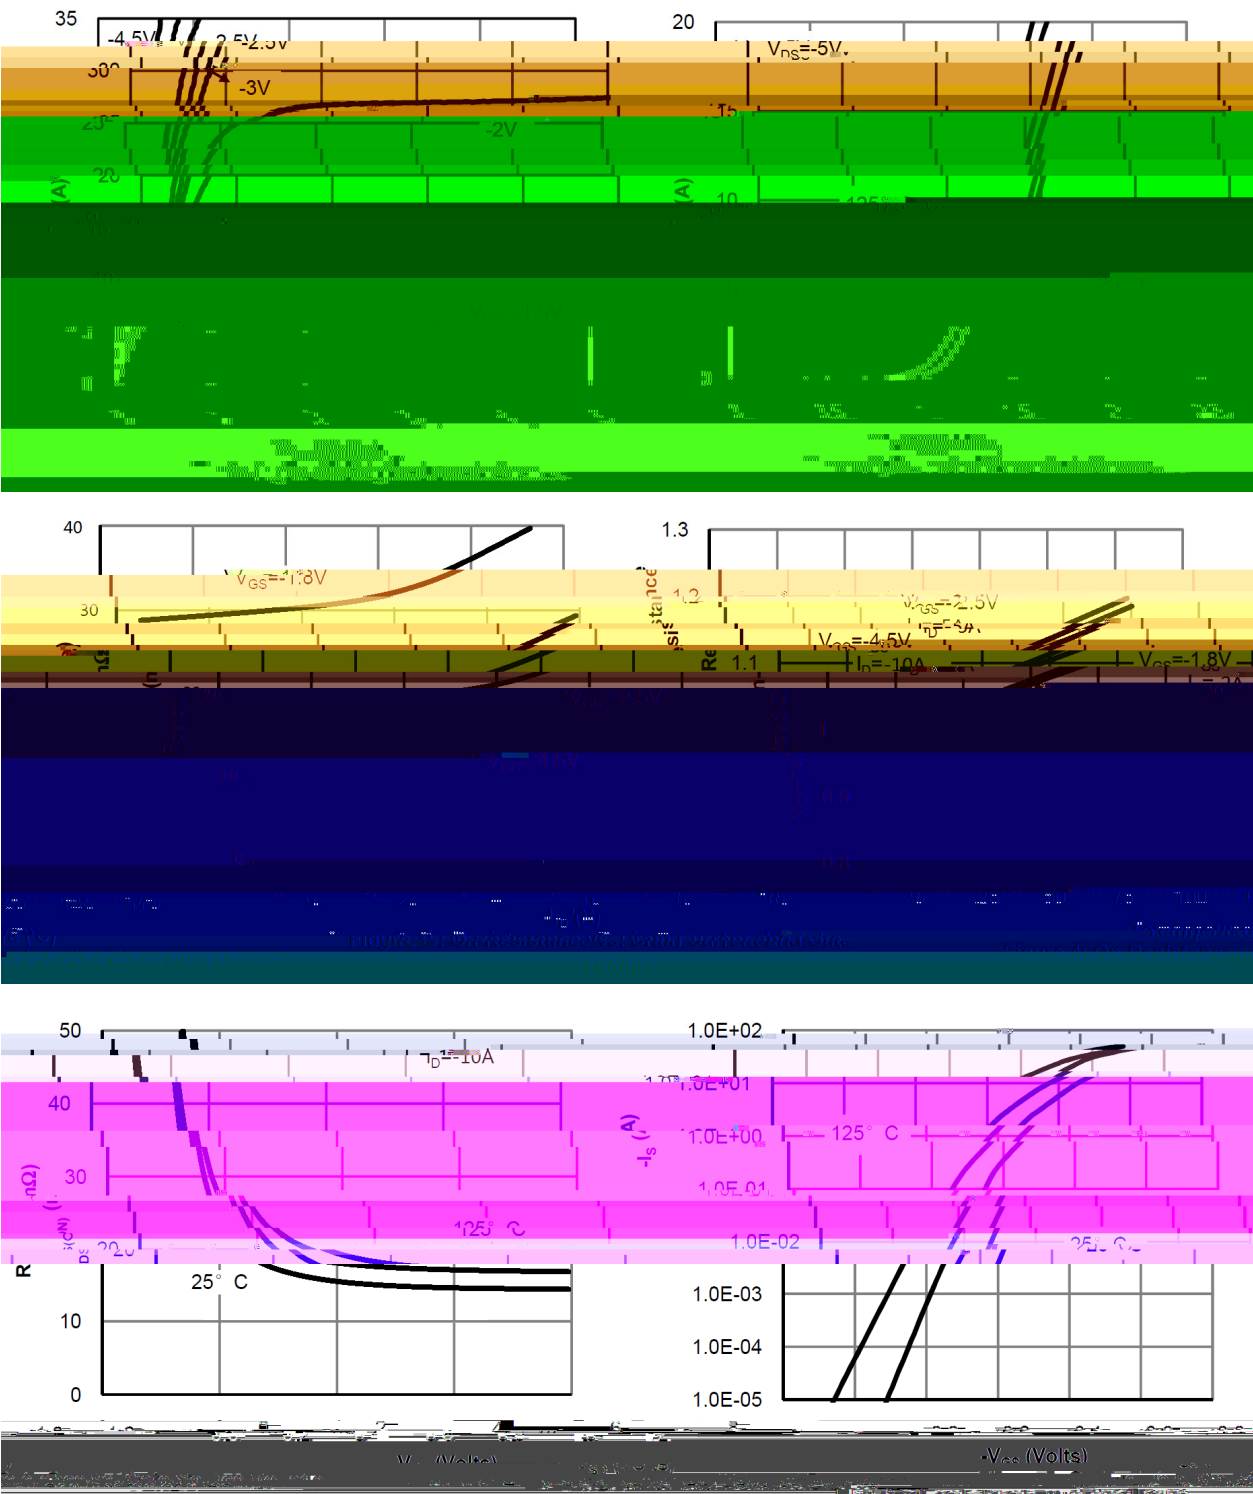


/ Electrical Characteristic Curve

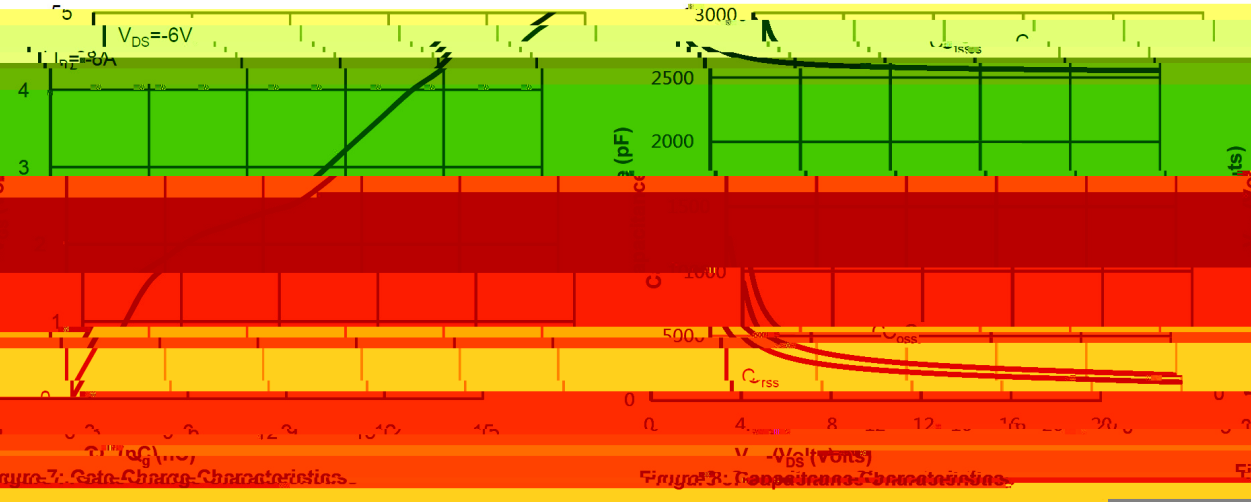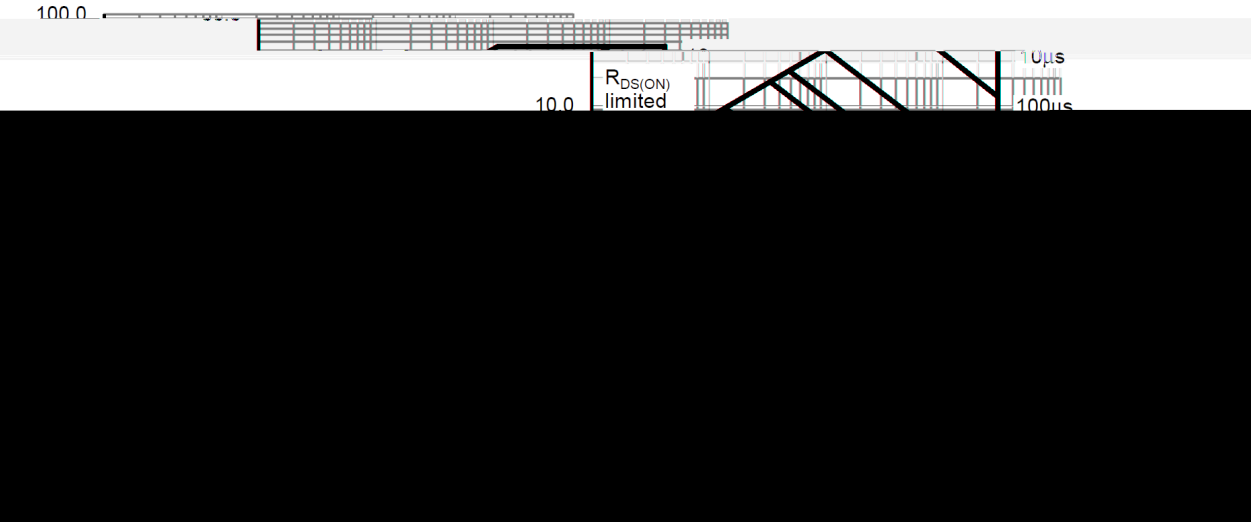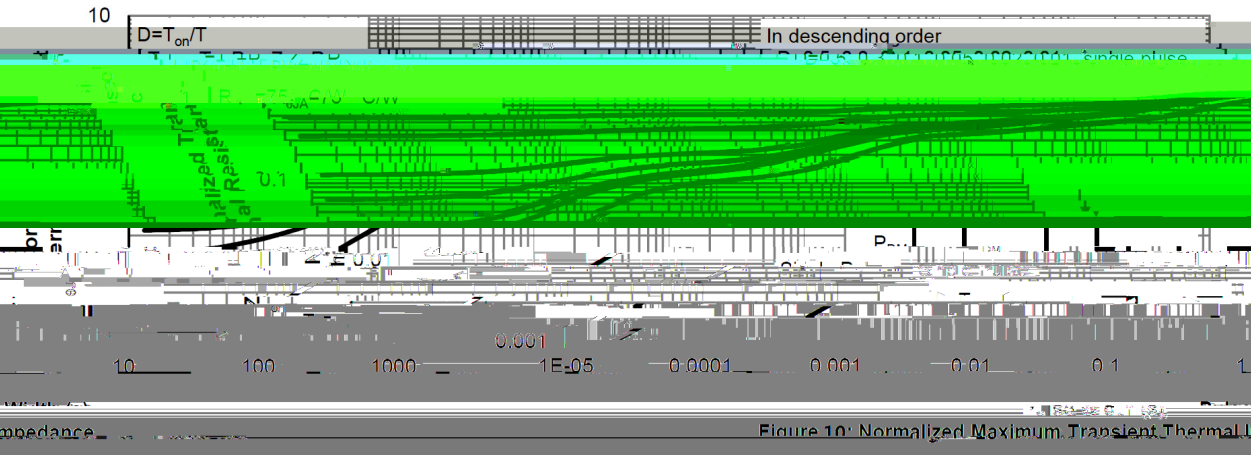

/ Package Dimensions

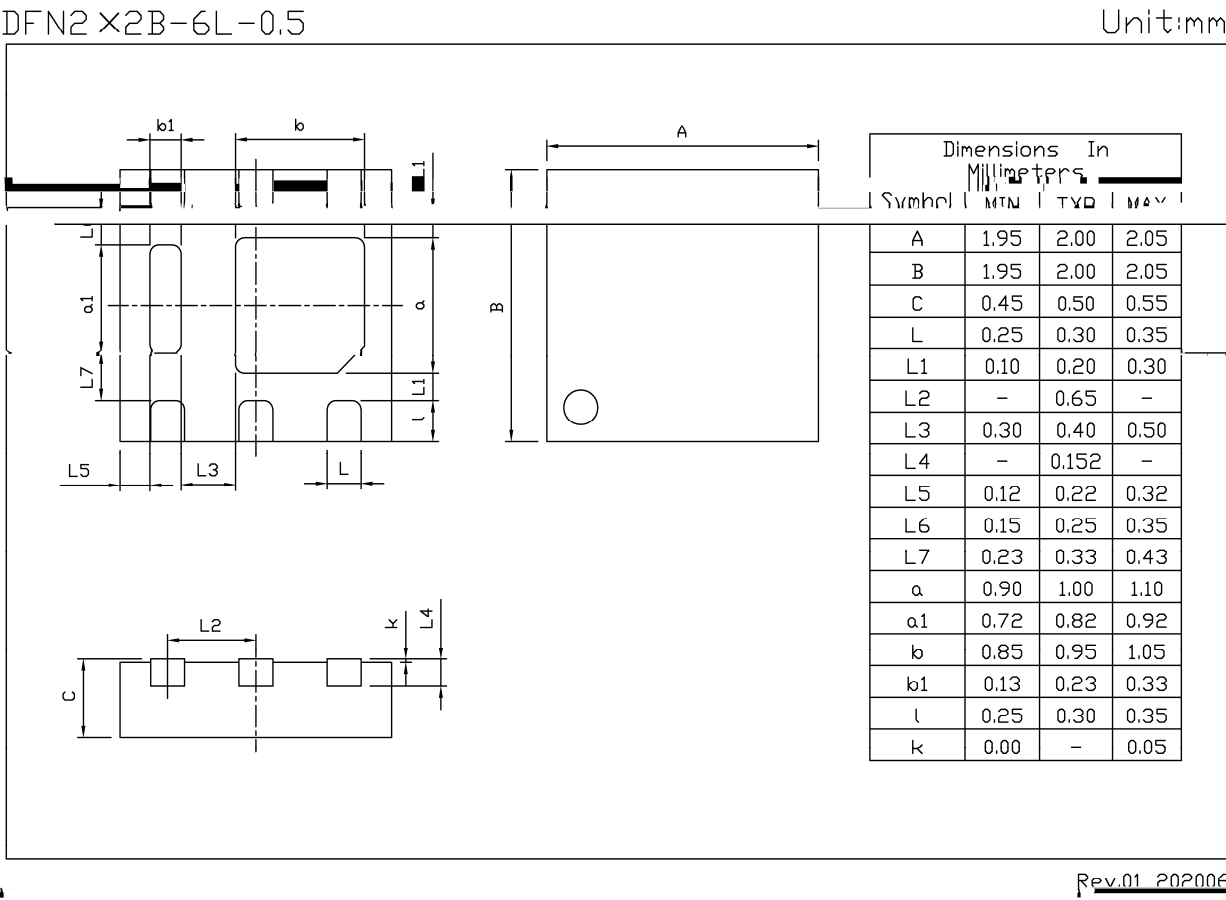

/ Marking Instructions

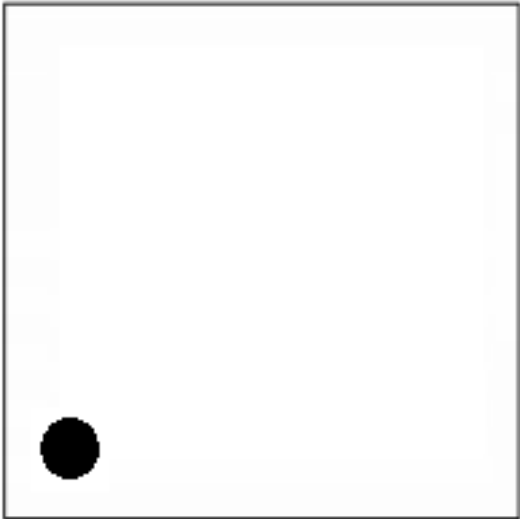

BR

150P02

Note:

BR: Company or-43(4der-43(4)TJ/*..0004 Tc(.694 Tw[h50P02):-84(C.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

- Note:
- 1

150 180

60 90sec;

2

245±5

5±0.5sec;
- 3
- 1.Preheating:150~180 , Time:60~90sec.
- 2.Peak Temp.:245±5 , Duration:5±0.5sec.