



(.((/012/3(4/5643((


	! " # \$	% ! " & ' (	! ") * & + ,	- .	/ 0
1	2345644673	188	9 : ; 23<37 =>62?2 @ A B C 9 : DE23<37FG =>62?4	H I	J K L






(






Parameter	!	Symbol
-----------	---	--------





Parameter	! Symbol	% & ' (Test Conditions	) * " Min	+ , " Typ	) - " Max	# \$ Unit
Total Gate Charge		V _{DS} =15V I _D =20.0A		V _{GS} =10V		nC





((.((- B/5?415:B(K:4:5?/412?15(A40/(

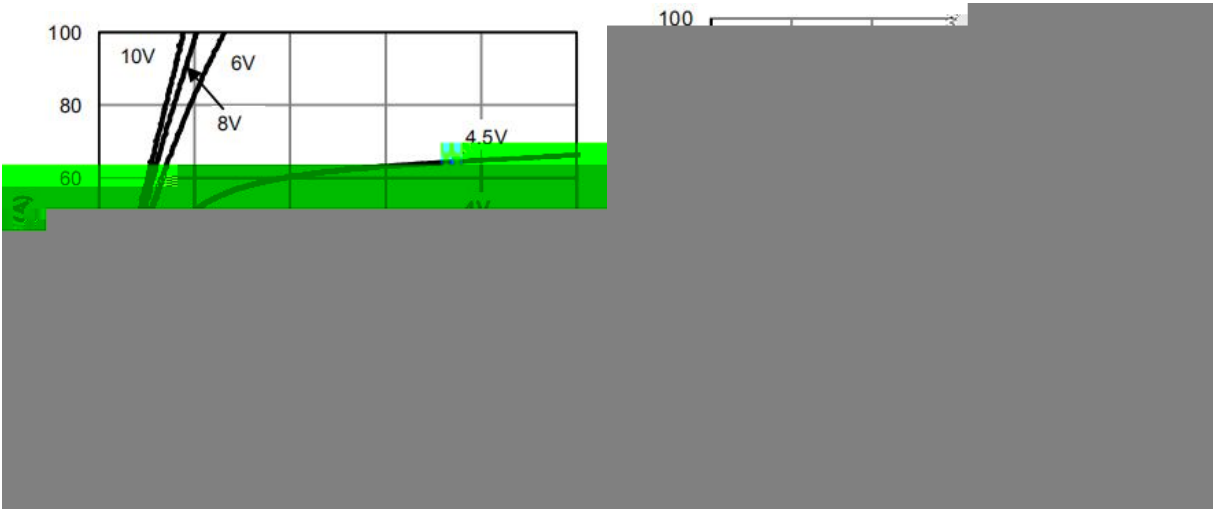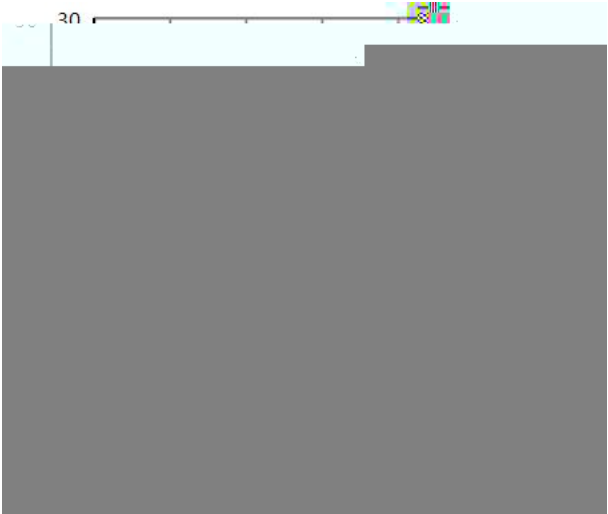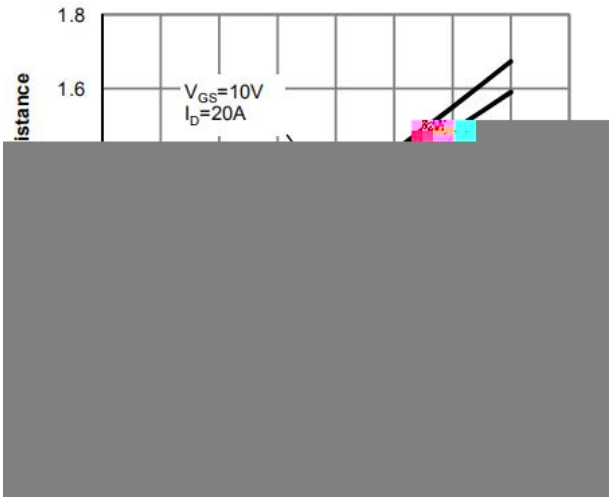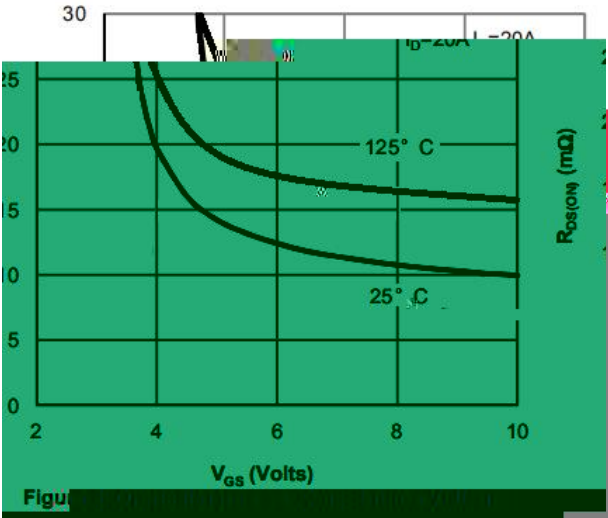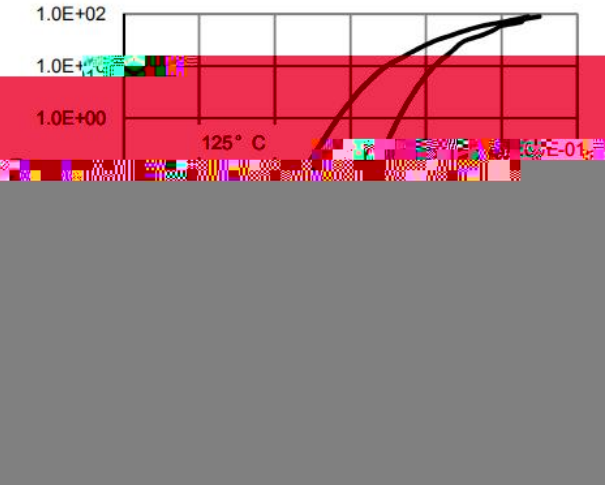

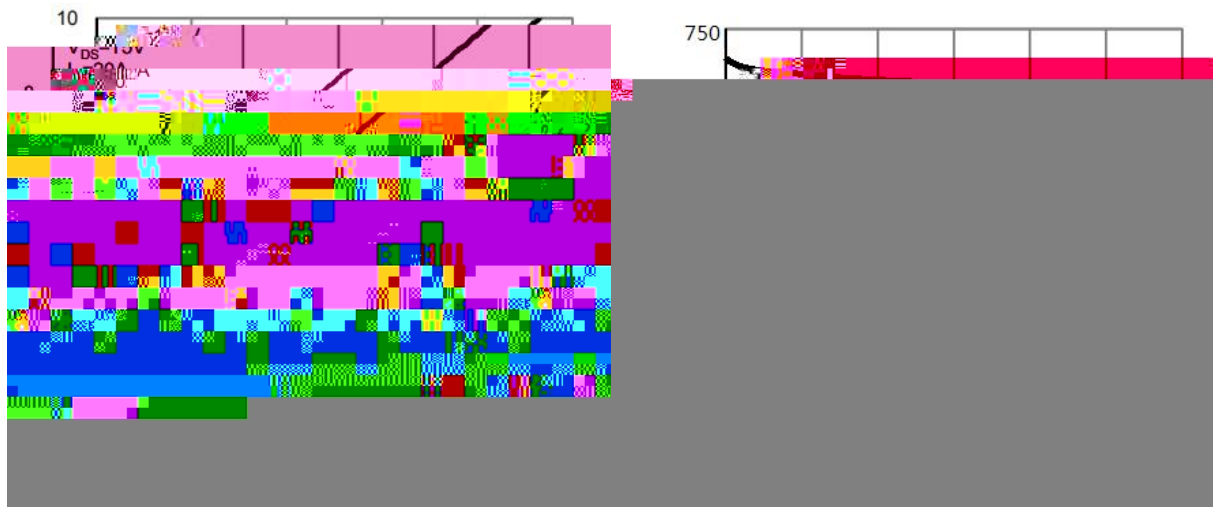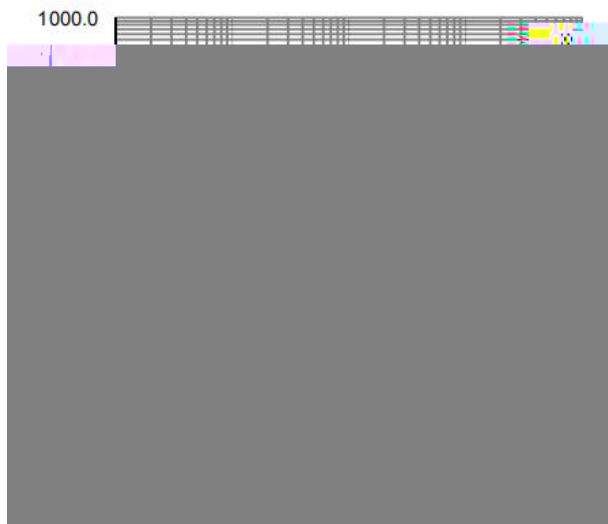


((. (' : 5 ; := / () 1 F / < 2 1 6 < 2 (

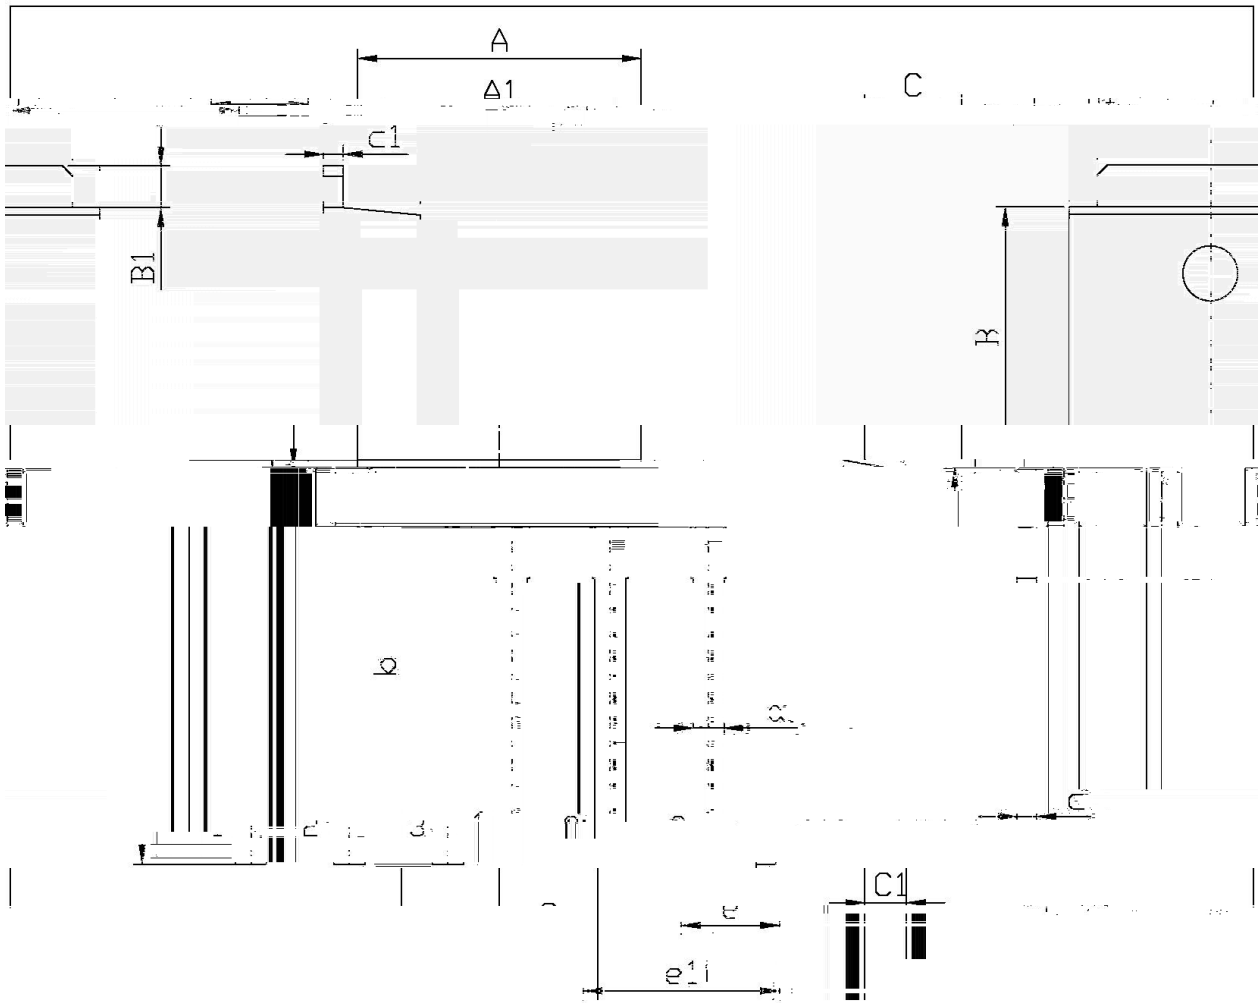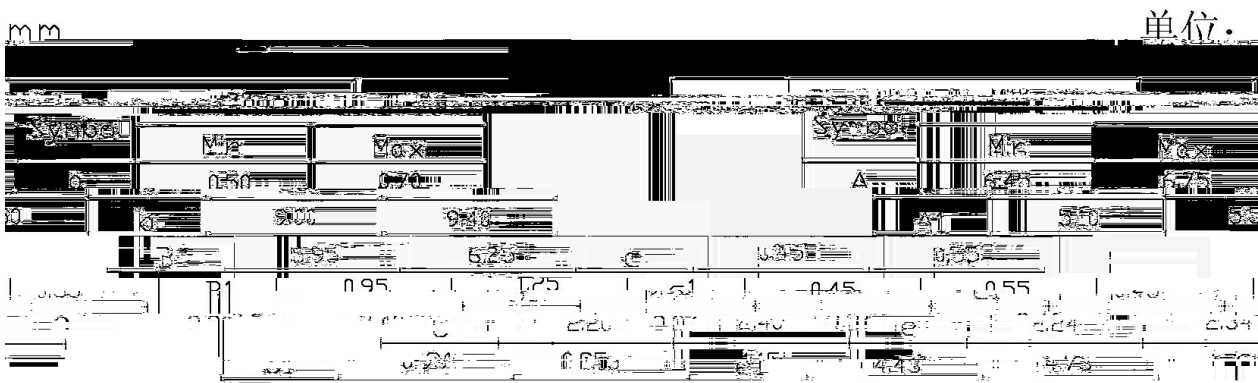


!"#\$%&'(
Rev.A Nov.-2019

)*+*(!,--+



G J((.((+/ F>/4: ?A4/(' 4601B/(064() 1>(! 683/41<=G ' DP@4/ /J(

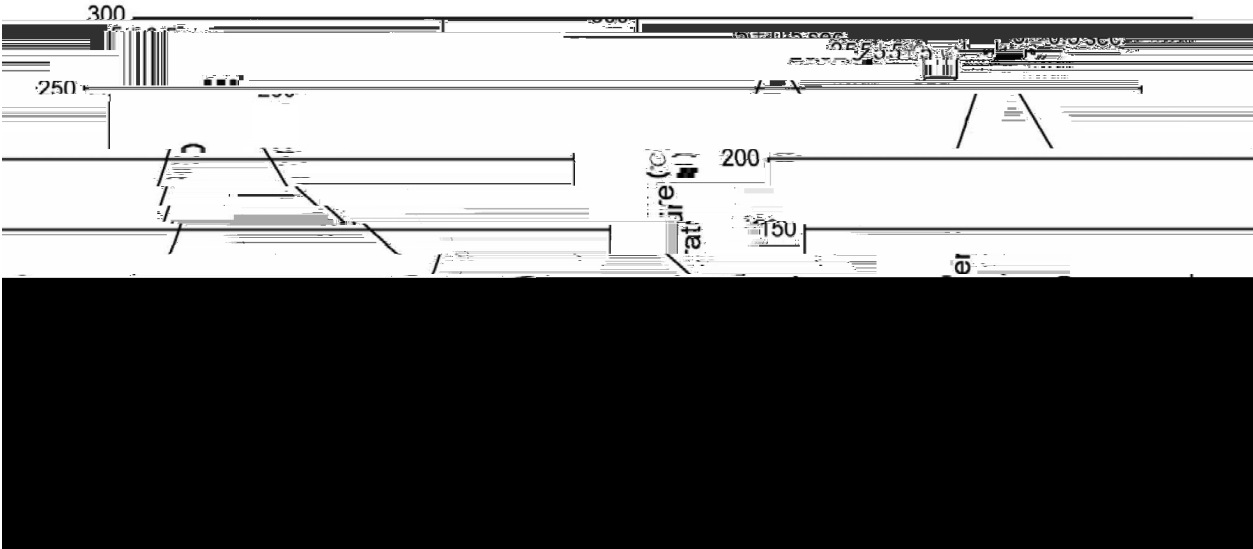

- | | | | | |
|---|--------|-----------|-------|---|
| 1 | 25 150 | 60 90sec; | Note: | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | | 3. Cooling Speed: 2~10 /s□ |