

BRCS26N50PA

--	--	--	--

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
	Qg					
	Qgs					
	Qgd					
Turn-ON Delay Time		Ω				

1.

≤300μs

≤2%


2.

N

≤


≤

/ Electrical Characteristic Curve

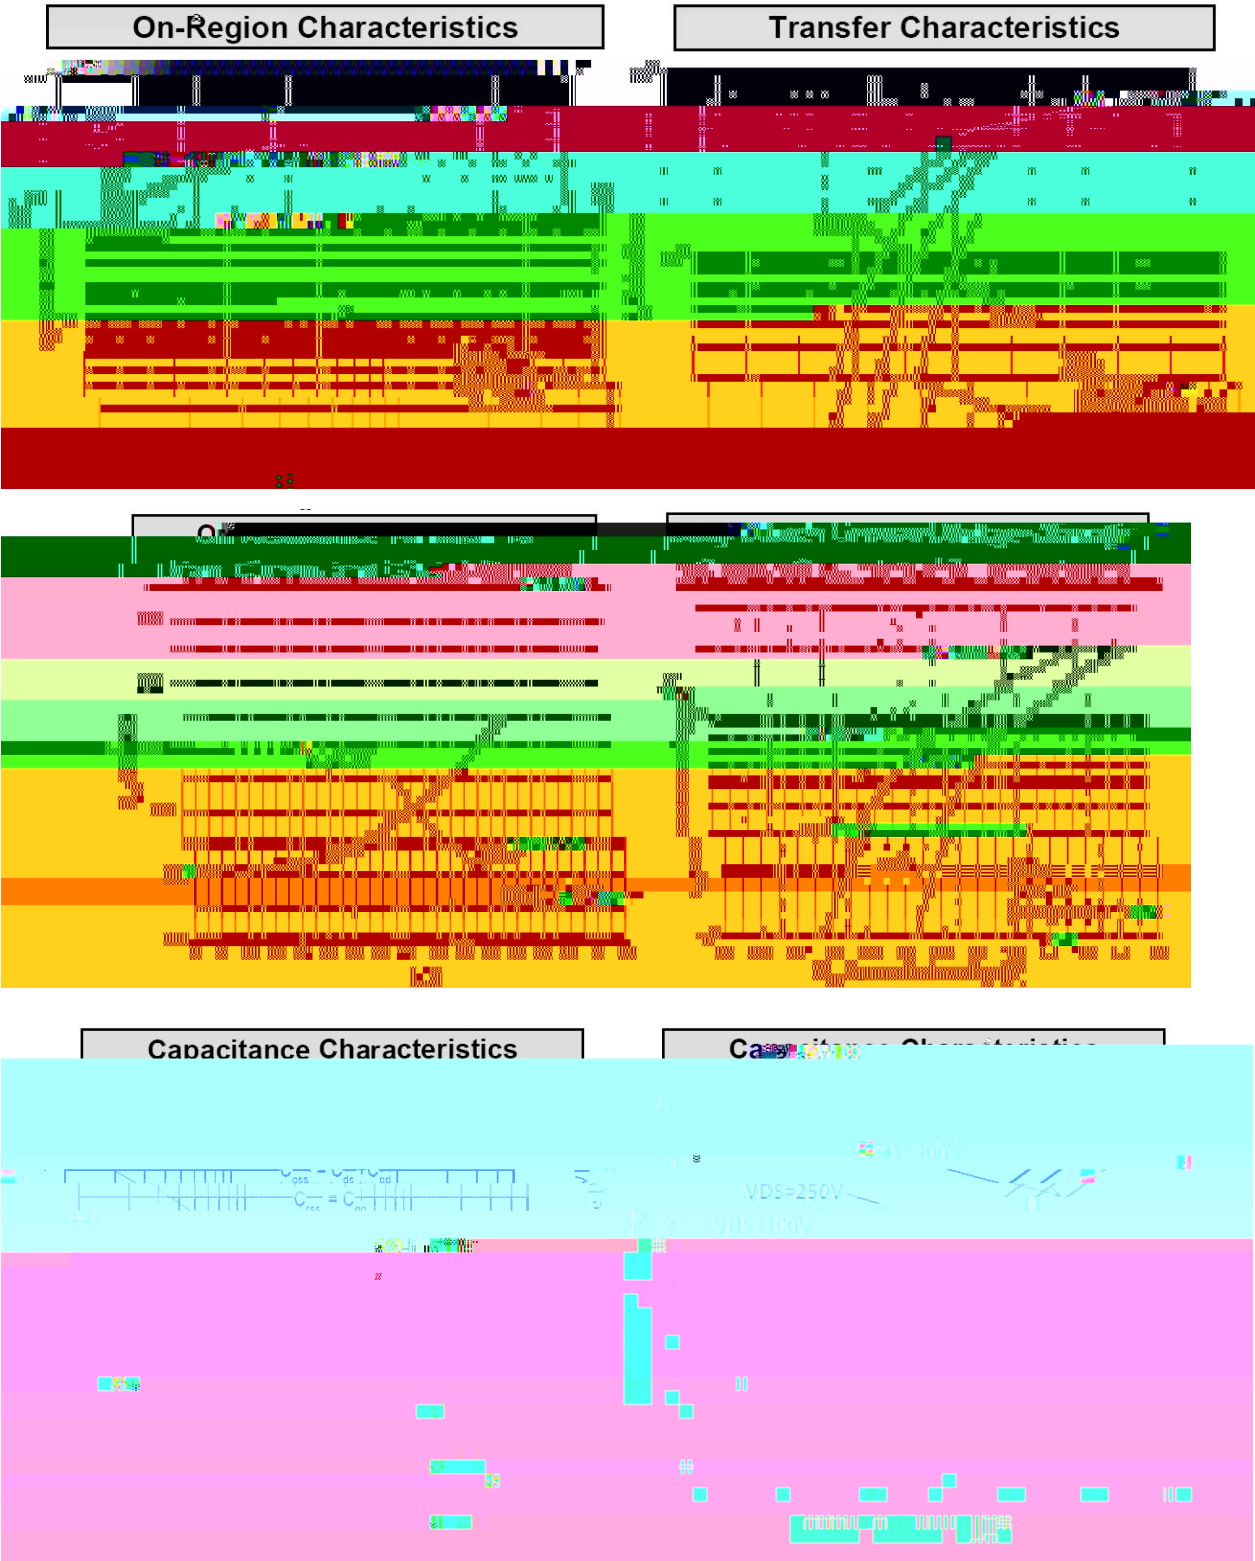


/ Electrical Characteristics(Ta=25)


Breakdown Voltage Variation

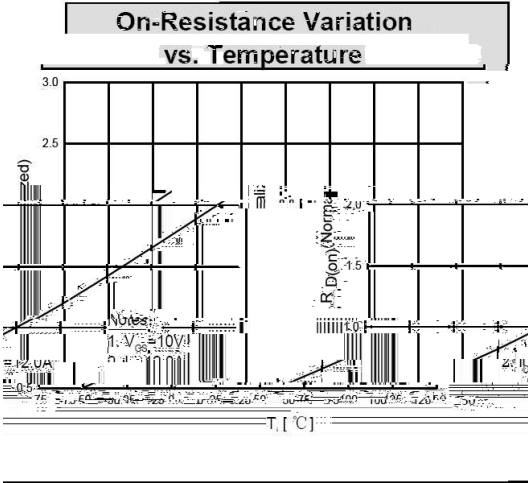


Maximum Safe Operating Area

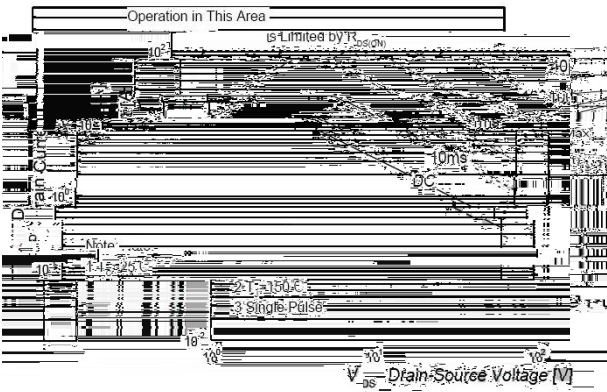


Transient Thermal Response Curve

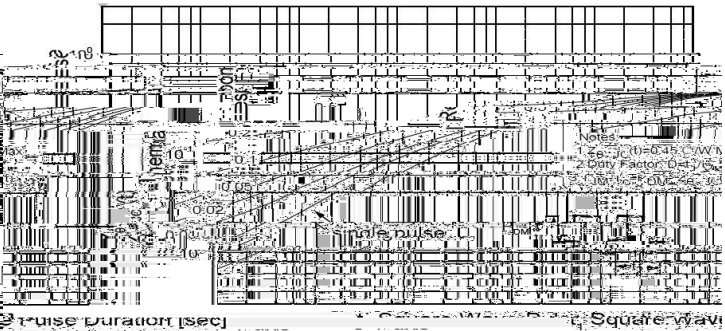

/ Package Dimensions

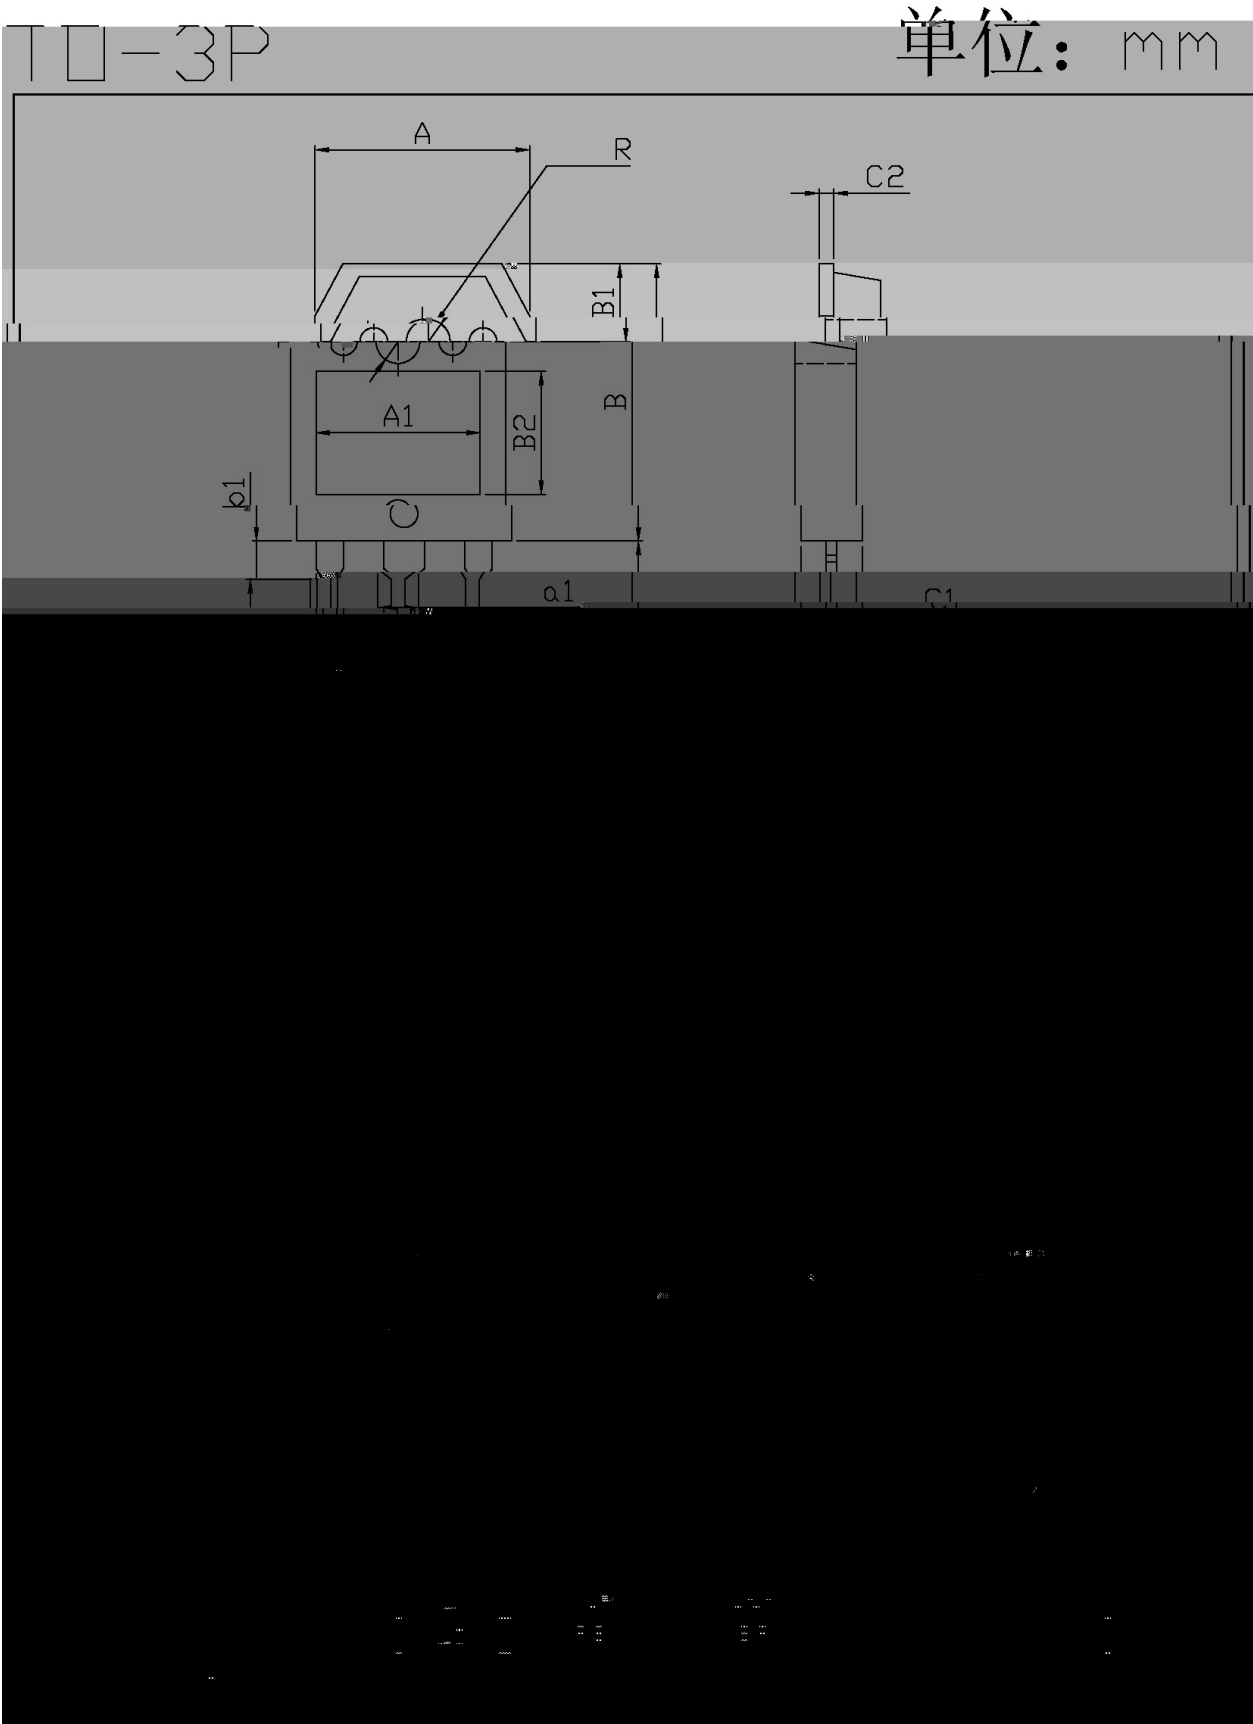

/ Marking Instructions

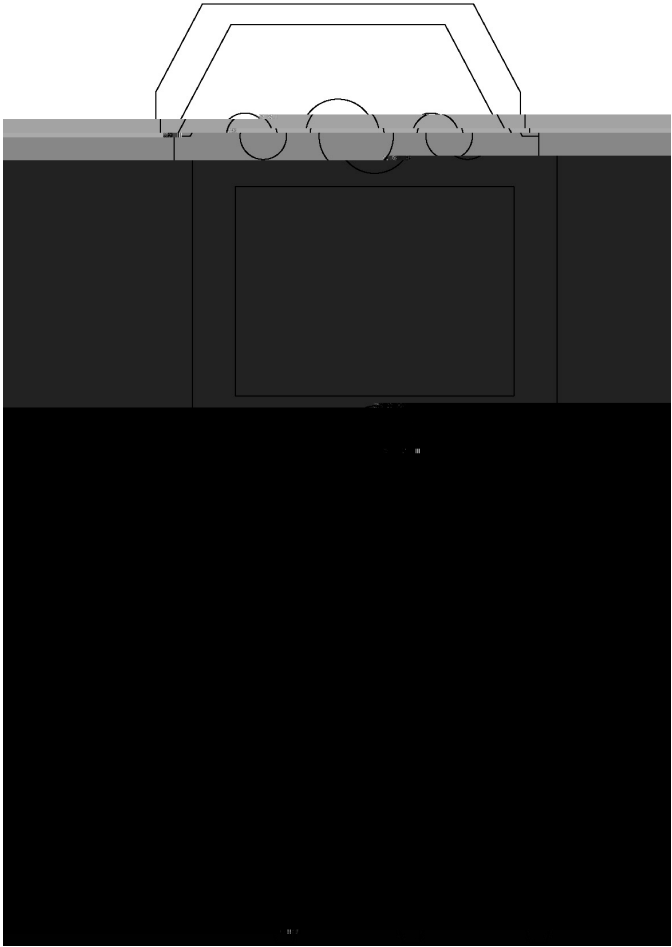

：

Page 10 of 10

 $\pm$ $\pm$

封装形式	已裝數量					已裝尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱