




A	2020.08.04		AOS-AON2405		
B	2021-8-23	8	3000 4000		
C	2022-3-7	2	特征栏 改为 ；		



	°C		
			°C
			°C
	≦		°C
			°C




--	--	--	--	--	--	--

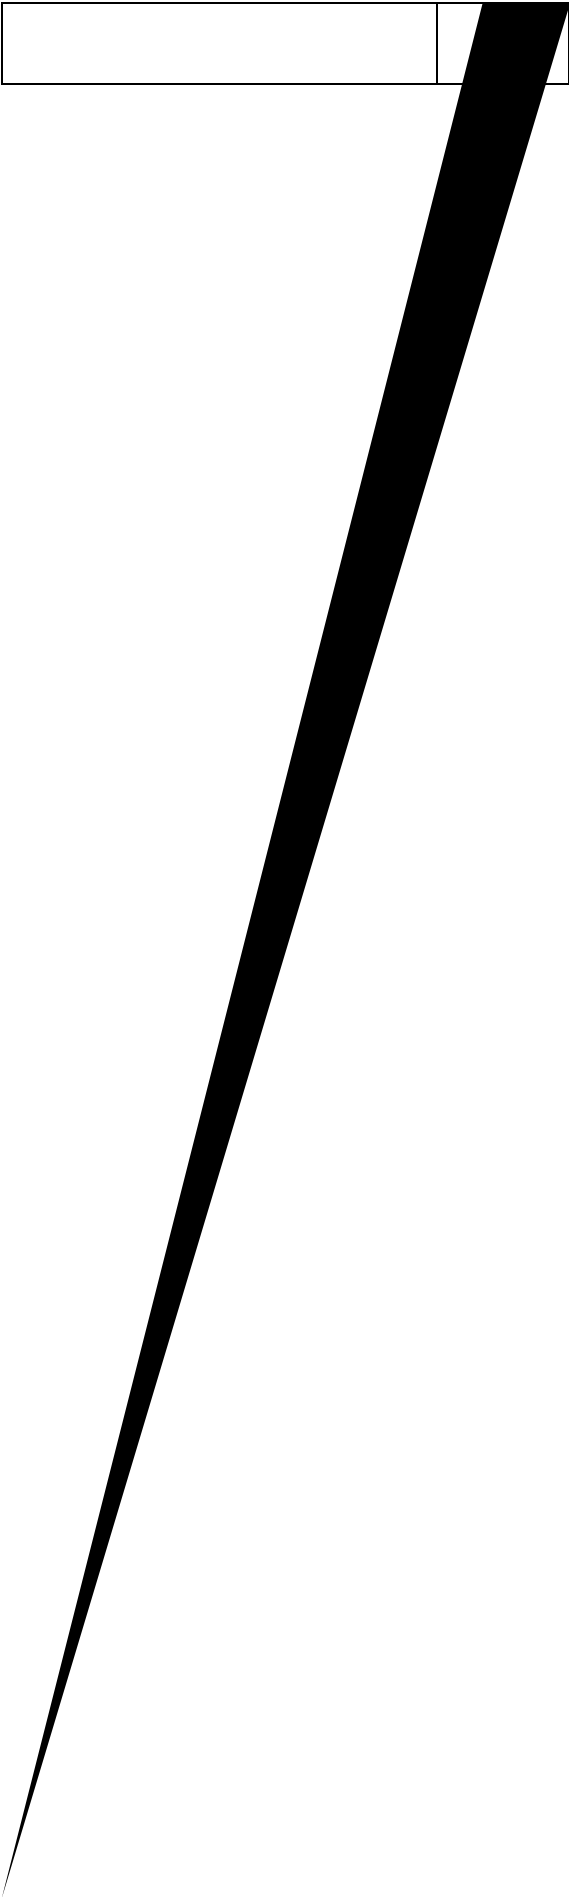




/ Electrical Characteristic Curve

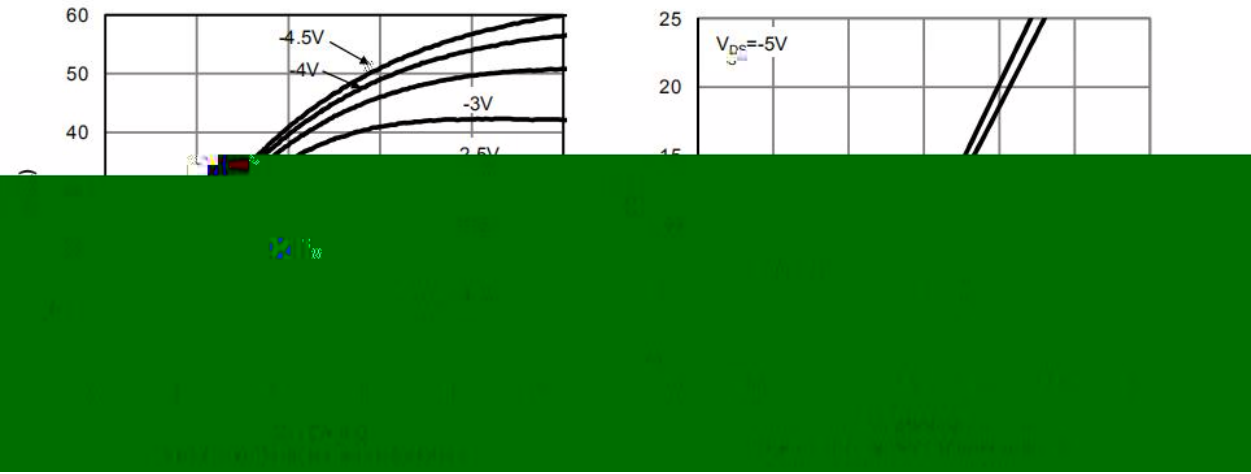



/ Electrical Characteristic Curve

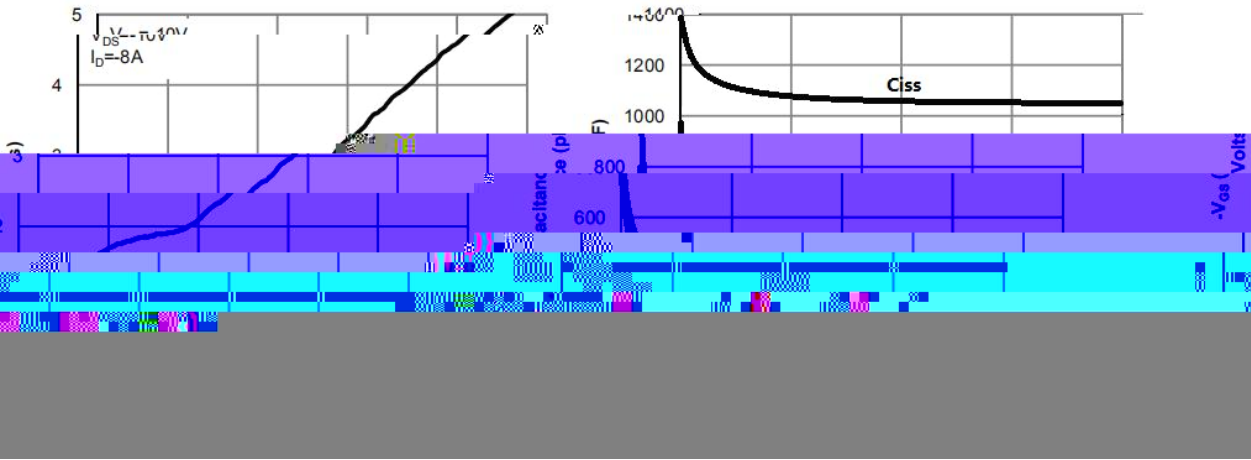


ent

10	$D = T_{on} / T$ $T_{J,PK} = T_C + P_{DM} \cdot Z_{thJC} \cdot R_{thJC}$	In descending order D=0.5 0.2 0.1 0.05 0.02 0.01 single pulses
----	---	---




• / Package Dimensions

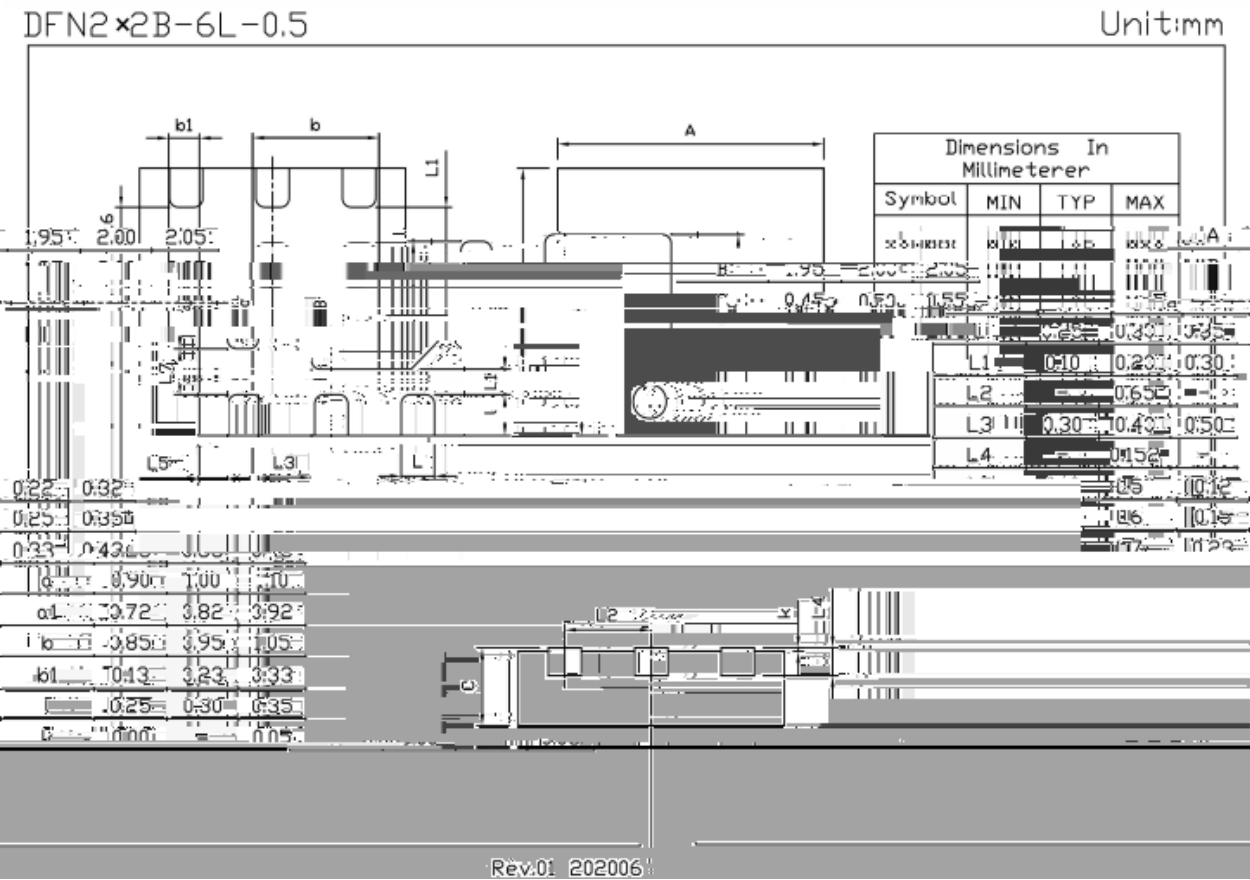



• / Marking Instructions

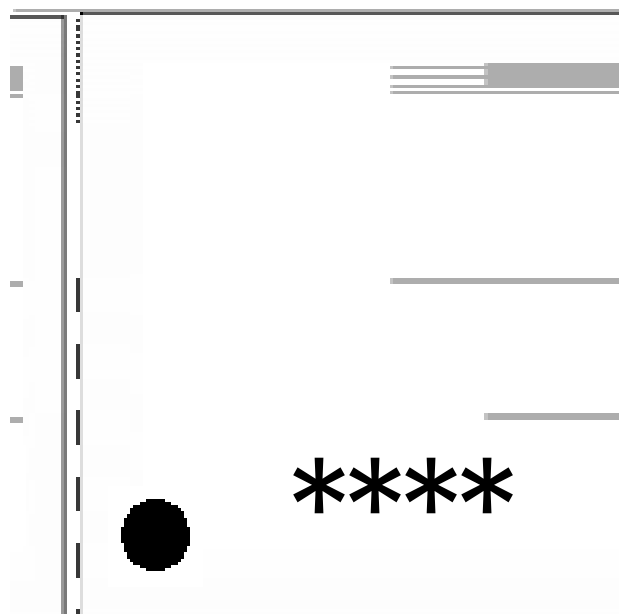

[illegible]
$$\begin{array}{ccccc} & & & & ^\circ\text{C} \\ \pm & & \pm & & \pm \\ & & & & ^\circ\text{C} \\ & ^\circ\text{C} & & & ^\circ\text{C} \end{array}$$

/ P Resistance to Soldering Heat Test Conditions /

$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$