

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit






/ Pinning

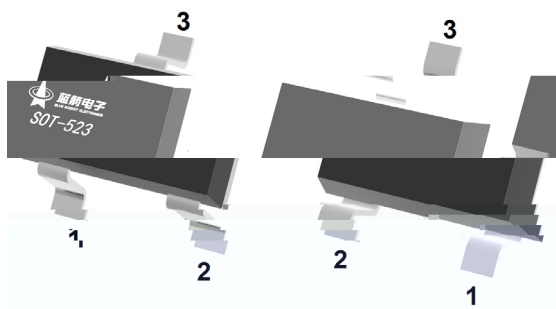


/ Marking

/ Electrical Characteristic Curve

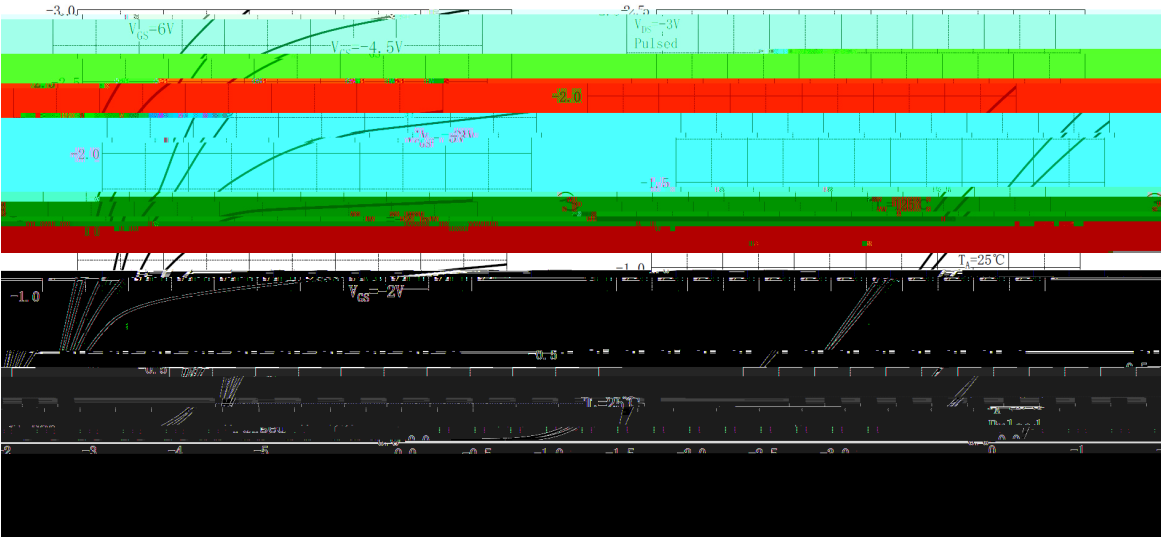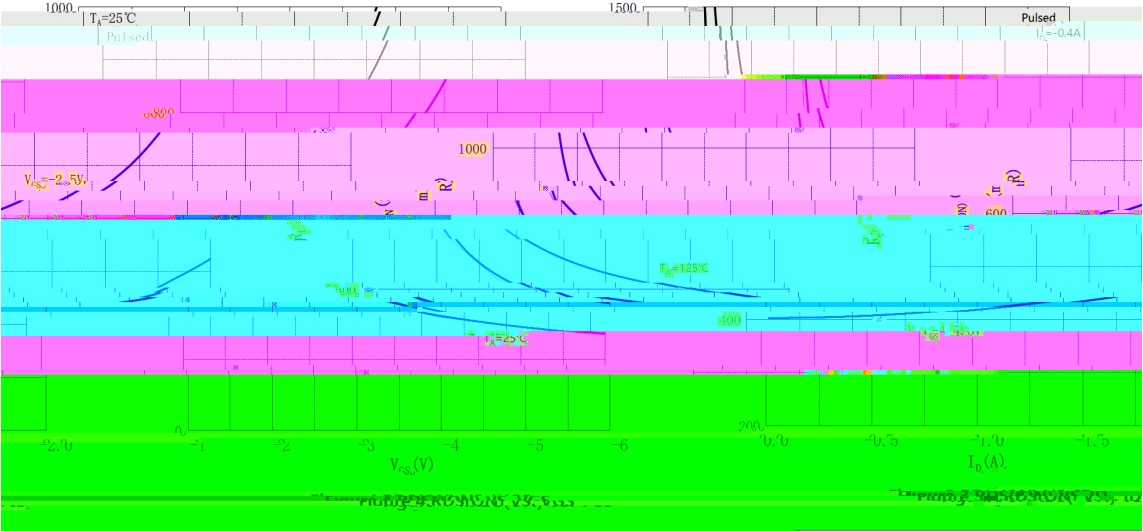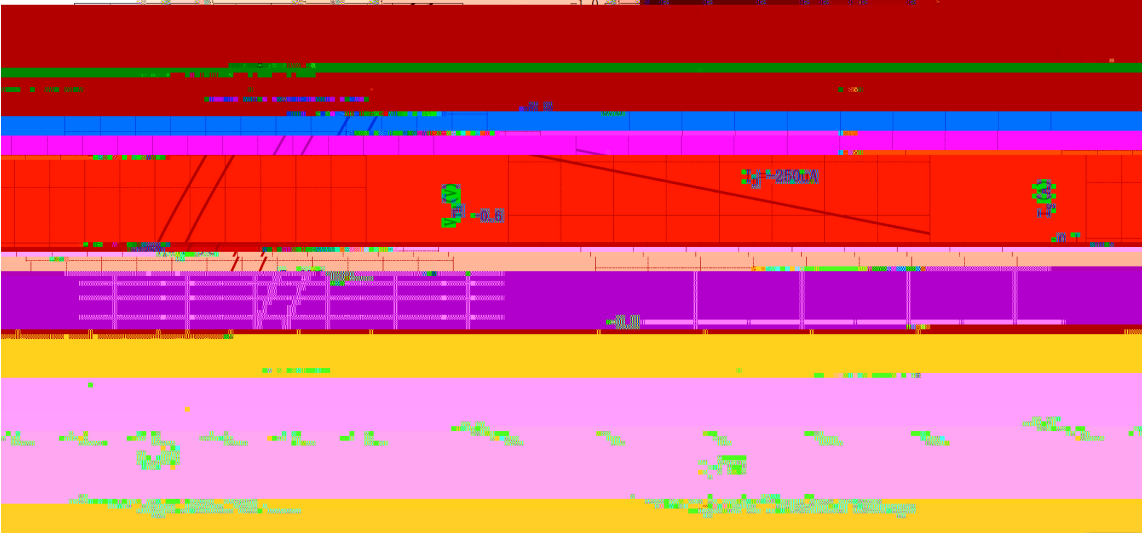


/ Package Dimensions

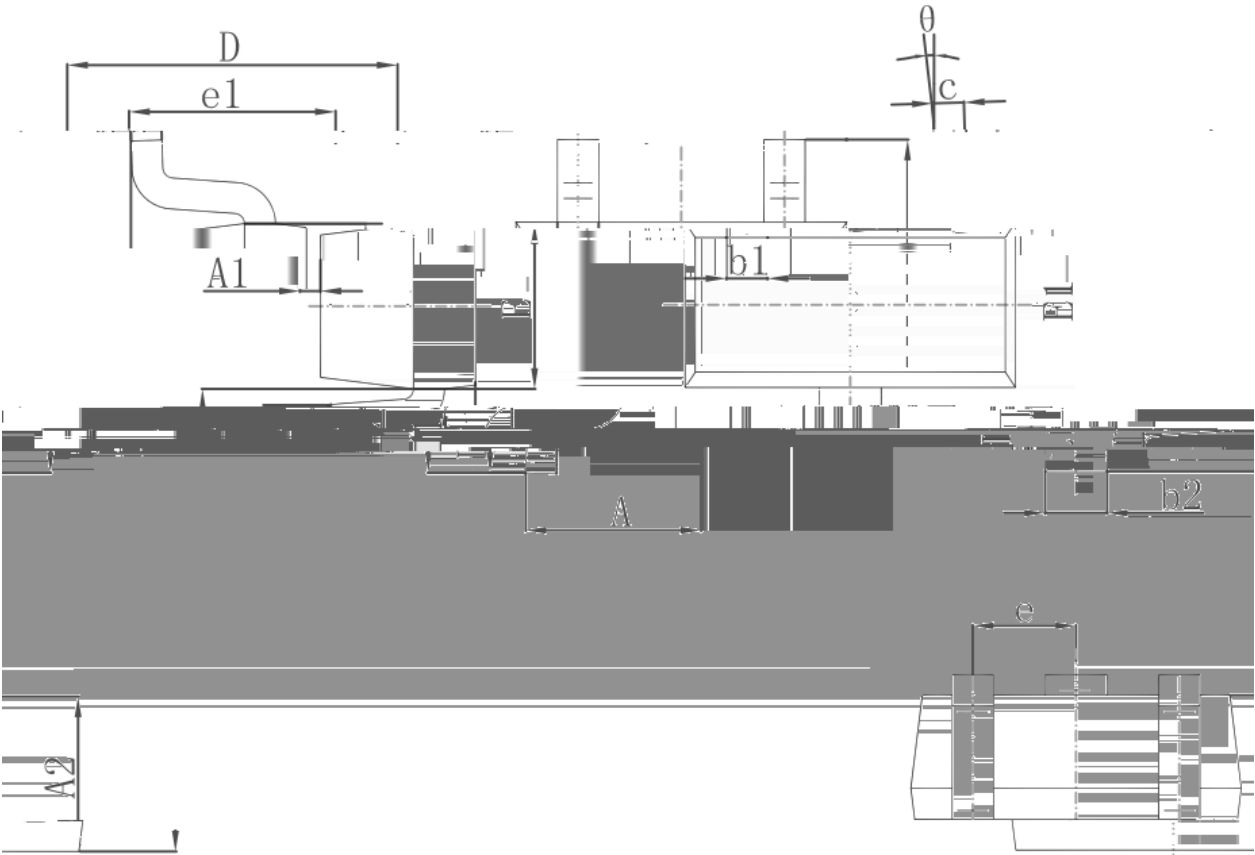

Dimensions In Millimeters		Dimensions In Inches		Symbol	Dim
Min.	Max.	Min.	Max.		
0.700	0.900	0.028	0.035	A	0.000
0.800	0.028	0.031	A2	0.700	0.004
0.250	0.11°	0.005	0.11°	A3	0.250
0.250	0.039	0.003	0.11°	A3	0.250
0.200	0.004	0.008	e	0.100	0.000
1.700	0.067	0.007	0.000	0.700	1.700
0.035	0.057	0.069	E	0.900	0.02
0.020 TYP.	0.035	0.043	e	1.450	1.750
0.016 REF.	0.010	0.018	e1	0.500 TYP.	
0°	8°	0°	L	0.400 REF.	
			L1	0.260	0.460
			theta	0°	8°

/ Marking Instructions

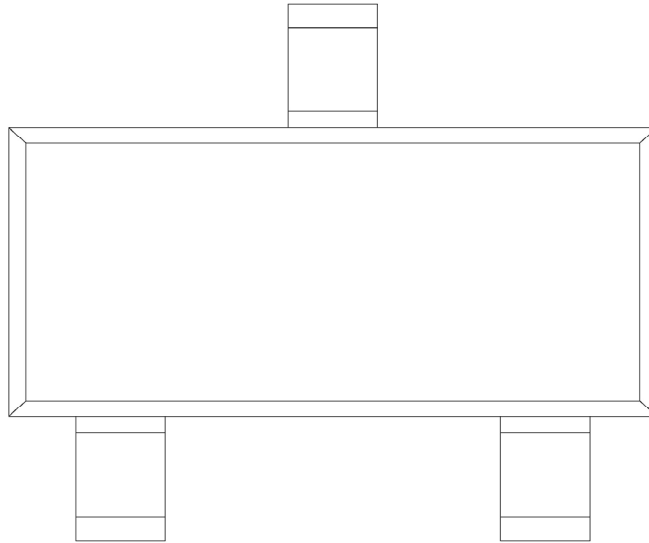

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.