

/ Descriptions

MM E S 3 J 0 Z 1


/ Features

$\Omega$   
 $\Omega$   
 $\eta$  F  $\beta$


/ Applications

Q 5 A H 1 3 - 3 I  
I

/ Equivalent Circuit



/ Pinning

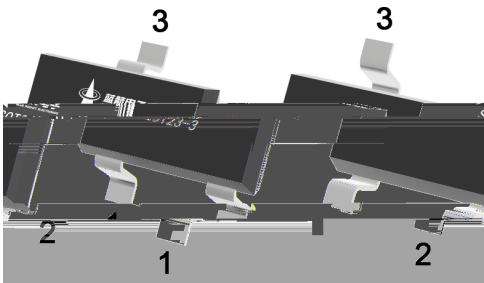

X X X


/ Marking

|  |  |
|--|--|
|  |  |
|--|--|


| Ƶ "Q | Ƴ N | "Q Ө | D H |
|------|-----|------|-----|
|      |     |      |     |
|      |     |      |     |
|      |     |      |     |

/ Electrical Characteristic Curve

/ Electrical Characteristic Curve

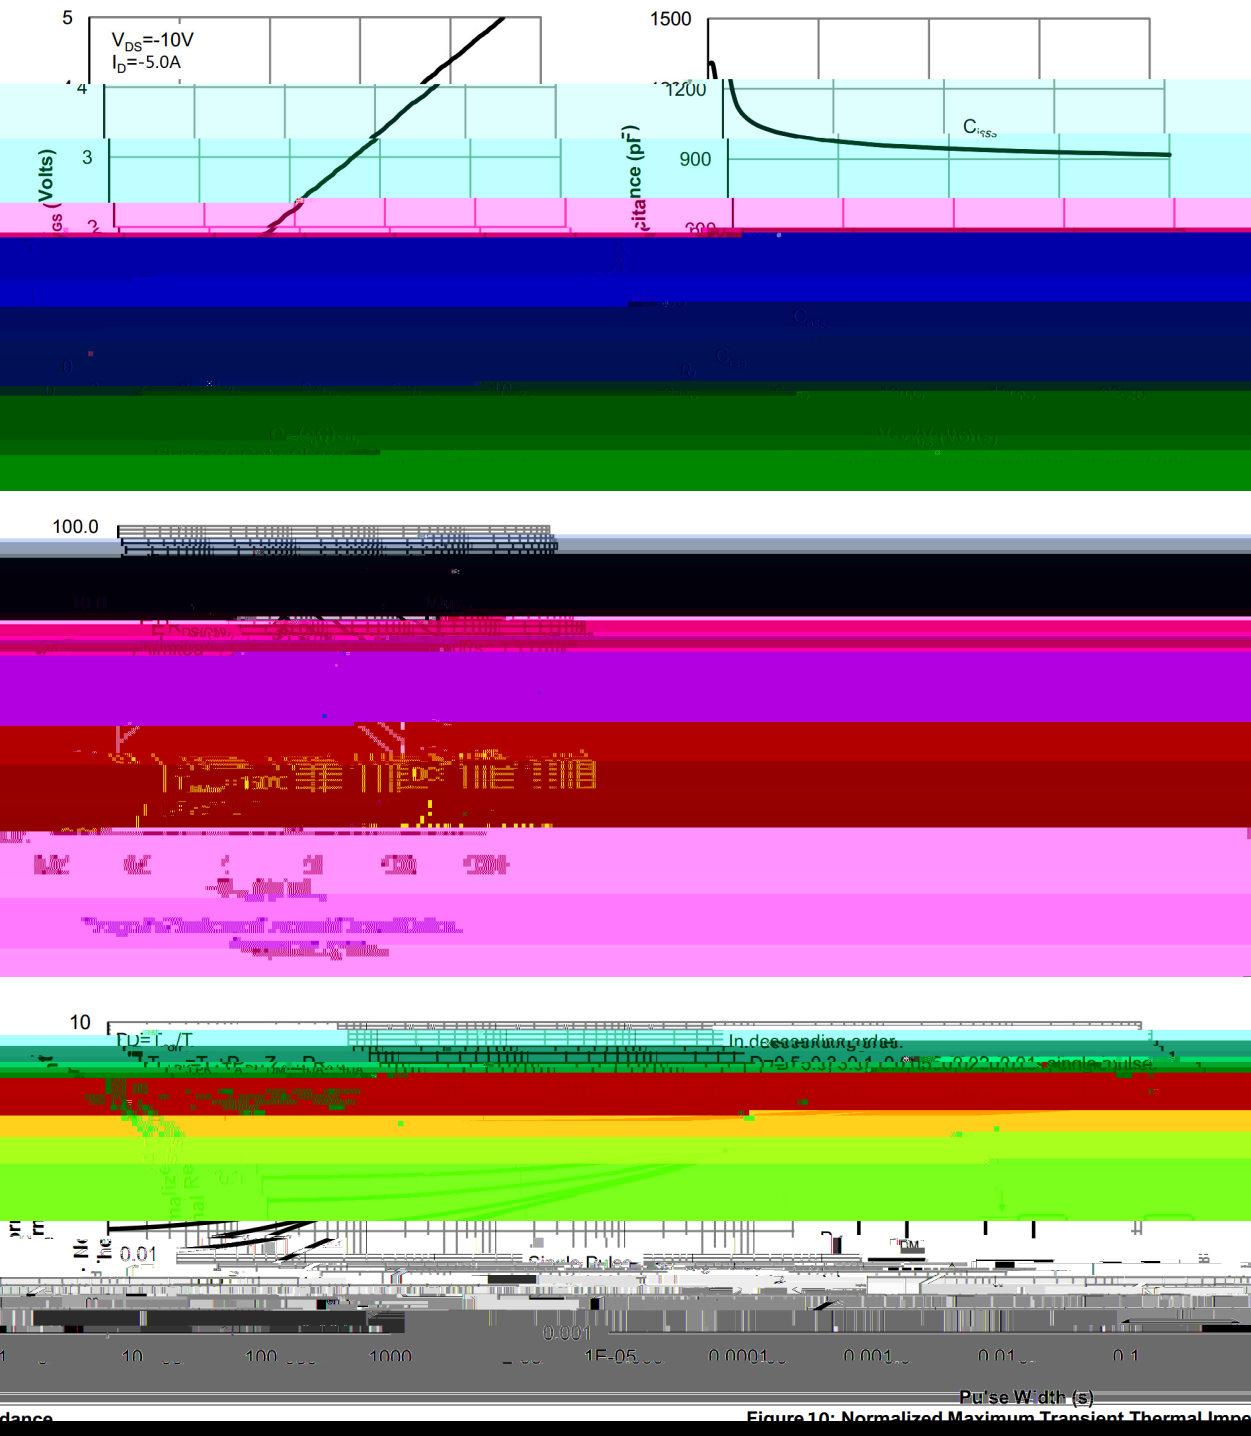


/ Package Dimensions

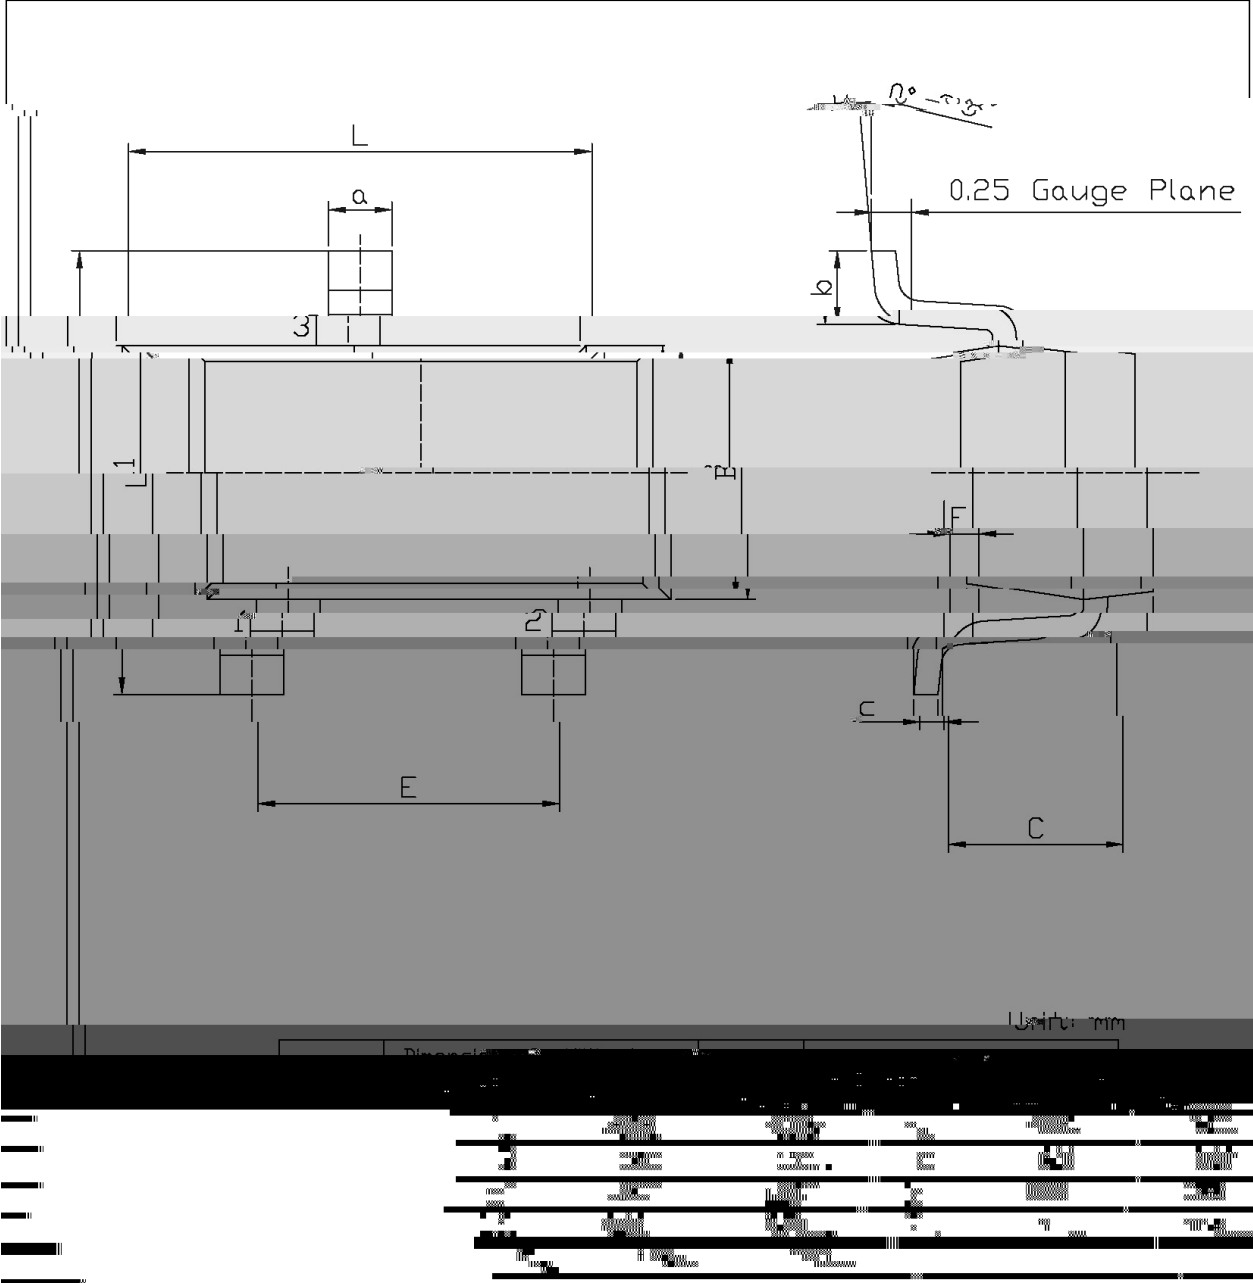

BRCS3415MC

/ Marking Instructions

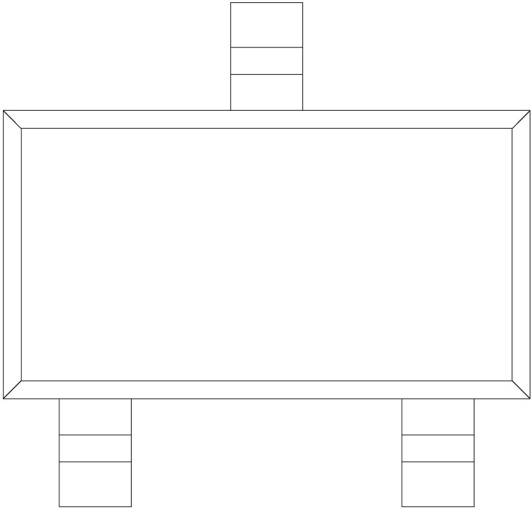

“ X

3<sup>1</sup> 7

3<sup>N</sup> 7

X

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

1. 温度曲线  
2. 温度曲线  
3. 温度曲线  
4. 温度曲线  
5. 温度曲线  
6. 温度曲线  
7. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线  
2. 温度曲线

/ Packaging SPEC.

1. 温度曲线