/ Descriptions

P

/ Features

AEC-Q101

/ Applications

PWM

/ Equivalent Circuit



/ Pinning

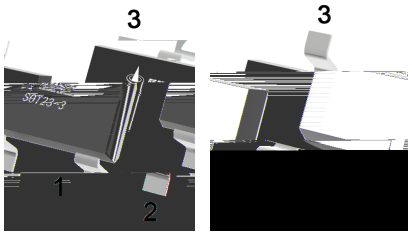

/ Marking

/ Electrical Characteristic Curve

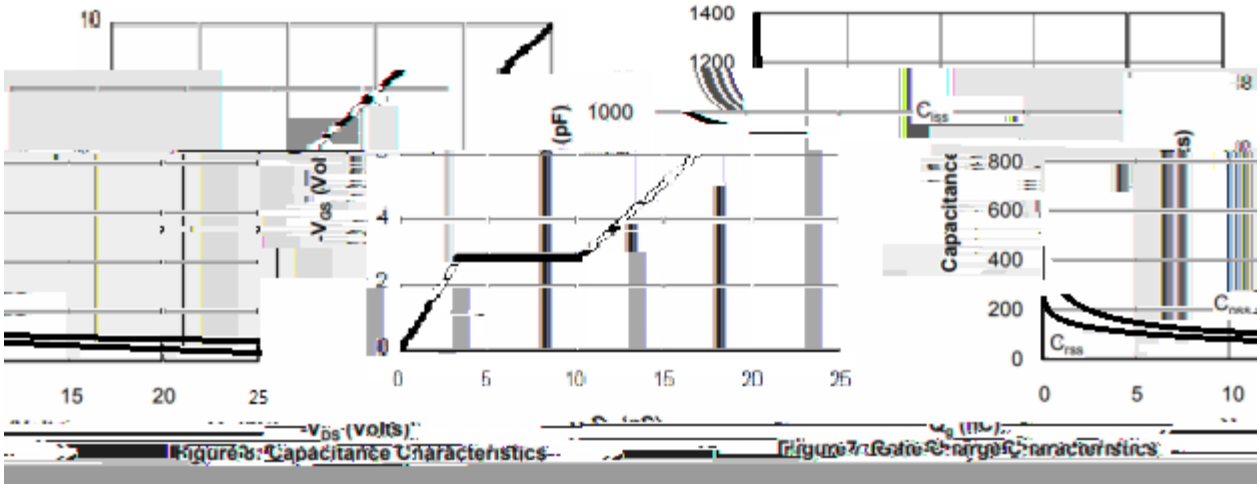

Figure 6: Capacitance Characteristics

Figure 7: Gate Charge Characteristics

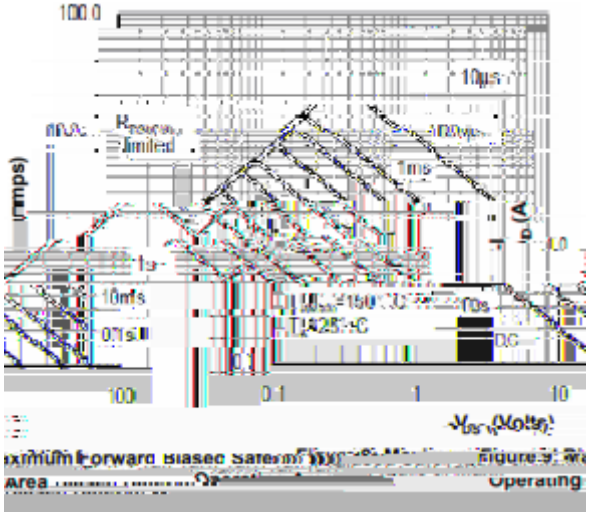

Figure 8: Maximum Forward Biased Safe Operating Area

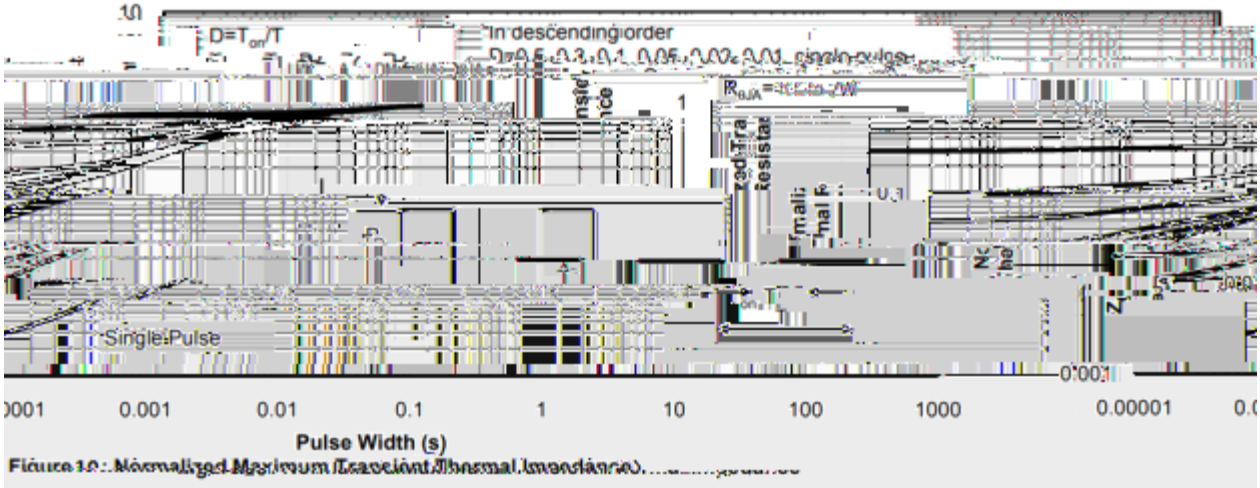

Figure 10: Normalized Maximum Transient Thermal Impedance

BRCS5P06MCQ

DATA SHEET

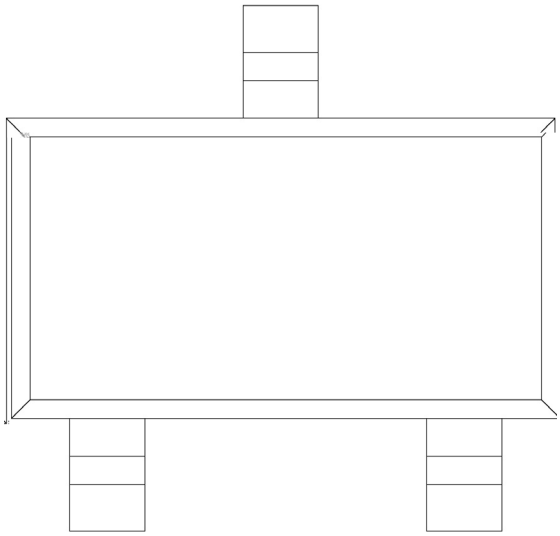

( ) /

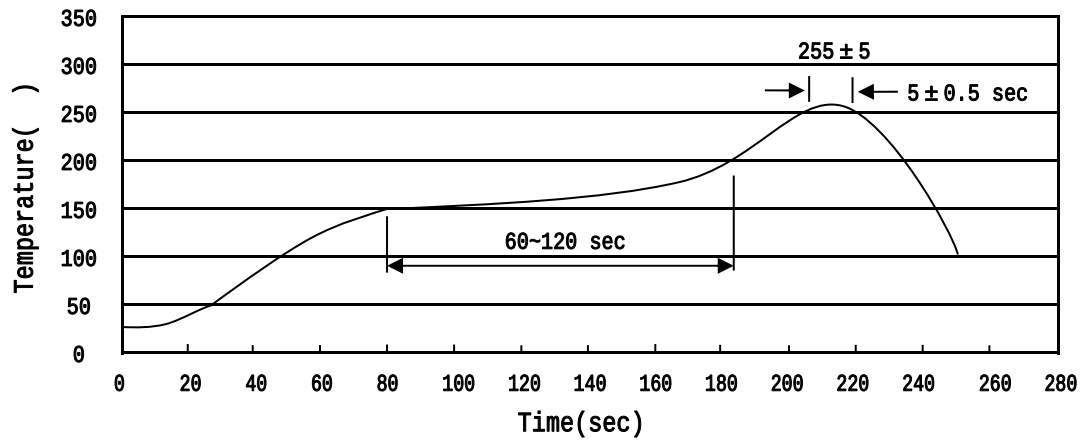

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices