


BRD65R380C

Rev.B May.-2022



DATA SHEET


BRD65R380C

Rev.B May.-2022

DATA SHEET

BRD65R380C

Rev.B May.-2022



DATA SHEET

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	650	V
Drain Current	$I_D(T_c=25^{\circ}C)$	11	A
Drain Current - Pulsed	I_{DM}	44	A
Gate-Source Voltage	V_{GS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	277	mJ
Avalanche Current	I_{AS}	8	A

h


Power

я

n

BRD65R380C


Rev.B May.-2022



DATA SHEET

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Diode Forward Current	I_S				11	A
Total Gate Charge	Q_g	$V_{DS}=480V \quad I_D=5.5A$ $V_{GS}=10V$		19.2		nC
Gate-Source Charge Q_{gs}	Q_{gs}			C	1	nC
Gate-Drain Charge	Q_{gd}			8.2		nC
Reverse Recovery Time	t_{rr}	$V_R=400V, I_F=5.5A,$ $dI_F/dt=100A/\mu s$		310		ns


/ Electrical Characteristic Curve

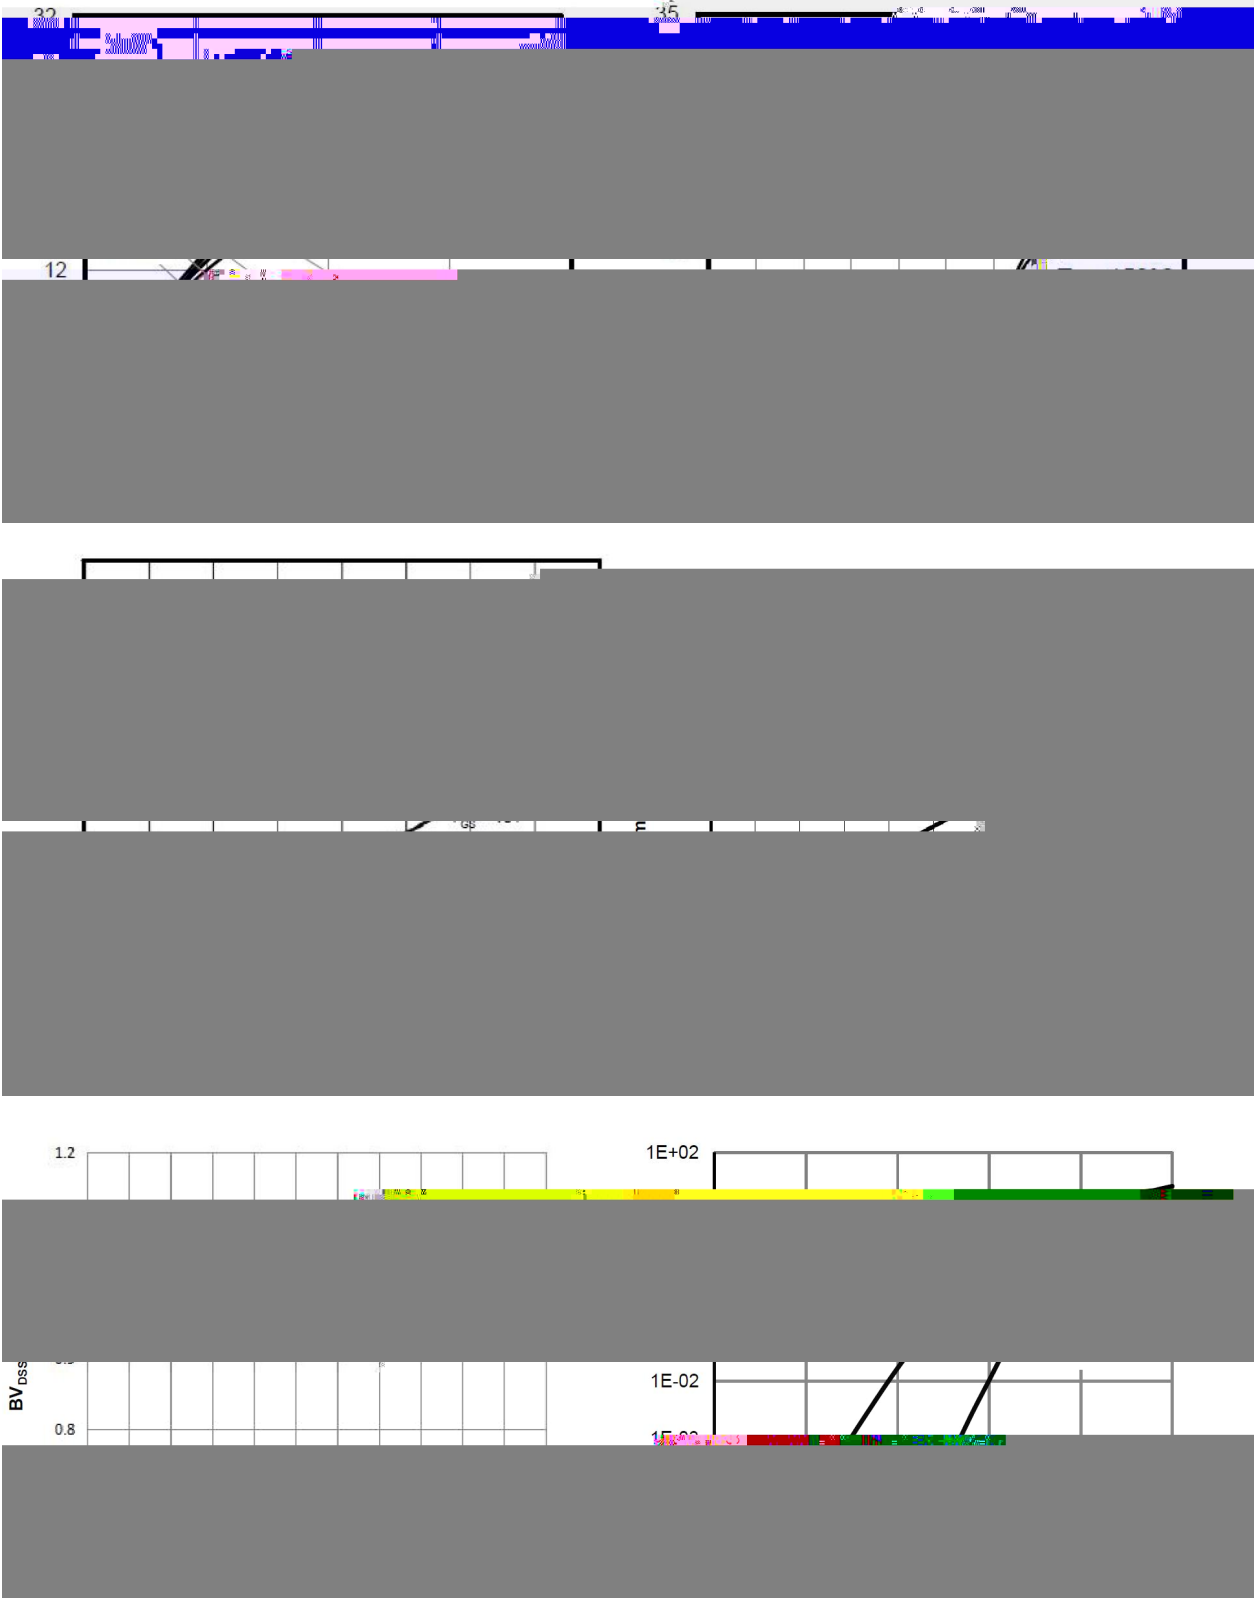


/ Electrical Characteristic Curve



/ Package Dimensions

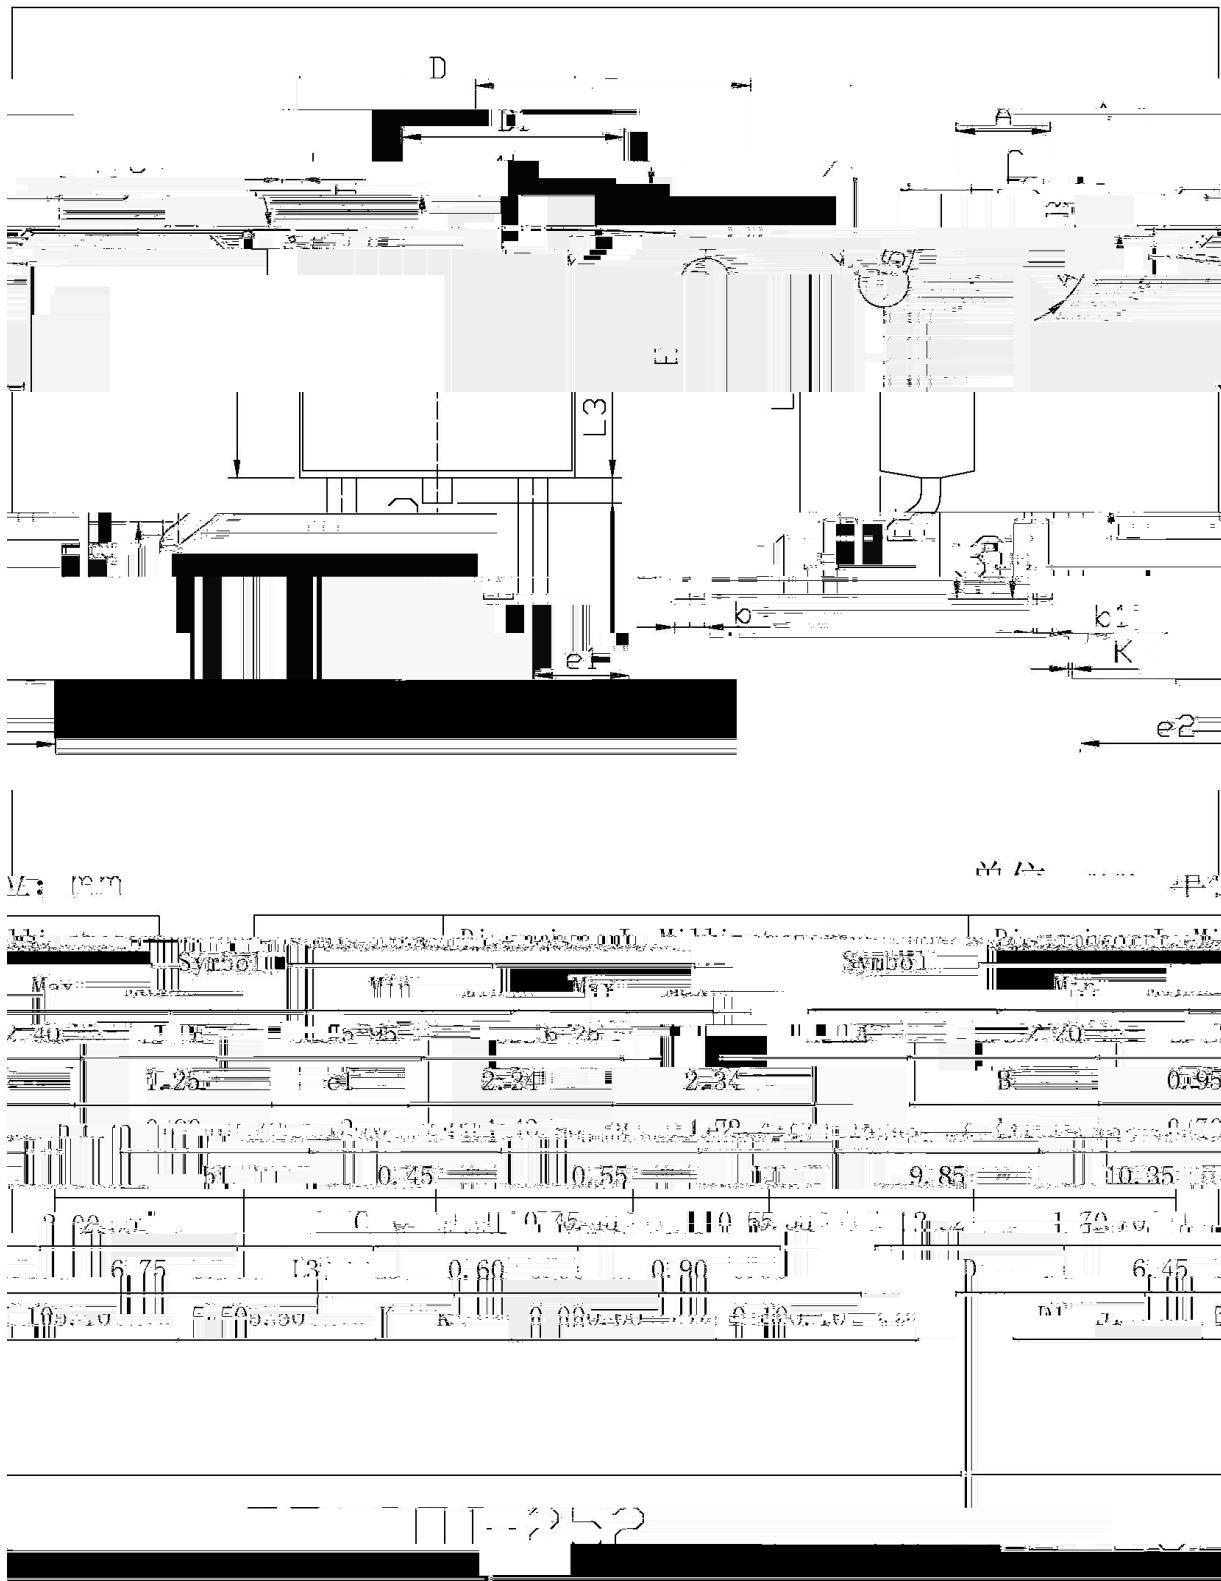

/ Marking Instructions

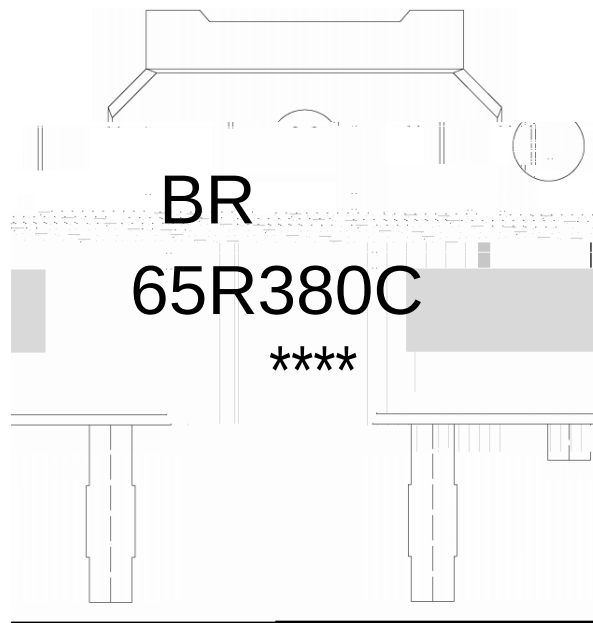

BR

65R380C

Note:

BR: Company Code

65R380C: Product Type Code

****: Lot No. Code, code change with Lot No

() /

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱