


!"#\$%&
!"#\$%&'()* (##### ' ('%) ** (

+&& ,-. / / /!0123 %!%45## # # # # # # # # # # # # # # #4#.#5




!"#\$%&
!"#\$%&'()*##### '(&%)**(
#

&

#	#	#	#
:;3;5 & 3#	<C5 247#	; &8A#	R8&&#
B477 %&43#&4#" ;1 #S47&;A #	S _B "\$#	M)#	S#
B477 %&43#&4#N5&& 3#S47&;A #	S _{BN} \$#	(F#	S#

!"#\$%&
!"#\$%&'()*##### '(&%)**(&



!"#\$%&

!"#\$%&'()*##### '(&%)**(&

#

&&+&&E:2@:A,& .I ,=/3=/&

#

SOT-363-6I




E	1.95	2.25
F	0.20 Typ	




L	0.535 Def
---	-----------





!"#\$%&'()*+,-./:;<=>?@A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` { | } ~ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿

J L&+&& Temperature Profile for IR Reflow Soldering(Pb-Free)

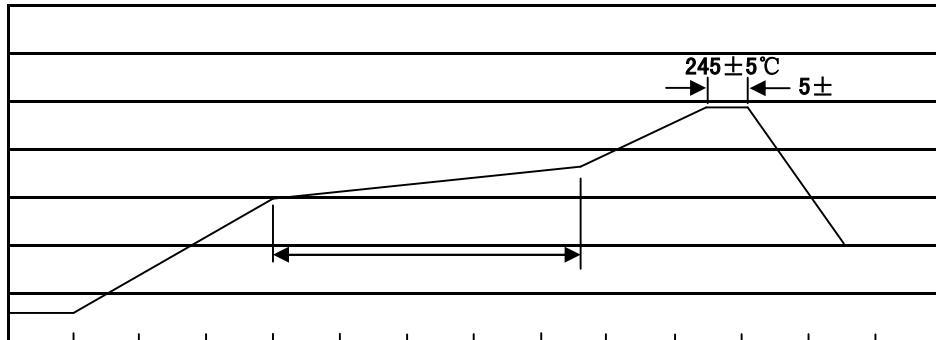

94# #
* *F) *E) ?)]1 %c# # # *! :3 + ;&8A-*F)O*E)°Ca#=#5 -?)O])1 %!#
((MF±F F±)!F1 %c# # (! : ;@# = 5 ,!-(MF±F°Ca#DK3 ;&48-F±)!F1 %!#
> (*)°C.1 %!# # # # >! B447&8A#<, J-#(O*)°C.1 %!#
#

&&+&&& , /.<:=2,&<3&%390,1.=A&) , :<&(, /<&83=0.<.3=/&

(?)±F°C# # *)±*#1 %!# # # # = 5 ,!-(?)dF°C# # =65 -*)d*#1 %#

&&+&&& E:2@:A.=A&%E*8P&

##.## NN`#

: ;%@;A #=C, # #	R8&1 #					D65 81&48# # [K8& 5 5`#		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT-363	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

&&+&&& Q3<.2, /&