



TO-220F MOSFET N-CHANNEL MOSFET in a TO-220F Plastic Package.

Low gate charge, low crss, fast switching.

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.




PIN 1 G

PIN 2 D

PIN 3 S

See Marking Instructions.

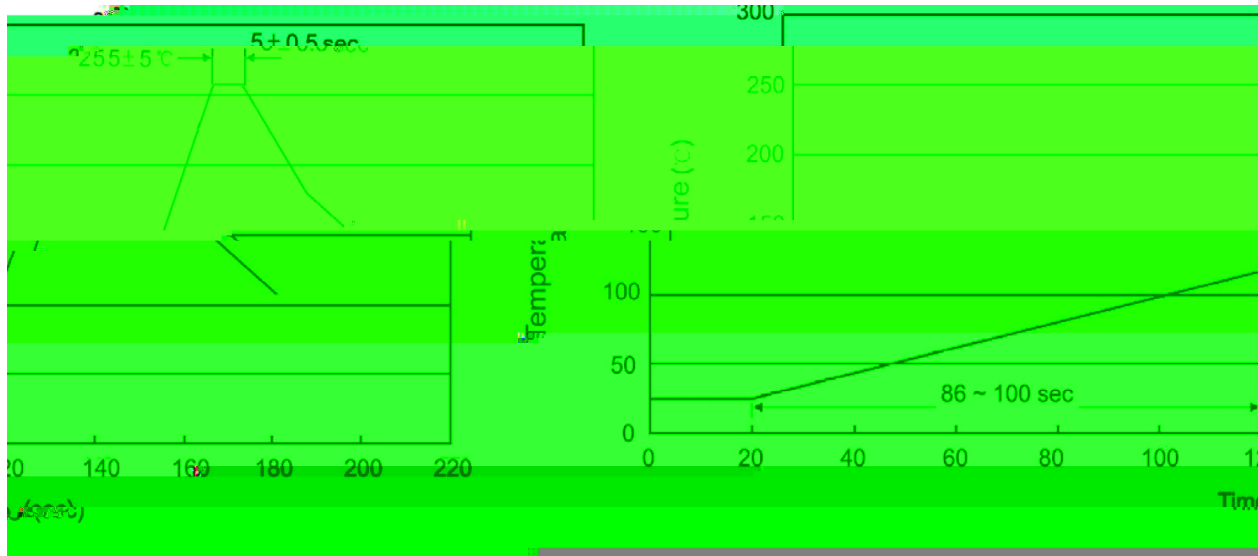

1. 25~150 °C

2. 255±5 °C

3. 2~10 °C/sec

Note:

1. Preheating: 25~150 °C, Time: 60~90sec.

2. Peak Temp.: 255±5 °C, Duration: 5±0.5sec.

3. Cooling Speed: 2~10 °C/sec.

270±5 °C

10±1 sec.

Temp.: 270±5

Time: 10±1 sec

QTY / BULK

Package Type	Units		Dimension (unit mm ³)
	Units/Bag	Bags/Inner Box	