


描述 / Descriptions

650V


特点 / Features

应用 / Applications

等效电路 / Equivalent Circuit



引脚 / Pinning

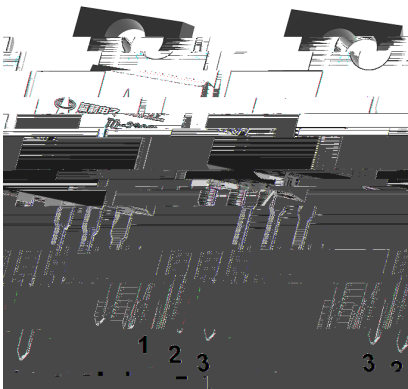

标记 / Marking

绝对最大值 / Absolute Maximum Ratings(Ta=25 ℃)




	Id		
	Id		

电 气 特 性 / Electrical Characteristics(Ta=25 ℃)




		ε				
						ε
		ε				
						q
						q
		q				

电 阻 器 / Electrical Characteristics(Ta=25 ℃)

		ε				

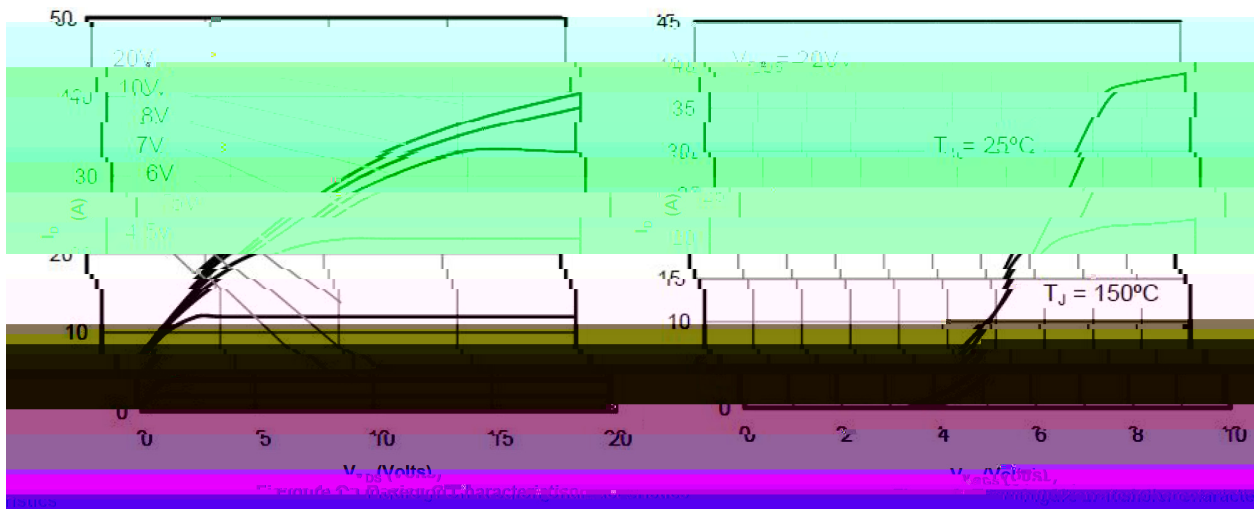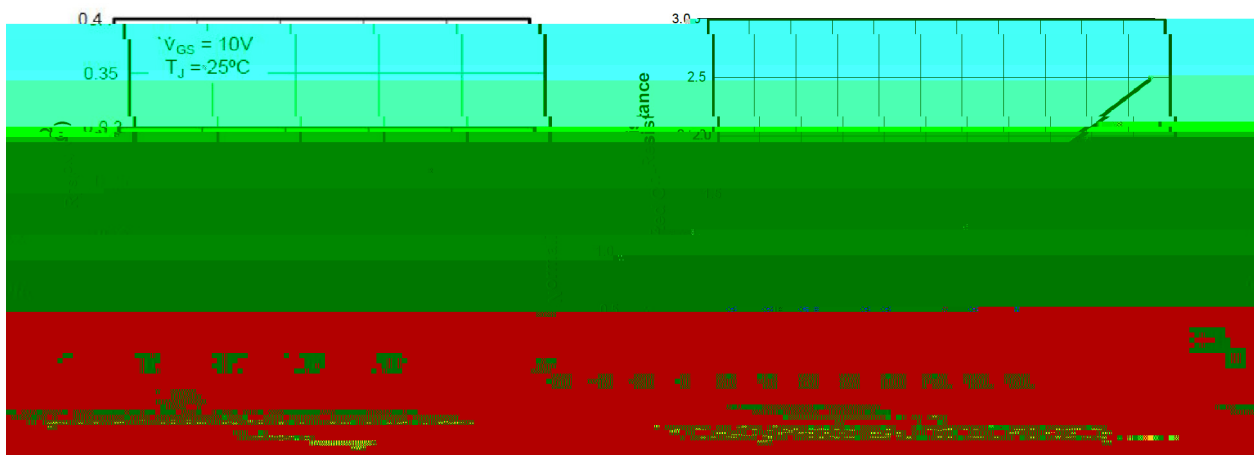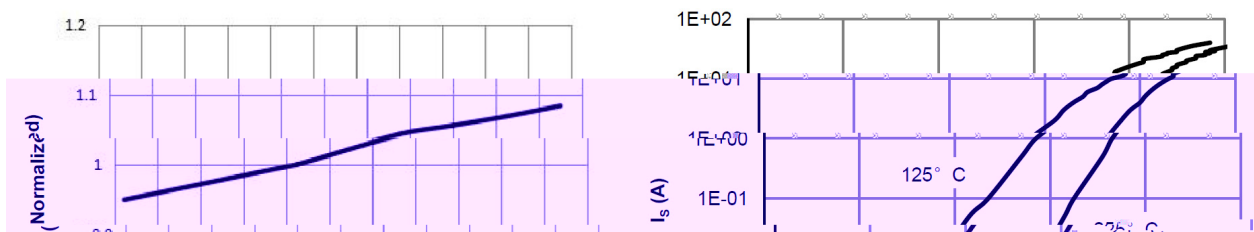 Electrical Characteristic Curve


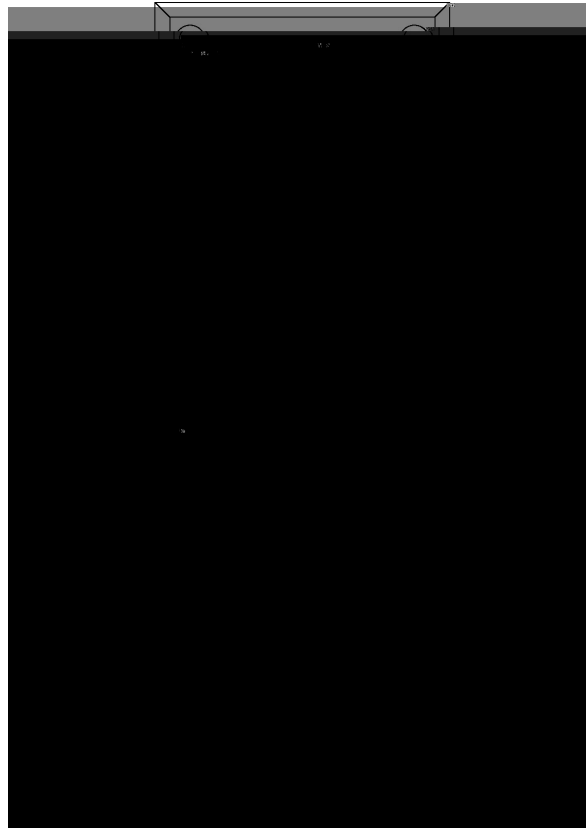
Electrical Characteristic Curve

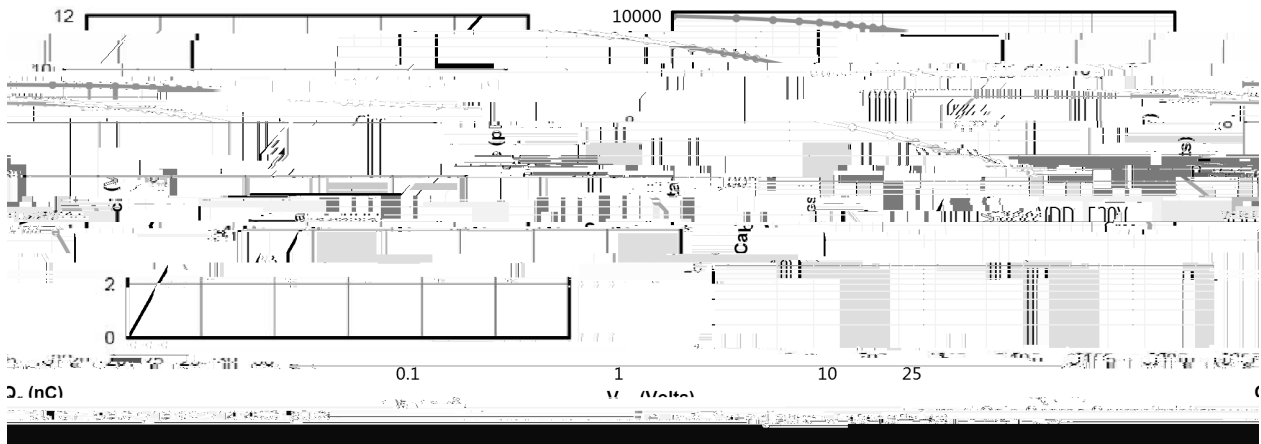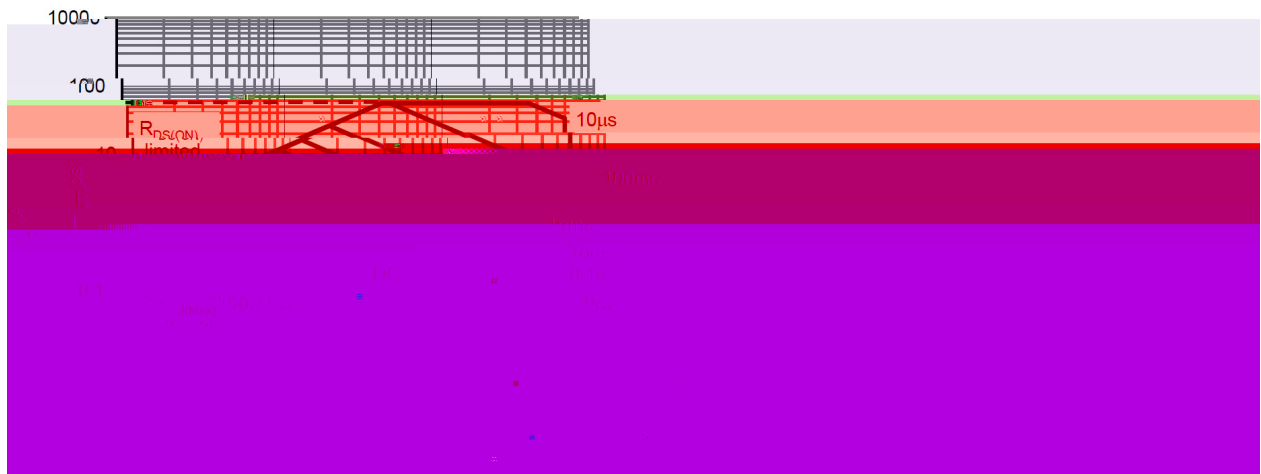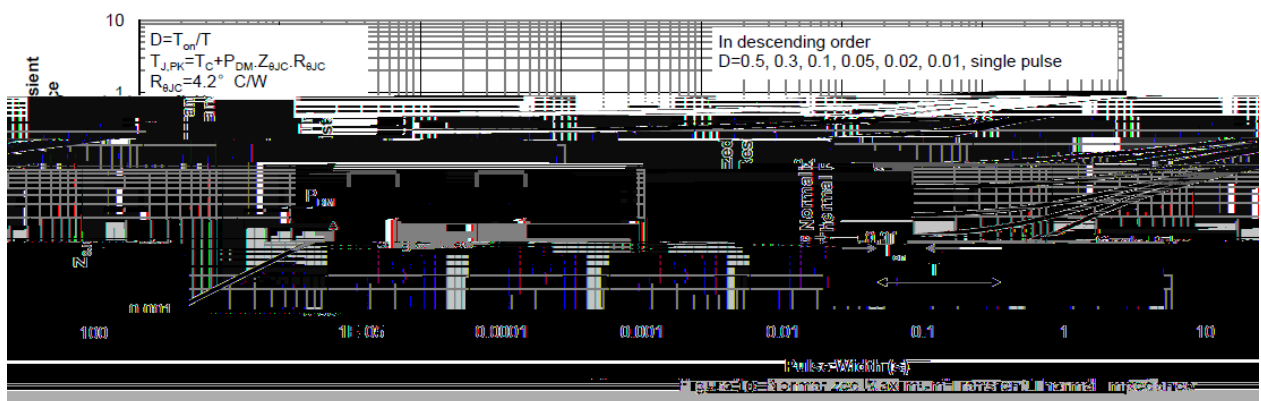

BRFL65R280T




4. 1. 1. / Marking Instructions



65R280T

Temperature Profile for Dip Soldering(Pb-Free)

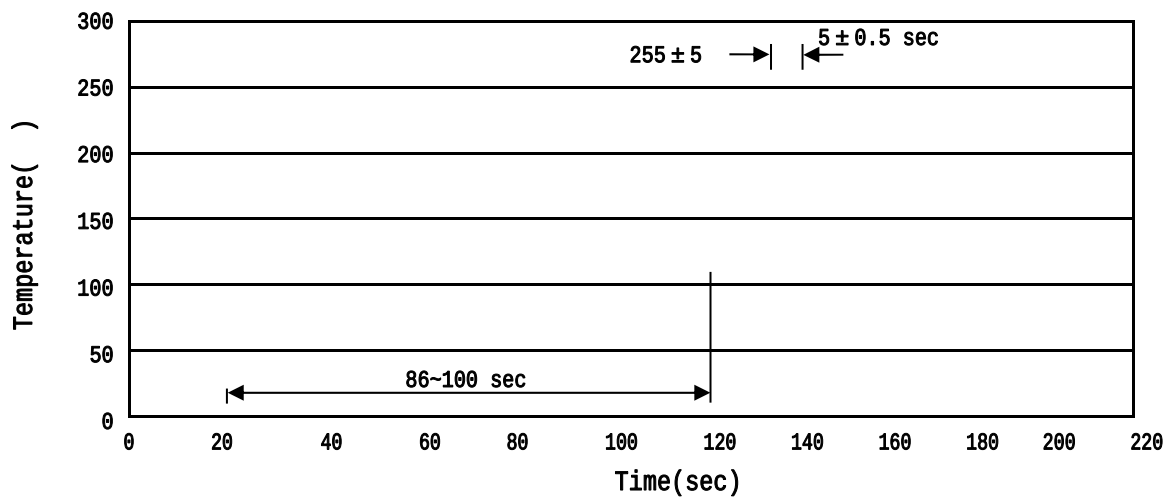 $\pm$ $\pm$ $\pm$ $\pm$

4.5 Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

📄 📏 📦 / Packaging SPEC.

ä v L"Ω / Notices