


(.((/012/3(4/5643((



A	2019.12.10		SOT-363		
A	2021-2-2	all	BR3RC5211WS BRMUN5211WS		
B	2021-11-25	4			


(

Parameter	Symbol	Rating	Unit
Output Voltage	V_{CC}	50	V
Input Voltage	V_{IN}	40	V
		-10	V
Output Current	I_{CM}	100	mA
	I_O	50	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range			





((.((- ; / 5 > 4 1 5 < ; (: 8 < 4 < 5 > / 4 1 2 > 1 5 (: D 4 0 / (

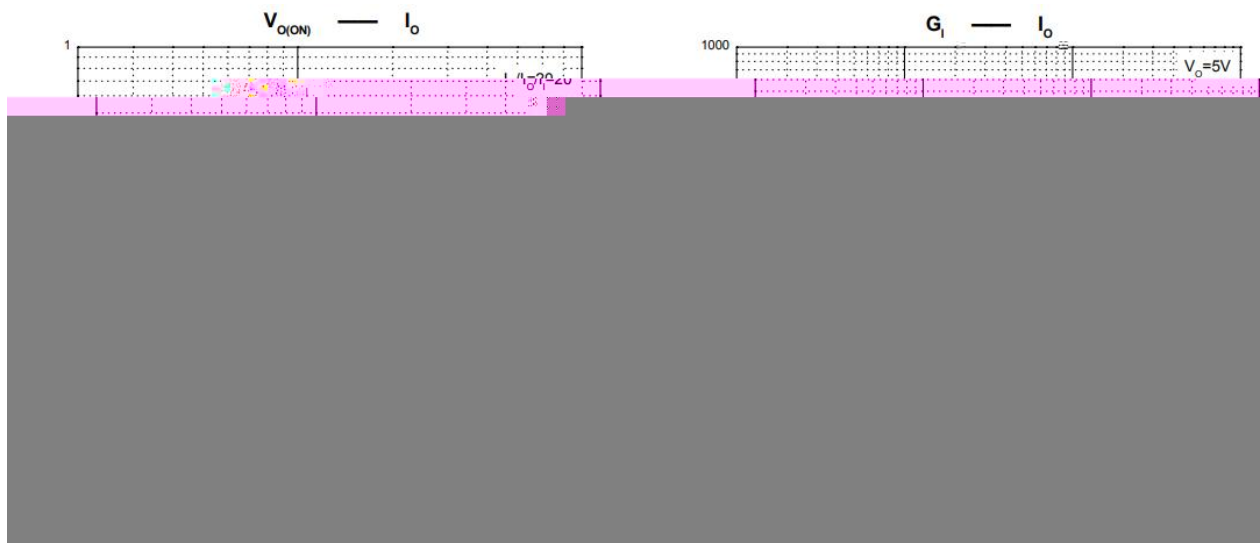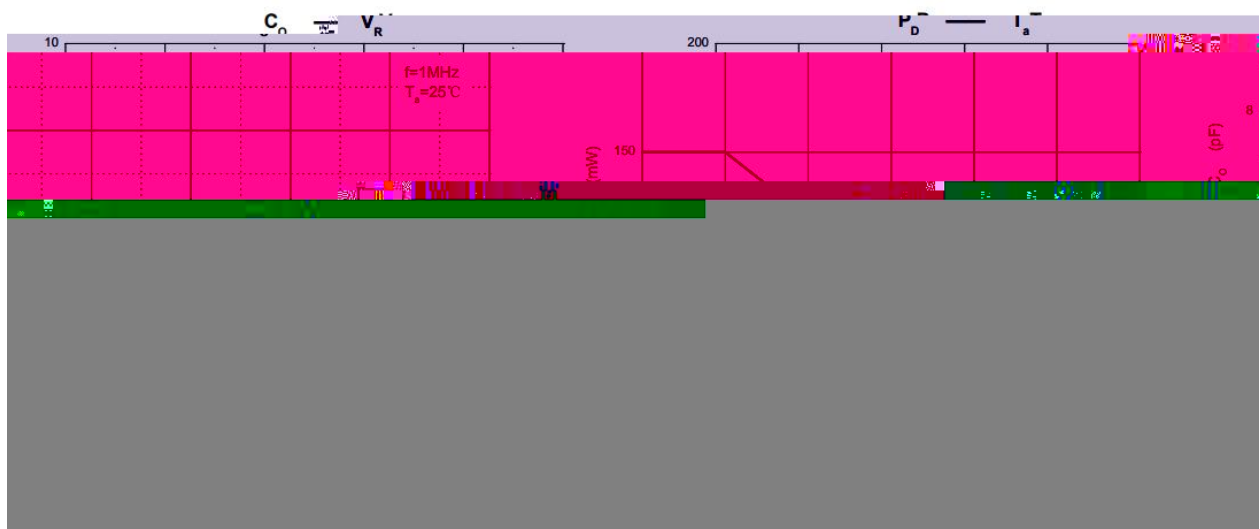



((.((O<5A<B/()1H/?2I6?2(

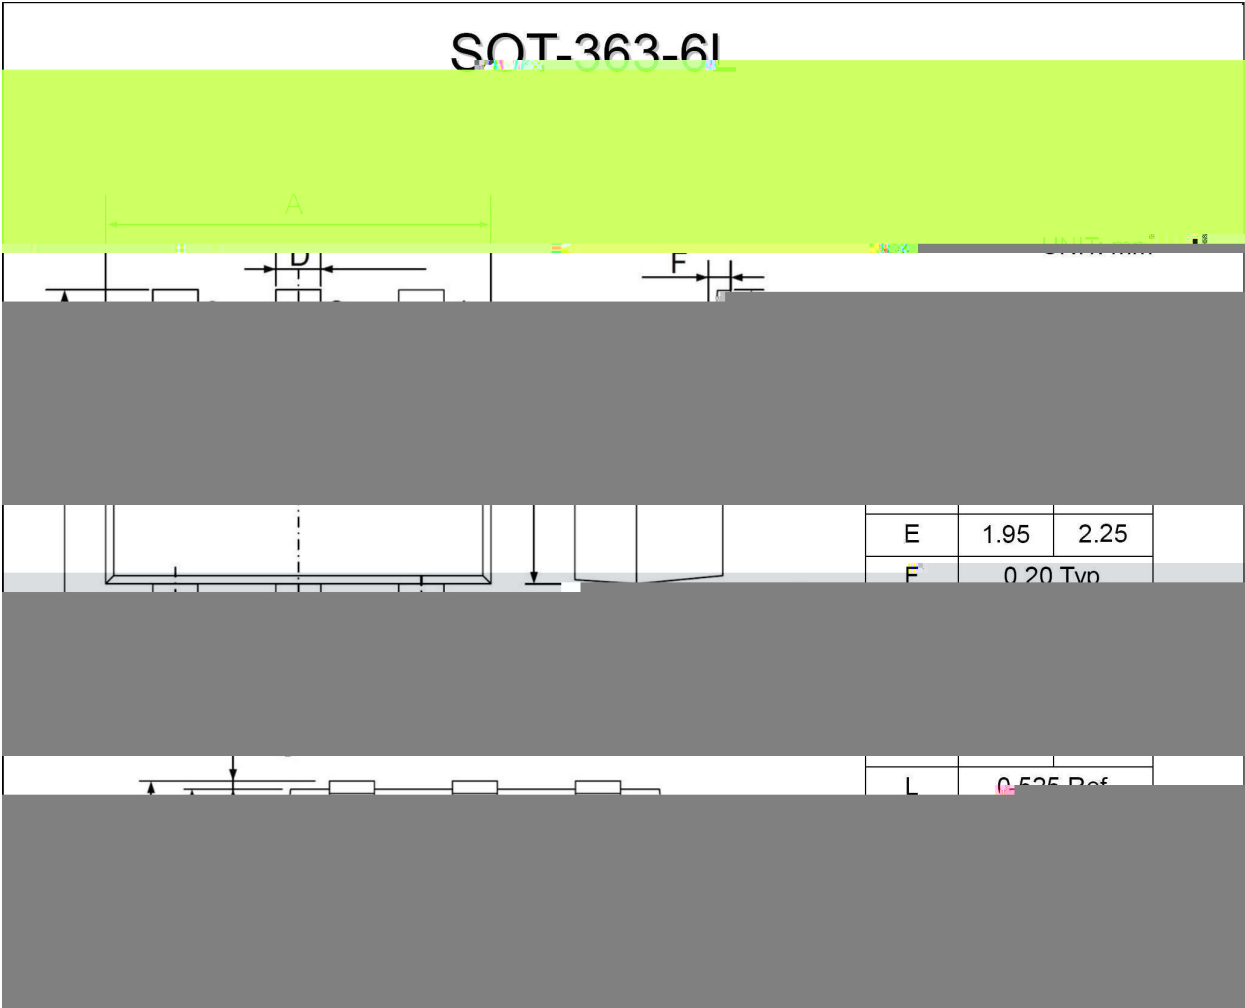




((.((<4A1?B(p?2>4D5>16?2(

H211 *
*
*

- “ 1 ”
- H211
- ***:
- Note:
- “1” Pin
- H211 Product Type Code
- ***: Lot No. Code, code change with Lot No.



I L((.(

- Note:
1. Preheating: 150~180 , Time: 60~90sec.
2. Peak Temp.: 245±5 , Duration: 5±0.5sec.
3. Cooling Speed: 2~10 /sec.
- 1 150 180 60 90sec;
2 245±5 5±0.5sec;
3 2 10 /sec.

((.(((/212>?5/(>6(' 6;3/41?B(, /<>(+/2>(: 6?31>16?2(

260±5 10±1 sec. Temp.: 260±5℃ Time: 10±1 sec

((.((O<5A<B1?B('O- :Q(

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180000	7" ×8	180×120×180	390×385×205