




Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	1200	V
Peak Reverse Voltage	V_R	1200	V
Average Rectified Forward Current	$I_{F(AV)} (T_c=110^\circ C)$	8	A
Average Rectified Forward Current(RMS)	$I_{F(RMS)} (T_c=110^\circ C)$	12	A
Non Repetitive Peak Surge Current($T_J=45^\circ C$, $t=10ms$, 50Hz, Sine)	I_{FSM}	60	A
Power Dissipation	P_D	62	W
Thermal Resistance Junction to Case	$R_{\theta JC}$	2.0	$^\circ C/W$
Junction Temperature	T_J	-55 +150	
Storage Temperature Range	T_{stg}	-55 +125	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

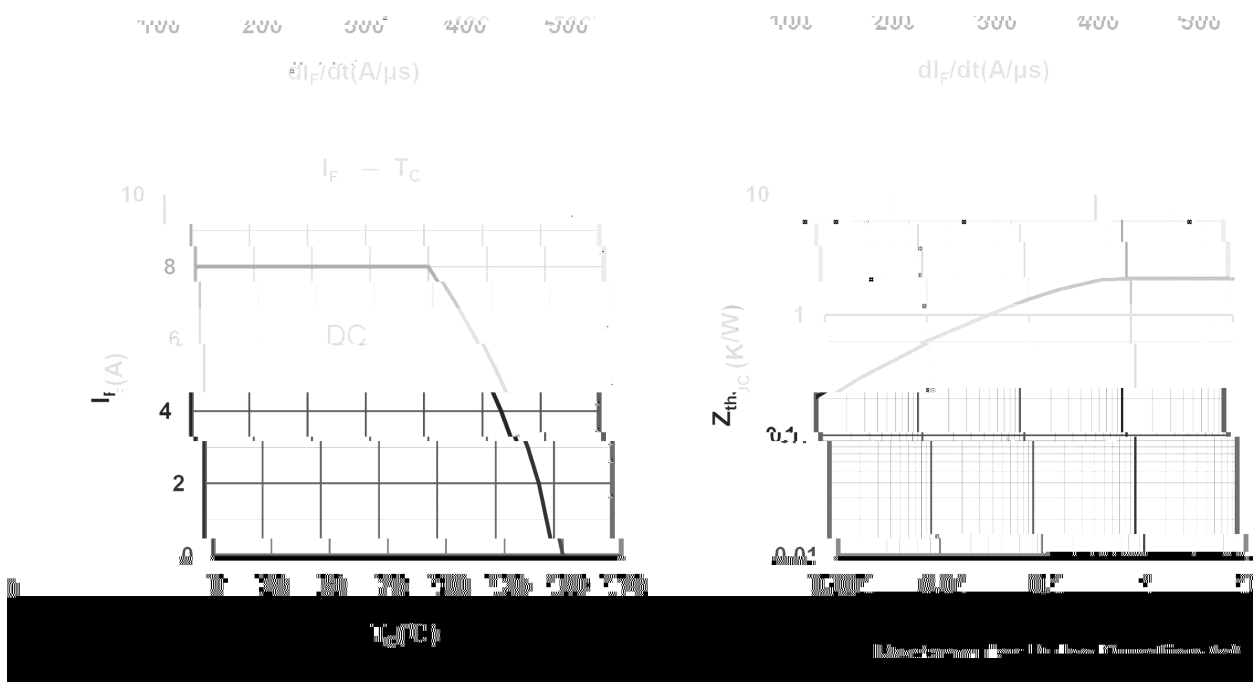

TD-220AC

Unit:mm

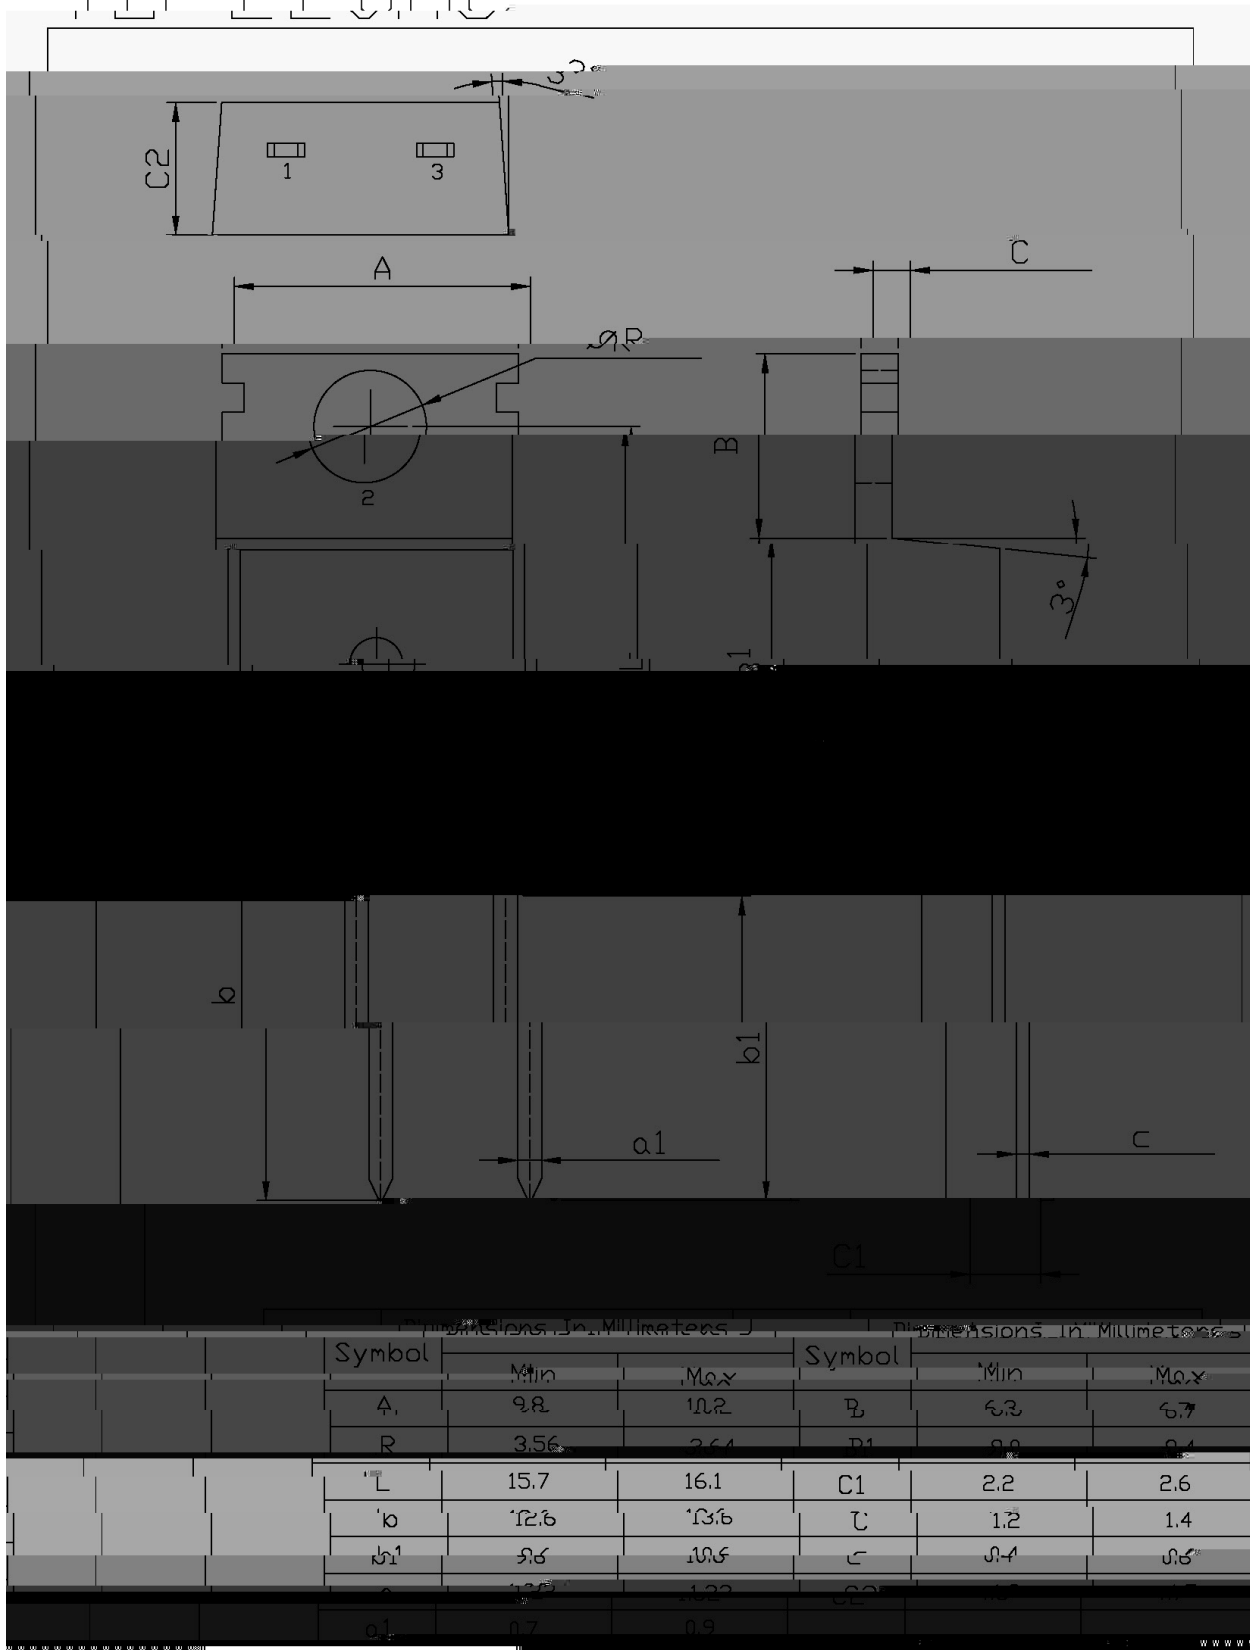



公司代码

EU

P XU3;453

Note:

BR:

MUR08120

****:

公司代码


公司代码

公司代码 公司代码

Company Code

Product Type Code.

Lot No. Code, code change with Lot No.

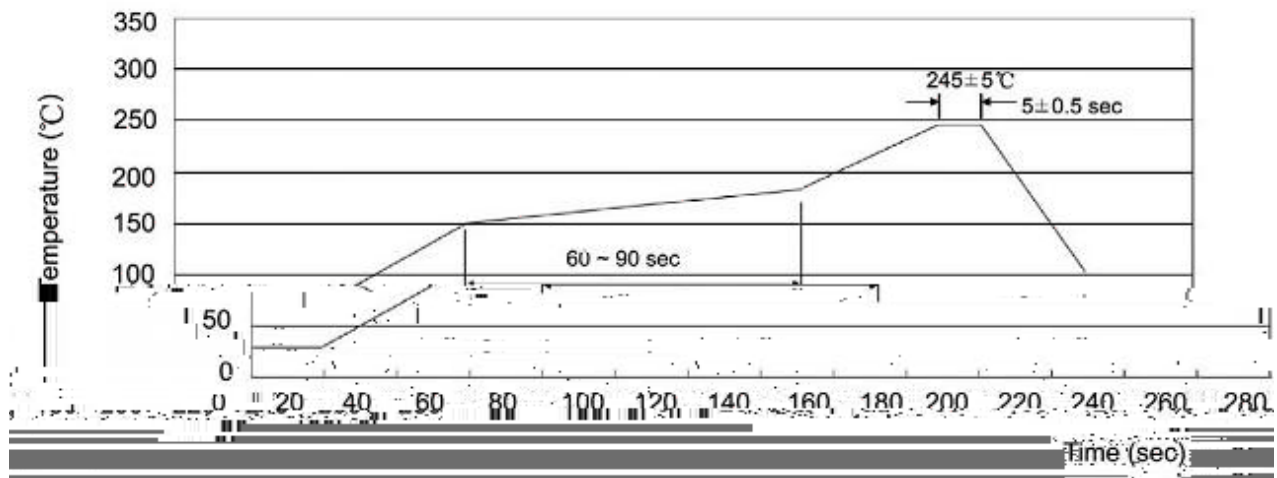

℃ ×

1. 150 ~ 180 ℃, Time: 60 ~ 90 sec;

2. 245 ± 5

Note:

1. Preheating: 150 ~ 180 ℃, Time: 60 ~ 90 sec.