



Rev.A May.-2022




Rev.A May.-2022



Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current – Continuous	I_D	170	mA
Drain Current– Pulsed	$I_D(T_C=25^{\circ}C)$	680	mA
Continuous Drain–Source	I_S	170	mA
Gate-Source Voltage	V_{GS}	± 20	V






Rev.A May.-2022

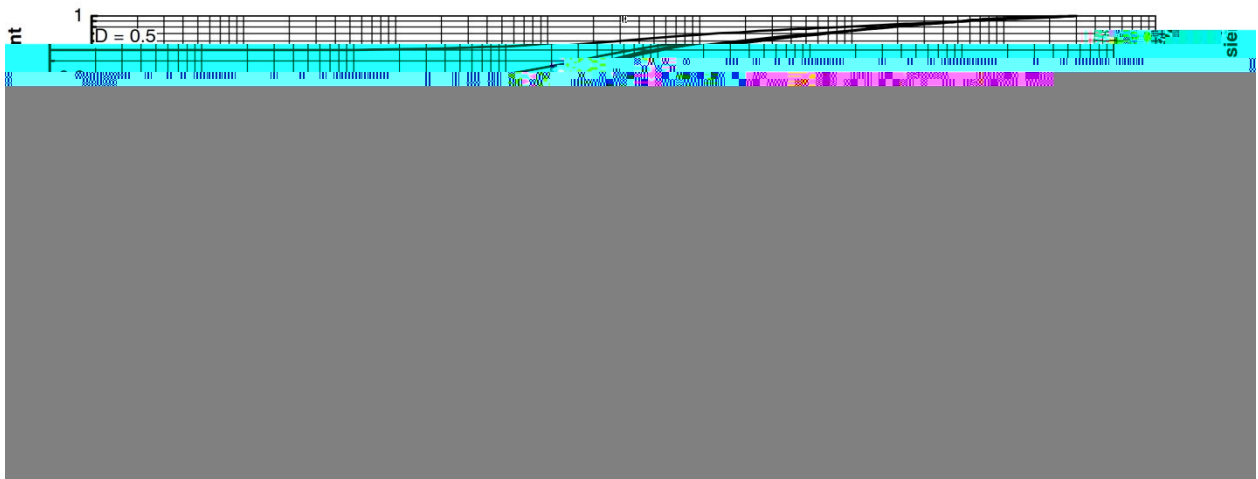

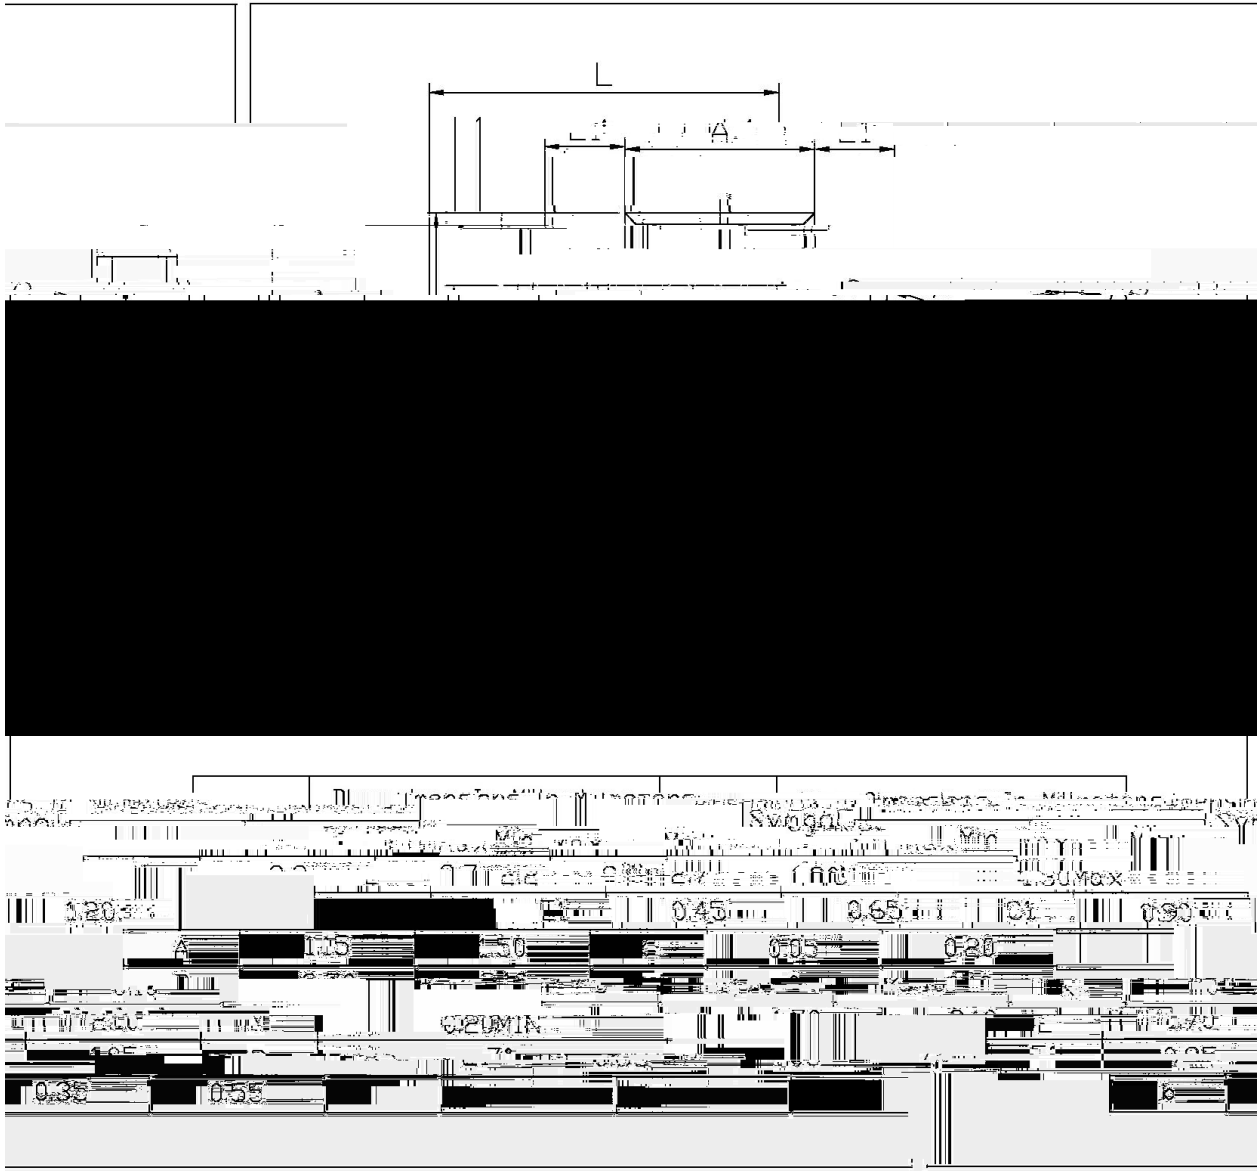



H

SA

Note:

H: Company Code

SA: Product Type



				Note:
1	150 180	60 90sec;	1.Preheating:150~180°C, Time:60~90sec.	
2	245±5	5±0.5sec;	2.Peak Temp.:245±5°C, Duration:5±0.5sec.	
3	2	10°C/sec.	3. Cooling Speed: 2~10°C/sec.	

260±5°C

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL