


/ Package Dimensions

SOD-123FL



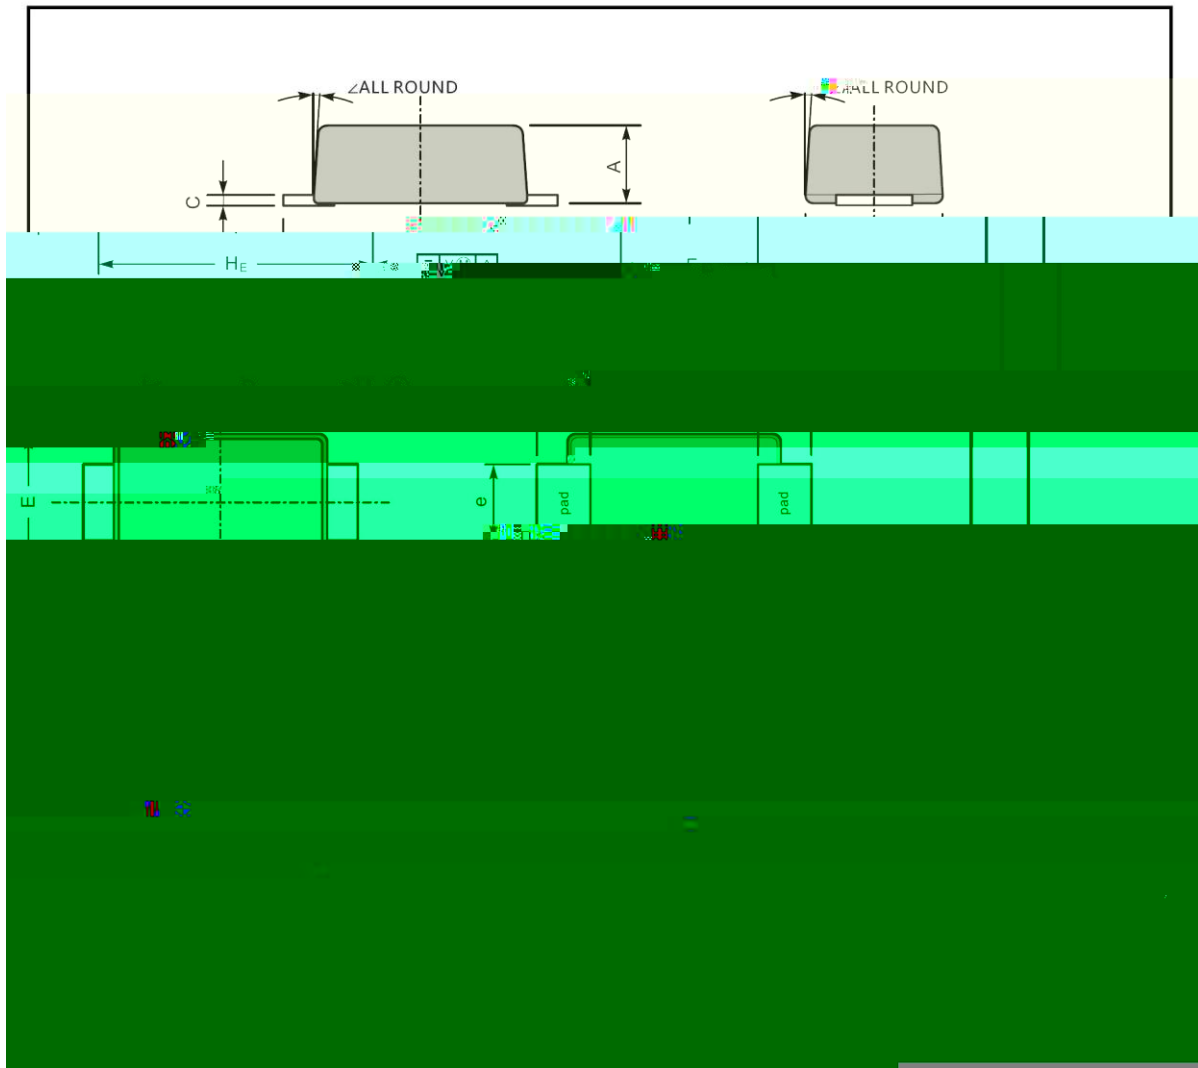


/ Marking Instructions

Marking

Type number	Marking code
DS12W	S12
DS14W	S14

/ Marking Instructions

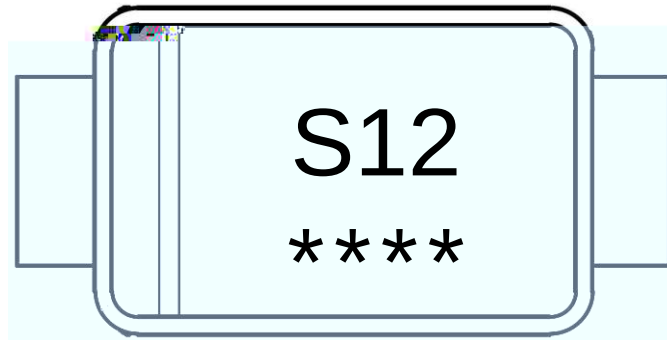

****y

*~V/

*~V/


Note:

Product Type Code

****y

Lot No. Codek The 1st "*" means:YM Codek The last 3 "*" means:little Lot
No Code

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



①

10% 25½ 150- $\text{k}\Omega$ 60½ 90sec;
 20% 245r 5- $\text{k}\Omega$ 5r 0.5sec;
 30% 2½ 10- /sec.

Note:

1.Preheating:25~150- , Time:60~90sec.
 2.Peak Temp.:245r 5- , Duration:5r 0.5sec.
 3. Cooling Speed: 2~10- /sec.

/ Resistance to Soldering Heat Test Conditions

② 260r 5- ③ 10r 1 sec. Temp.:260r 5- Time:10r 1 sec

/ Packaging SPEC.

2& x / REEL

Package Type