

5 é / Descriptions

95: .>//x J· 6 4 6 â o


α a / Features

~x å k ç Ł k×5 « ^y ò- v i k)í D }o


Đ ÷ / Applications

9 ...o F, Ło μ Ł Y C Ü Ł o

Ã W] Ô · / Equivalent Circuit



• Ô - æ / Pinning

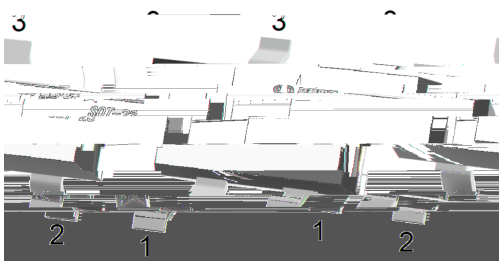

y

y


y

Z Ü B , M V / h_{FE} Classifications & Marking


--	--

@	Z		% y

Electrical Characteristic Curve

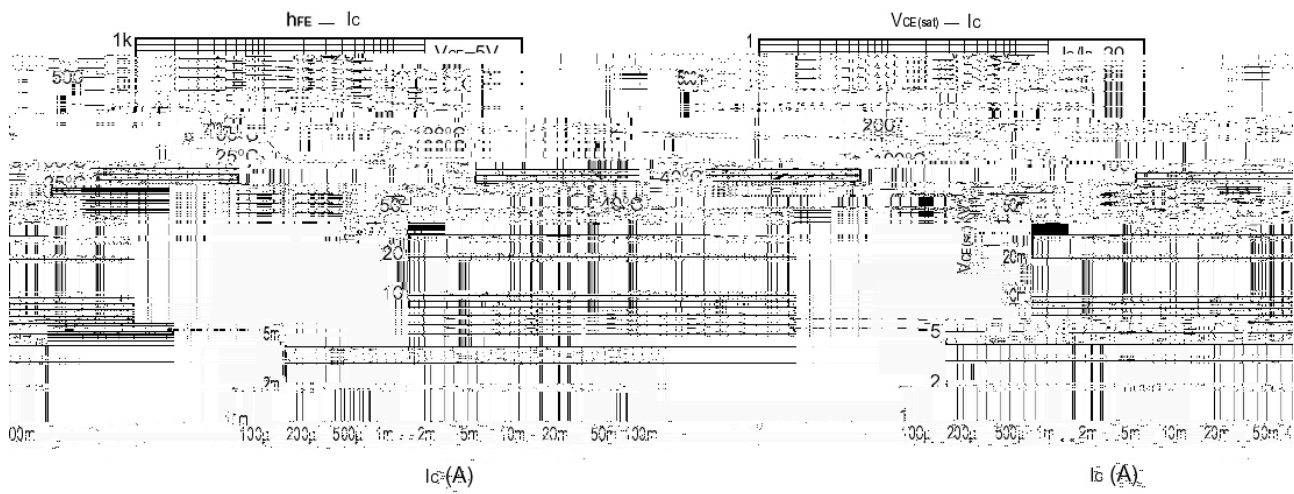

, M y f / Marking Instructions

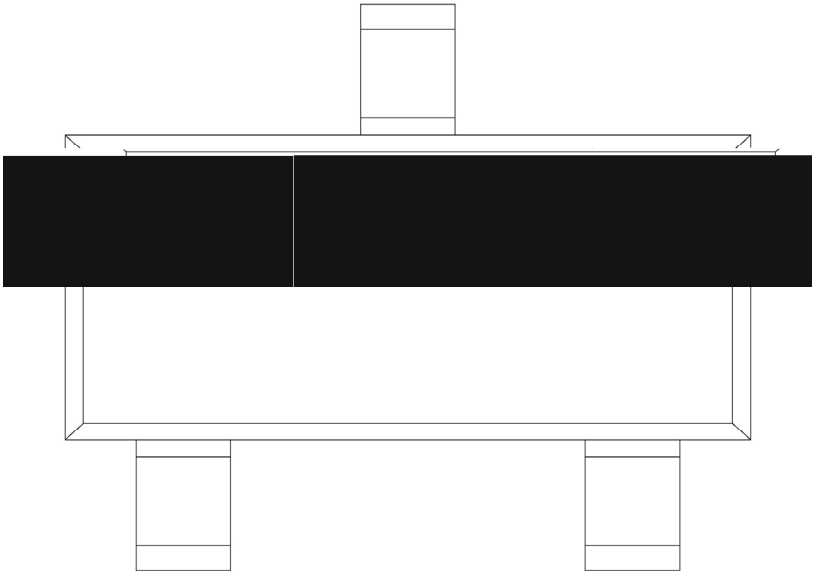

“ ϕ y
. y , [W A
y ” Z W A

. y
y

[illegible]

$O \sim \%$ $\%$ - k $\%$ -
 $O \sim Q$ r - k 4 $\bar{O}$ r r - r
 $O \sim D \sim N \sim \bar{O}$, $\%$ - -

AD /Cap⁻»] / Resistance to Soldering Heat Test Conditions

$$y \quad r \quad - \quad y \quad r$$

G P á / Packaging SPEC.

; $\hat{u}$!H

; > p .

 $\mathbb{A}^1$
$$7 > \hat{u} \sim E$$