
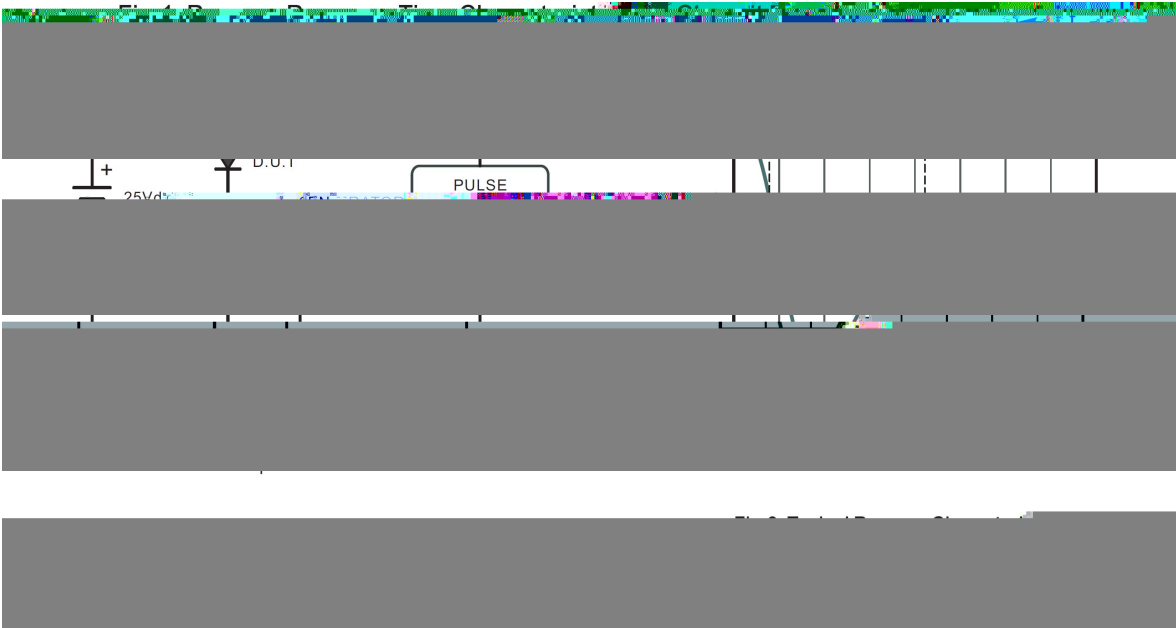



Parameter	Symbol	Rating							Unit
		ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	V

0 8 9 = > ? / Electrical Characteristic Curve

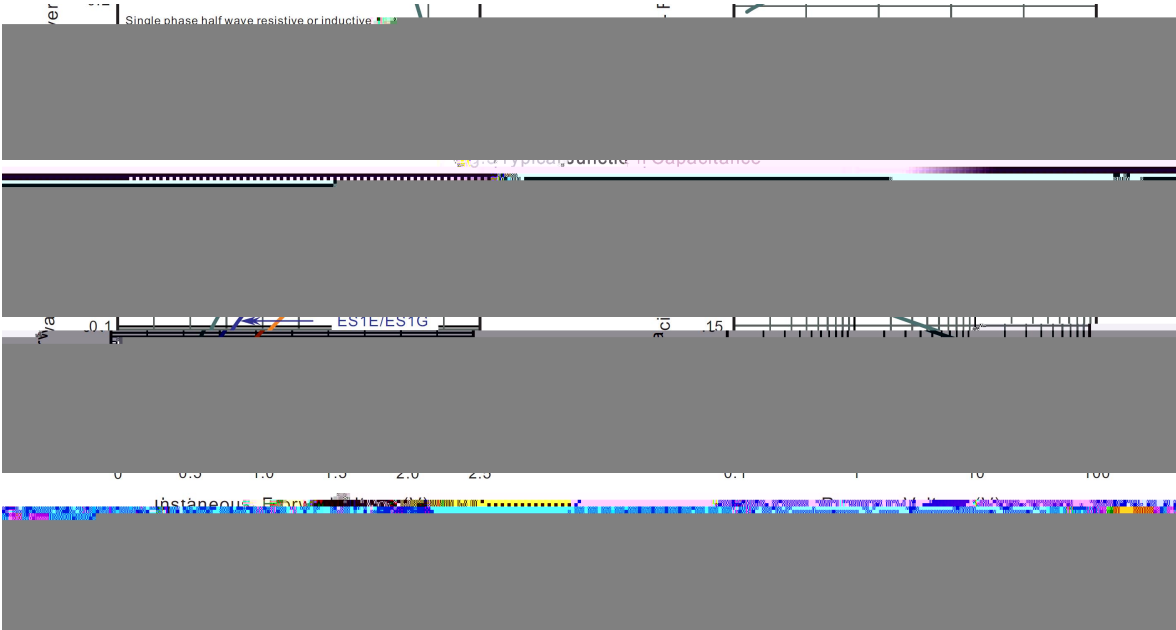

@ A B C ? / Package Dimensions

SMA

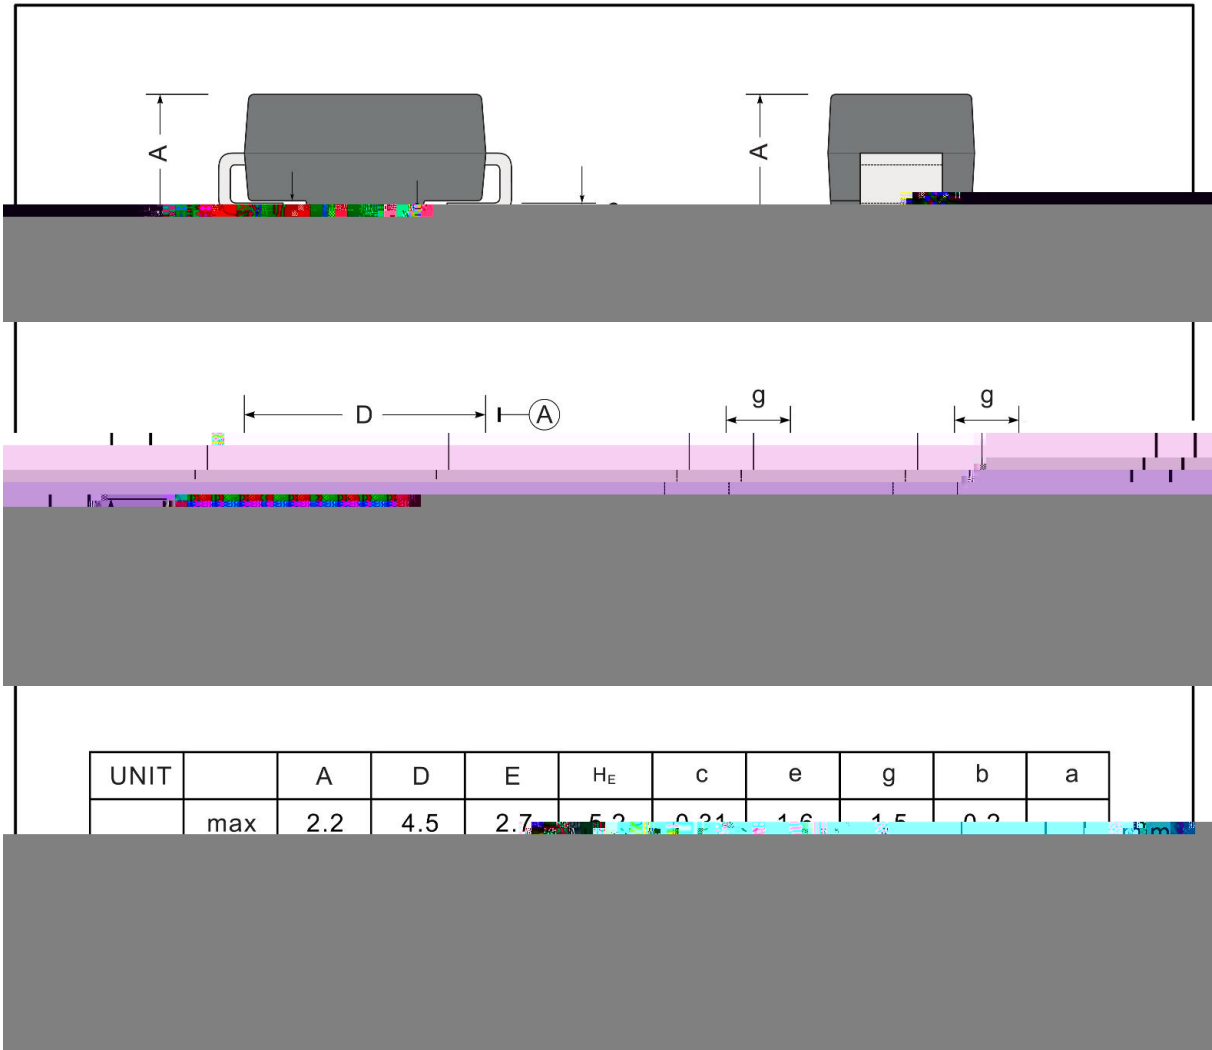

3 F

**** Lot No. Code The 1st F means:YM Code The 1st B means:little Lot No

H I J K L = > ? (M N) / O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

Note:

1 150 180 60 90sec;
2 245±5

1.Preheating:150~180°C, Time:60~90sec.