



--	--	--	--	--



Rev.A Mar.-2021

00

2 0A SMA

Surface Mount Superfast Recovery Rectifier, Reverse Voltage:800V,Forward Current:2.0






Parameter	Symbol	Rating	Unit
-----------	--------	--------	------



0 8 9 = > ?



Fig-1 Reverse Recovery Time Characteristic And Test Circuit Diagram

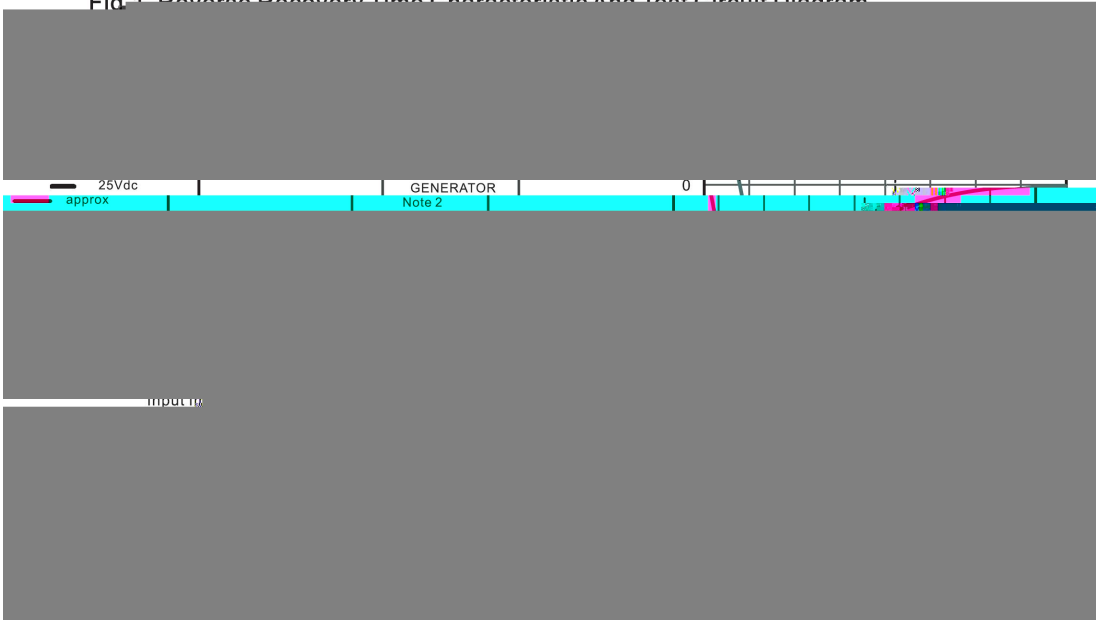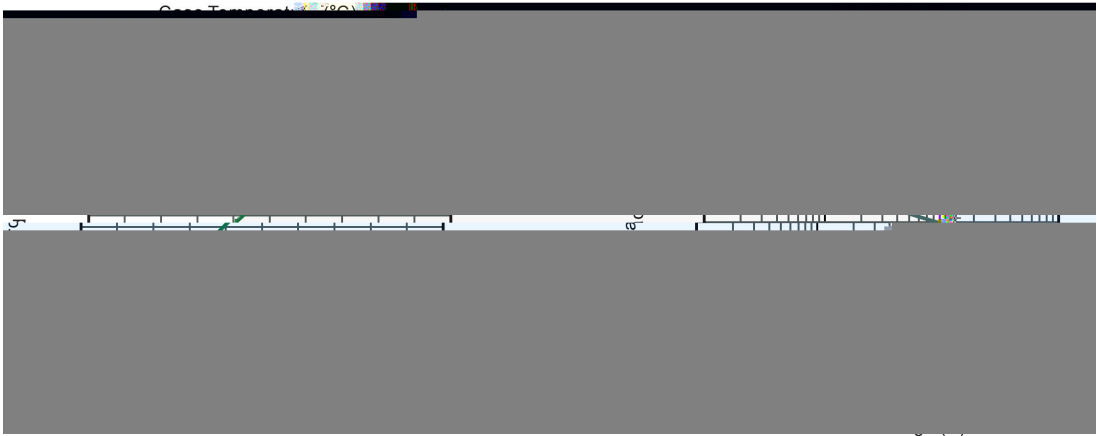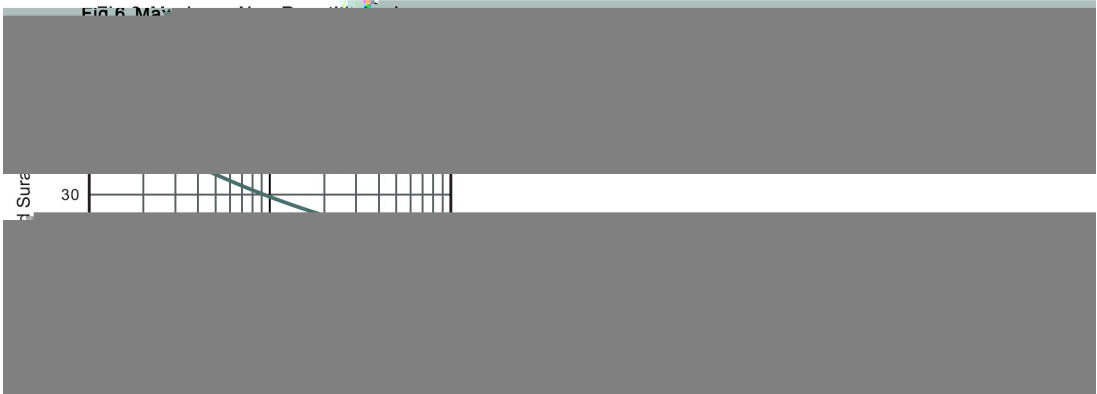



@ABC?


SMA

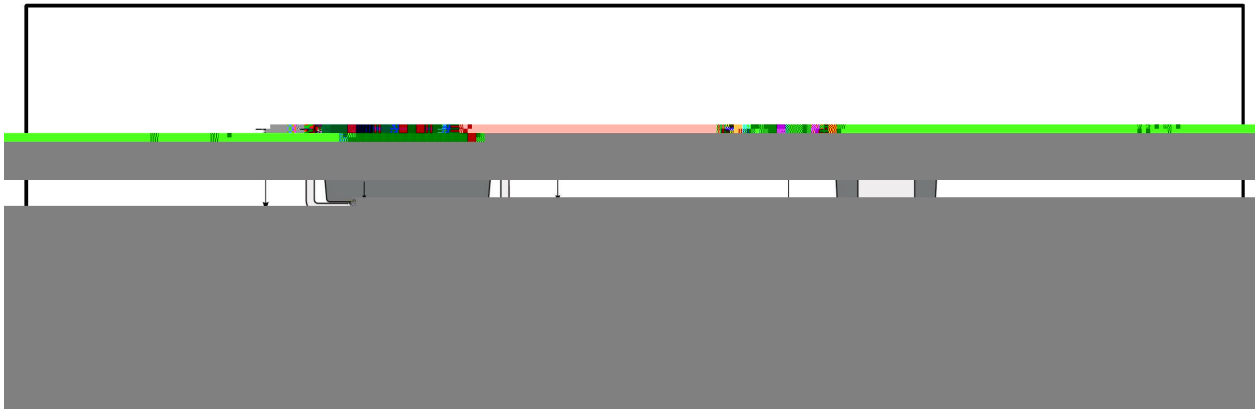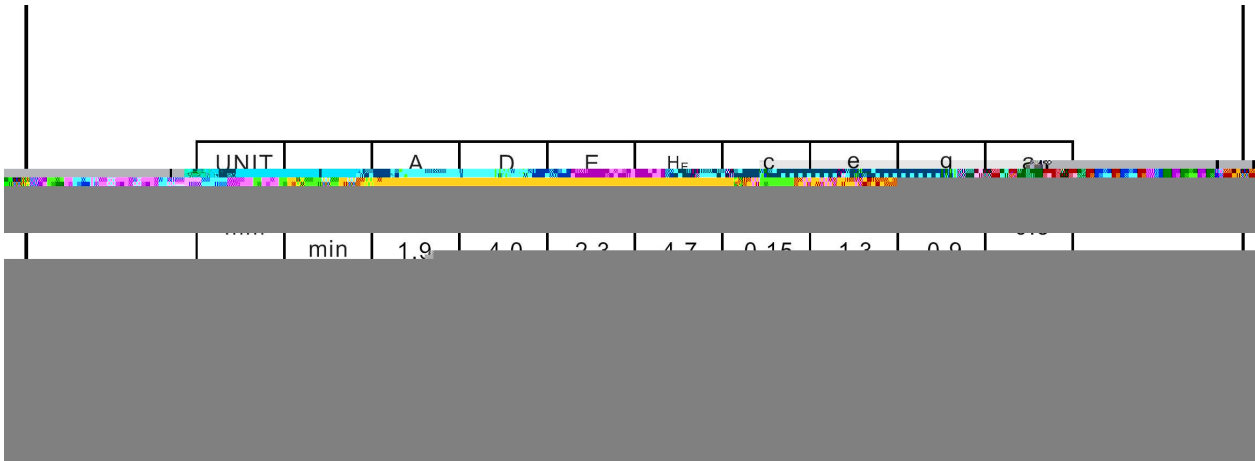

Rev.A Mar.-2021



H I J K L = > ? M N O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

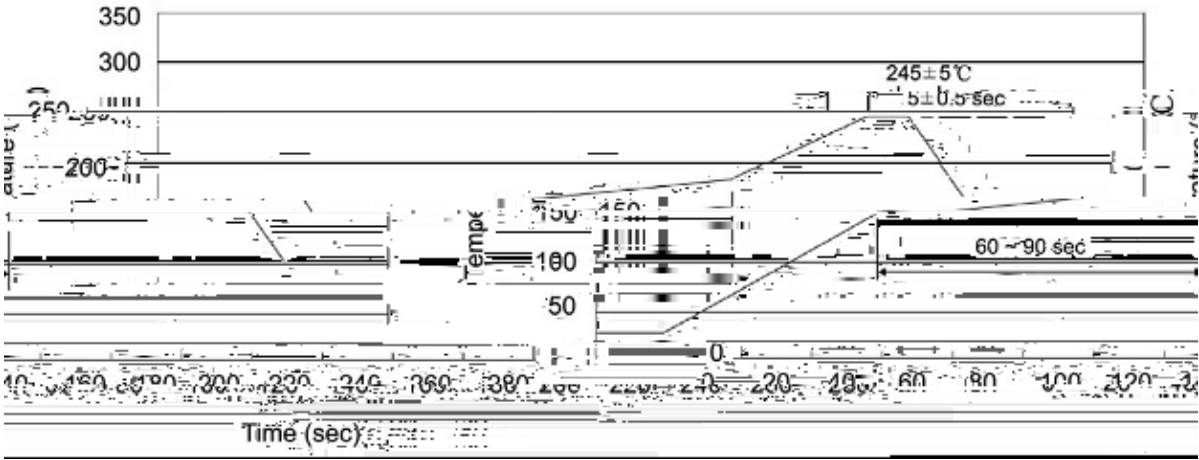

- Note:
- 1. Preheating: 150~180°C, Time: 60~90sec.
 - 2. Peak Temp.: 245±5°C, Duration: 5±0.5sec.
 - 3. Cooling Speed: 2~10°C/sec.

h J i j k l m n

M

260±5°C 10±1 sec. Temp.: 260±5°C Time: 10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SMA							380X336X40	380X335X366